

Shrubbler® Drip System

(XC350)

The following instructions were provided by the manufacturer.



The Quick Disconnect Tap Adapter with Snap on Filter makes it very simple to connect to your water supply. This advantage will ensure that your system will be worry free for years to come.


Lay Out Your System — Routing the Pipe/Tubing

The **Mainline or Supply Tubing** should then be laid out in the area you desire. Poly tubing is very flexible and can be installed below or above ground and covered with mulch. Remember that this is the main supply and should be centrally placed.


The **Mainline Fittings** should be used with the 1/2" Mainline Pipe. Couplings, Elbows, Tees and End Plugs are available for custom installation or zoning.

** Once installed and connected to the water source, initial flushing is recommended and then cap the mainline tube with the end cap.*

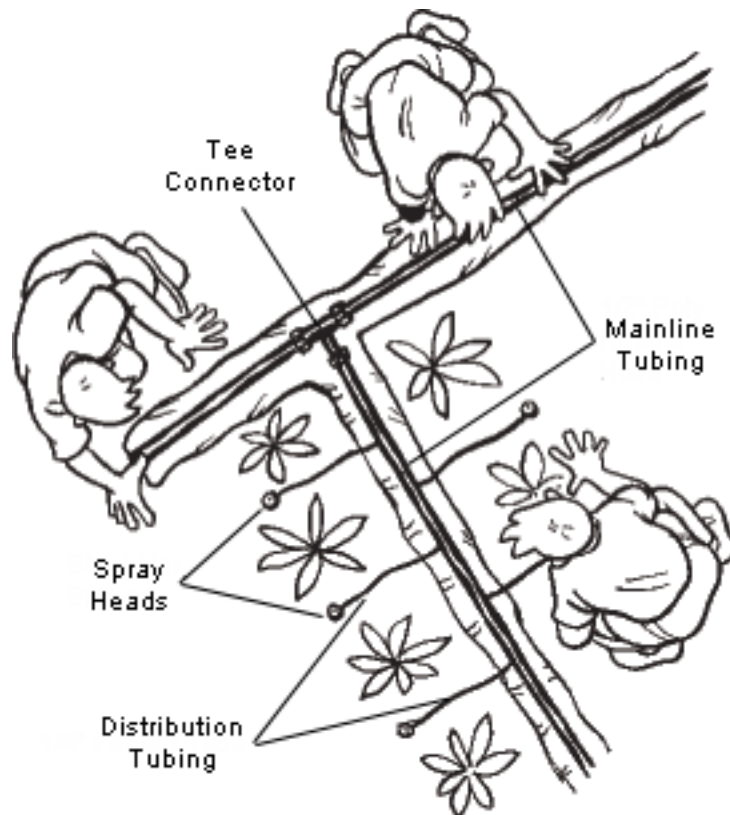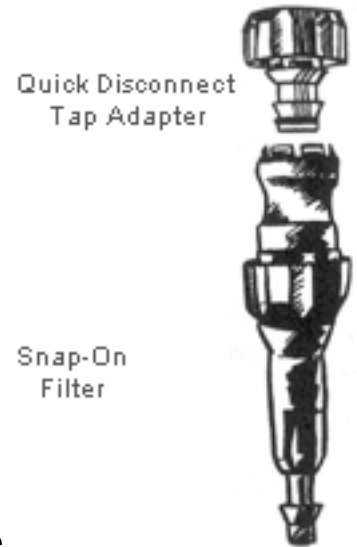

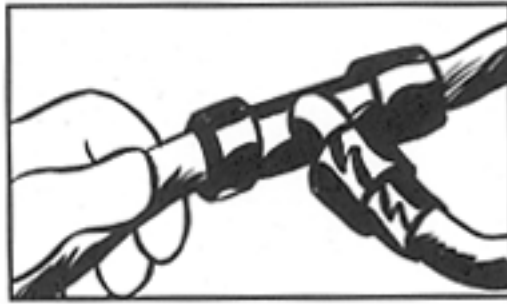

1. Use straight, elbow or tee connectors to extend or repair mainline tubes. Just push the tube in — an internal pressure lip holds it tight.

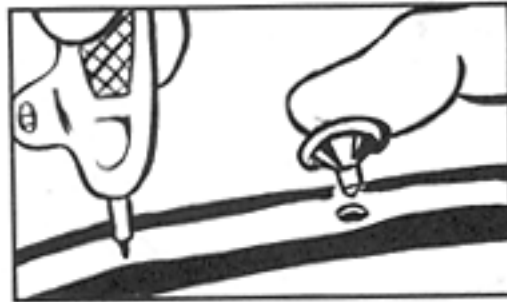

2. Punch the mainline tube with the tool where you want to insert distribution tubes. If you make a mistake, just insert a goof plug.



3. Distribution tube connectors join mainline and distribution tubes or link distribution tubes.

Before starting your next section, flush out the lines, then cap your mainline tubes. If you have a large system, use several tee connectors with short mainline tubes and end caps for additional drainage spots along the mainline tubes.