



US011038658B2

(12) **United States Patent**
Vissamsetty et al.

(10) **Patent No.:** **US 11,038,658 B2**
(45) **Date of Patent:** **Jun. 15, 2021**

(54) **DECEIVING ATTACKERS IN ENDPOINT SYSTEMS**

47/32; H04L 63/1491; H04L 61/2592;
H04L 12/4633; H04L 63/0209; H04L
61/2015; H04L 63/1416

(71) Applicant: **Attivo Networks Inc.**, Fremont, CA
(US)

See application file for complete search history.

(72) Inventors: **Venu Vissamsetty**, San Jose, CA (US);
Muthukumar Lakshmanan, Bangalore
(IN)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(73) Assignee: **ATTIVO NETWORKS INC.**,
Fremont, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 98 days.

7,464,407 B2 * 12/2008 Nakae H04L 63/0227
713/182
7,958,549 B2 * 6/2011 Nakae H04L 63/101
726/11
2002/0194489 A1 * 12/2002 Almogy H04L 63/1491
726/24
2006/0230129 A1 * 10/2006 Swami H04W 12/1204
709/223
2008/0022000 A1 * 1/2008 Furuya H04L 65/1069
709/228
2009/0158418 A1 * 6/2009 Rao H04L 63/0272
726/12
2012/0185563 A1 * 7/2012 Sugiyama H04L 63/029
709/217

(21) Appl. No.: **16/420,074**

(22) Filed: **May 22, 2019**

(65) **Prior Publication Data**

US 2020/0374087 A1 Nov. 26, 2020

(51) **Int. Cl.**

H04L 5/00 (2006.01)
H04L 29/06 (2006.01)
H04L 12/721 (2013.01)
H04L 29/12 (2006.01)
H04L 12/823 (2013.01)

(52) **U.S. Cl.**

CPC **H04L 5/0055** (2013.01); **H04L 45/72**
(2013.01); **H04L 47/32** (2013.01); **H04L**
61/256 (2013.01); **H04L 61/2592** (2013.01);
H04L 63/0428 (2013.01); **H04L 63/1491**
(2013.01); **H04L 69/16** (2013.01)

(58) **Field of Classification Search**

CPC H04L 5/0055; H04L 69/16; H04L 45/72;
H04L 63/0428; H04L 61/256; H04L

(Continued)

Primary Examiner — Abdullahi E Salad


(74) *Attorney, Agent, or Firm* — David R. Stevens;
Stevens Law Group

(57)

ABSTRACT

An endpoint executes a deflection service that detects failed connection attempts (TCP RST packets) and evaluates whether they are likely the result of a reconnaissance attack. If an inbound connection fails, a connection request packet (TCP SYN) is sent to a decoy server that includes data from the TCP RST packet. The decoy server then completes a connection handshake with a destination of the TCP RST packet and engages a process at the destination. If an outbound connection fails, the deflection service facilitates a connection between a process executing on the endpoint and the decoy server and associated with a destination port referenced by the TCP RST packet.

17 Claims, 8 Drawing Sheets

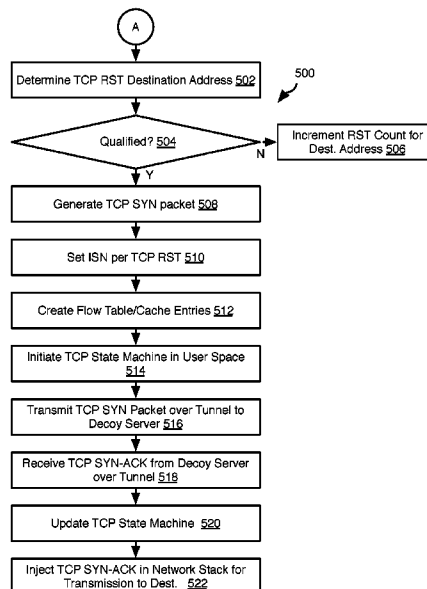

(56)

References Cited

U.S. PATENT DOCUMENTS

2014/0150094	A1 *	5/2014	Rao	H04L 63/1458
				726/22
2015/0257194	A1 *	9/2015	Cho	H04L 43/028
				370/329
2017/0331856	A1 *	11/2017	Vissamsetty	H04L 63/1491
2018/0063187	A1 *	3/2018	St. Pierre	H04L 63/1433
2019/0068642	A1 *	2/2019	Araujo	H04L 63/1425

* cited by examiner

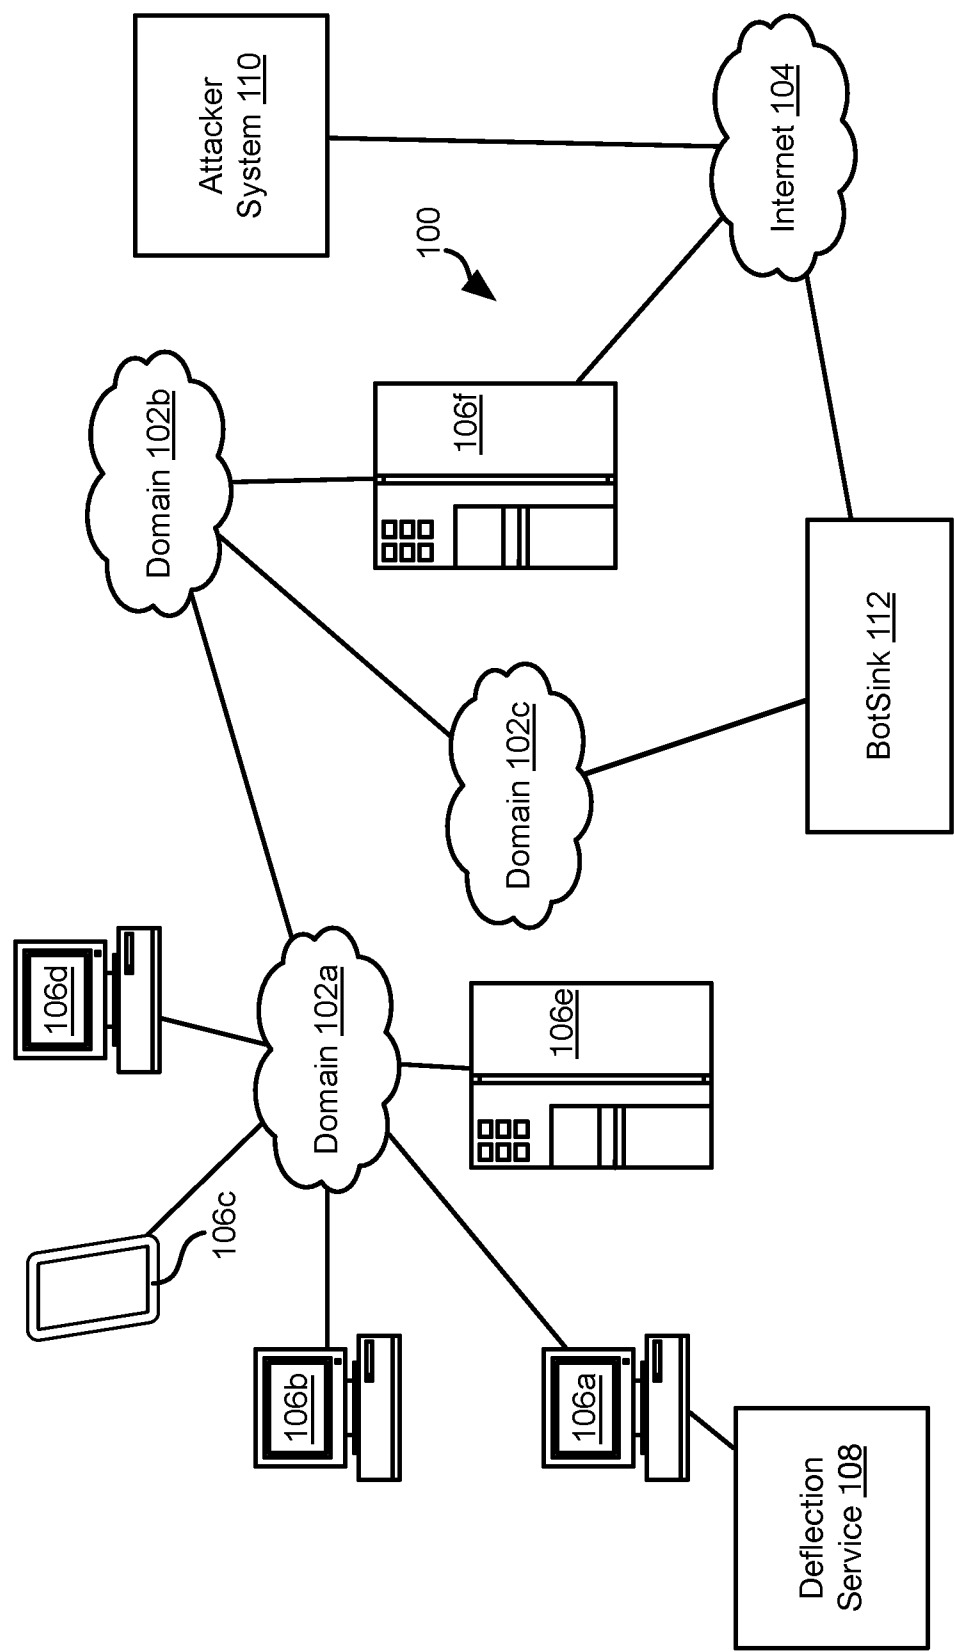


Fig. 1

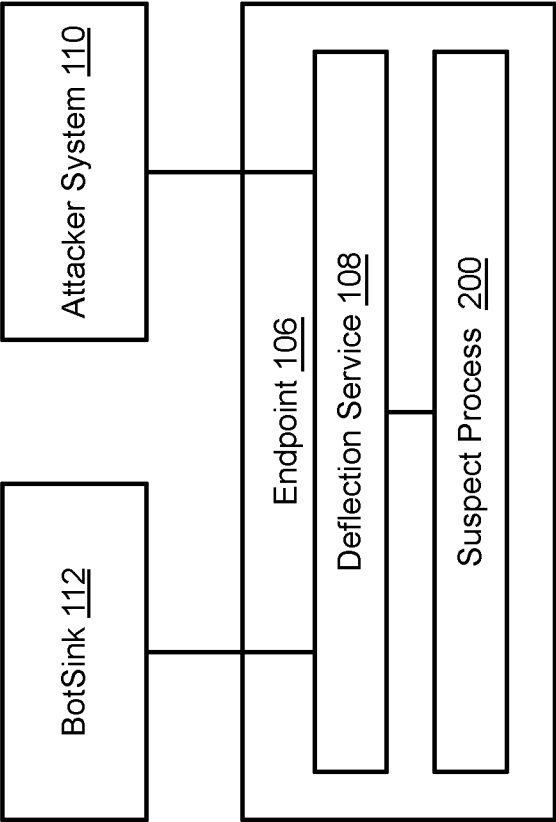


Fig. 2

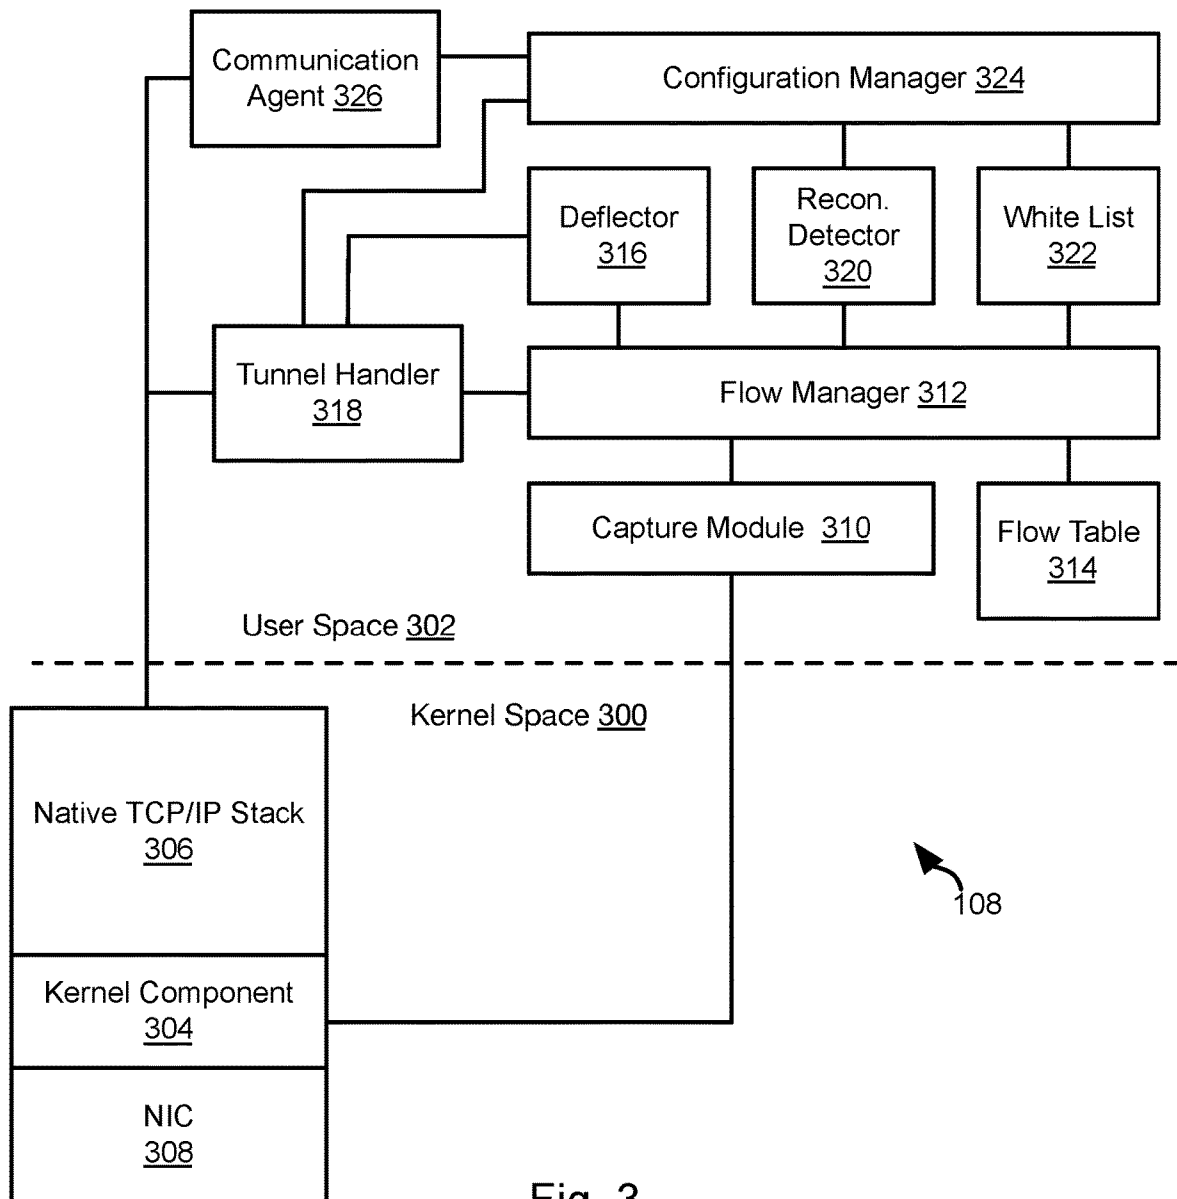


Fig. 3

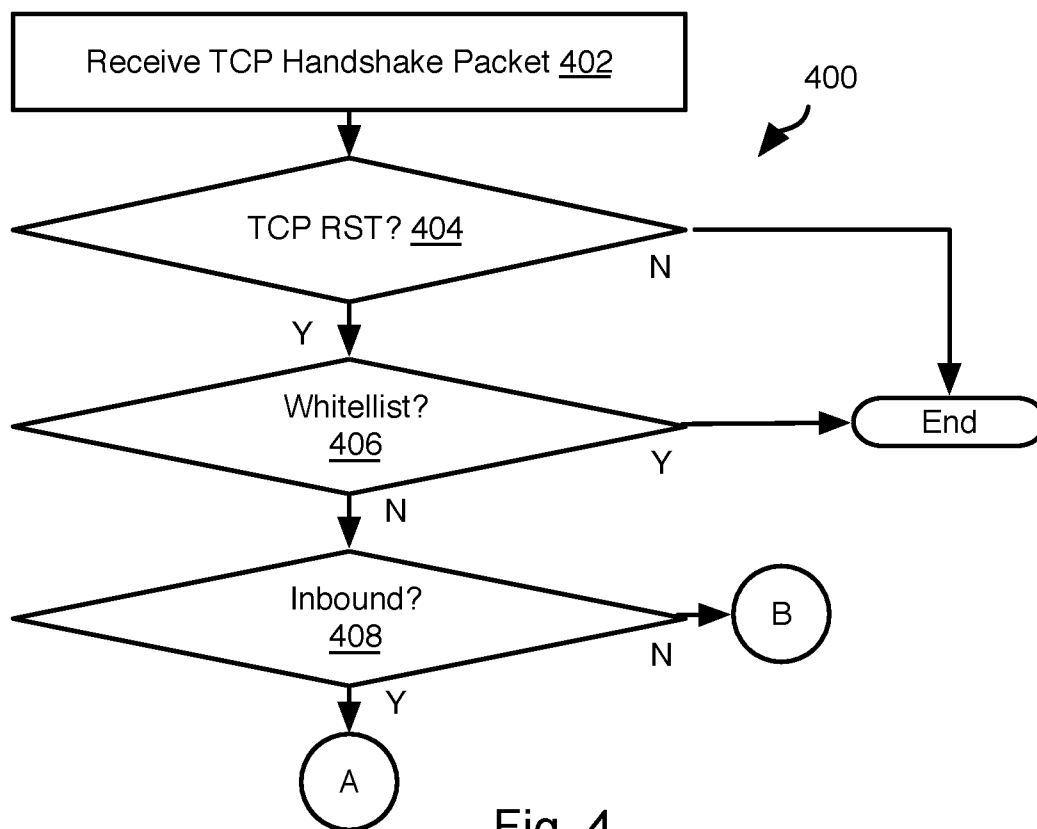


Fig. 4

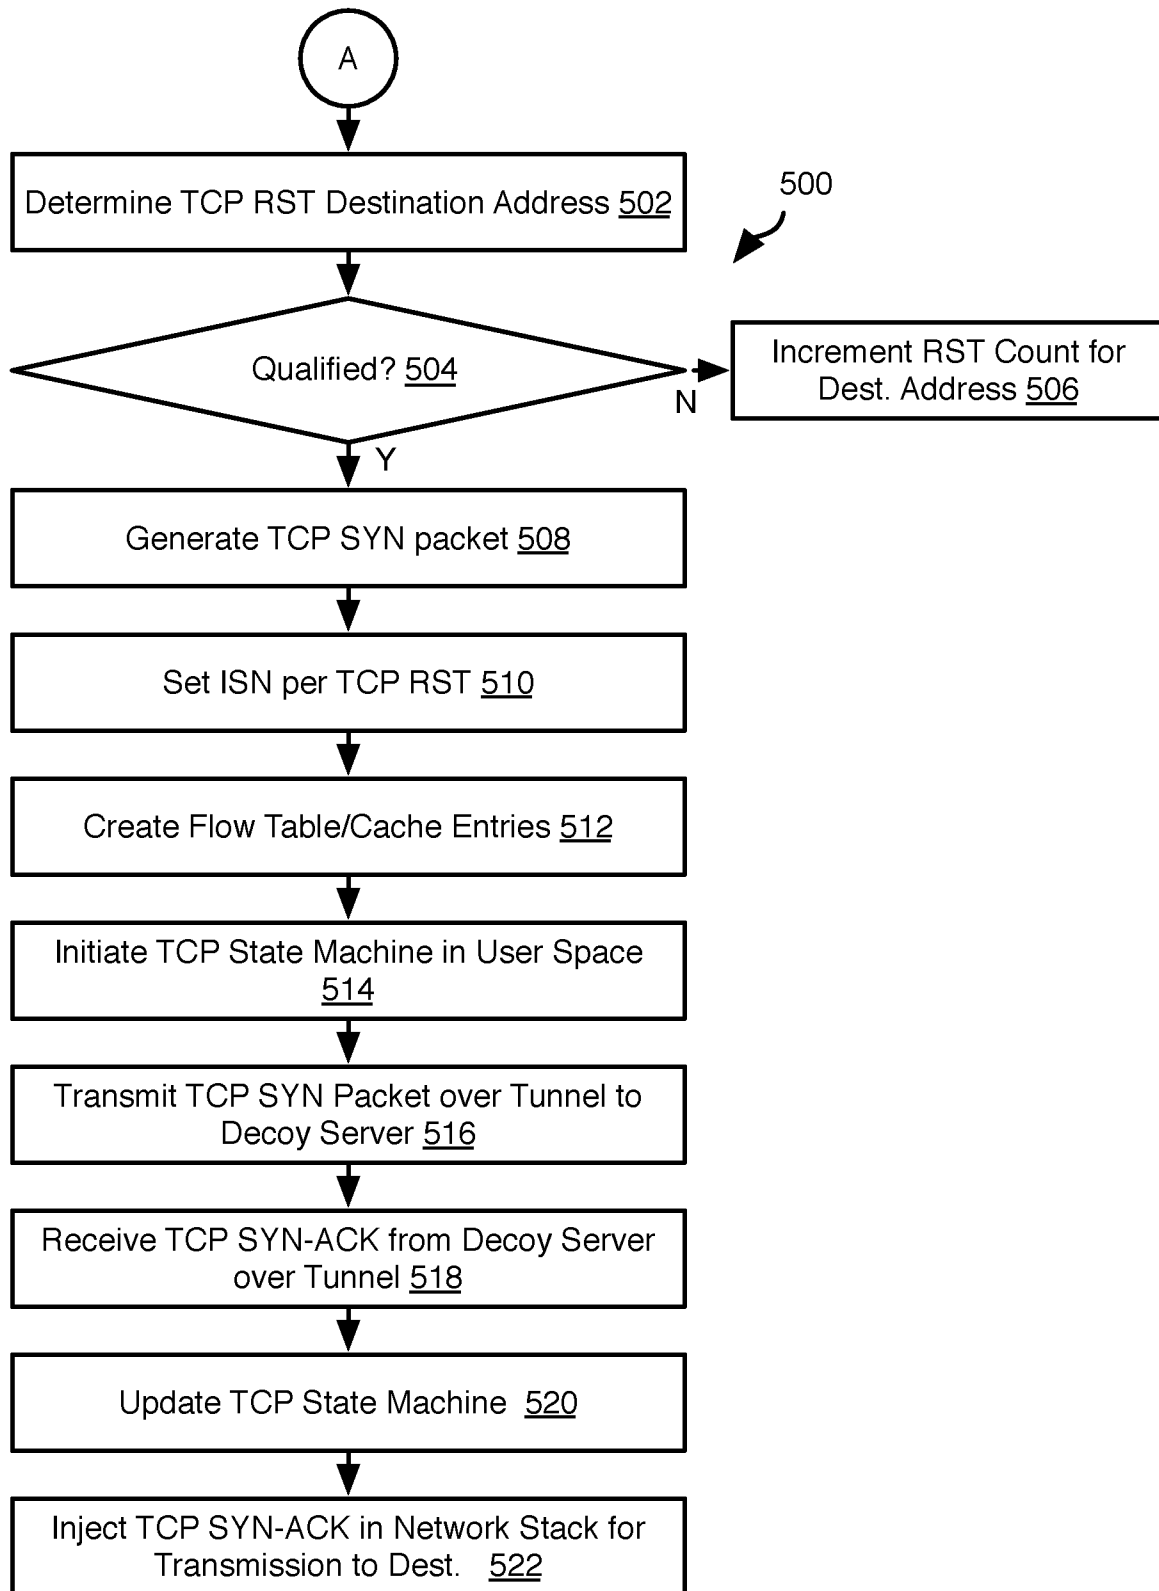


Fig. 5

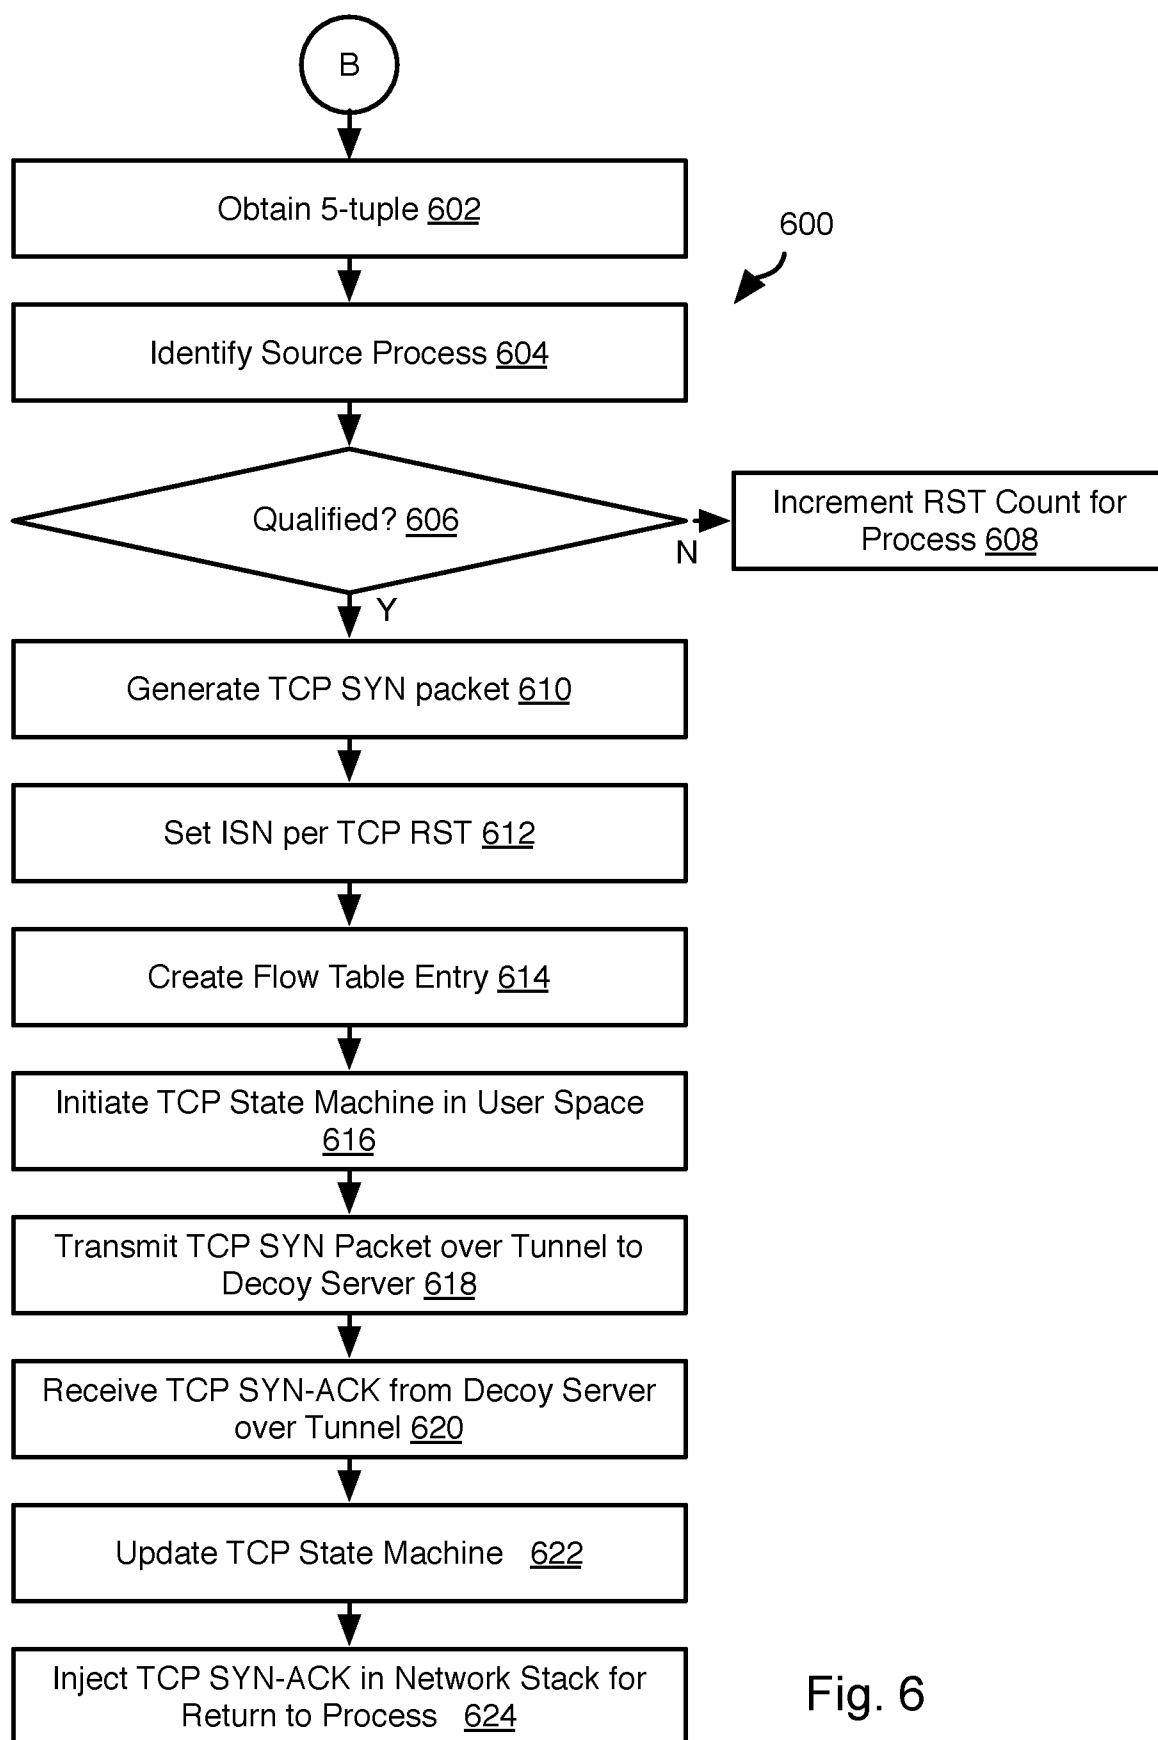


Fig. 6

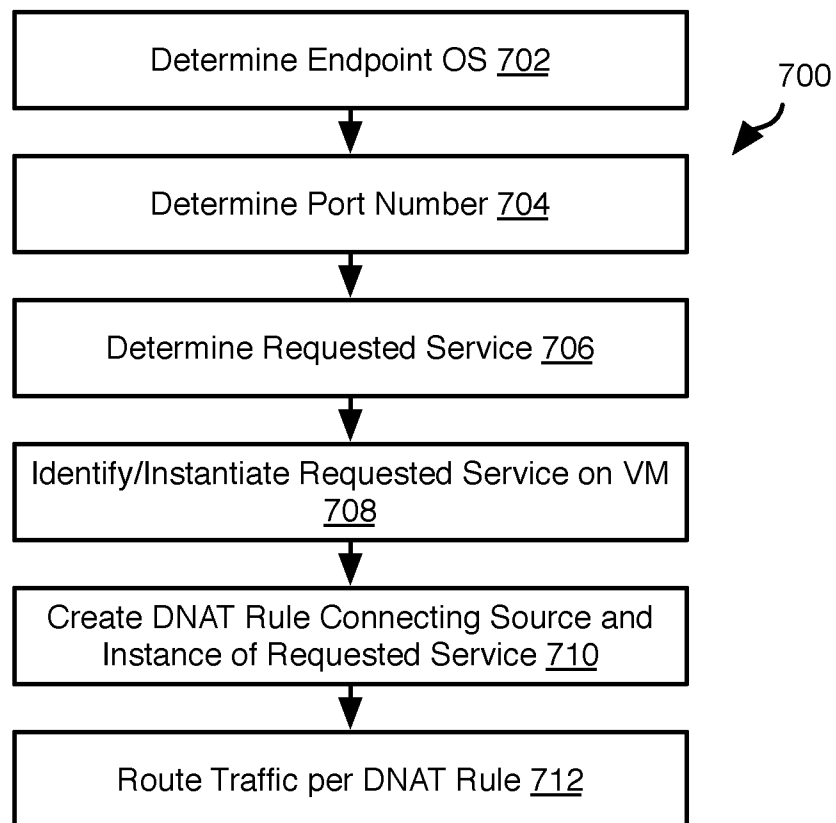


Fig. 7

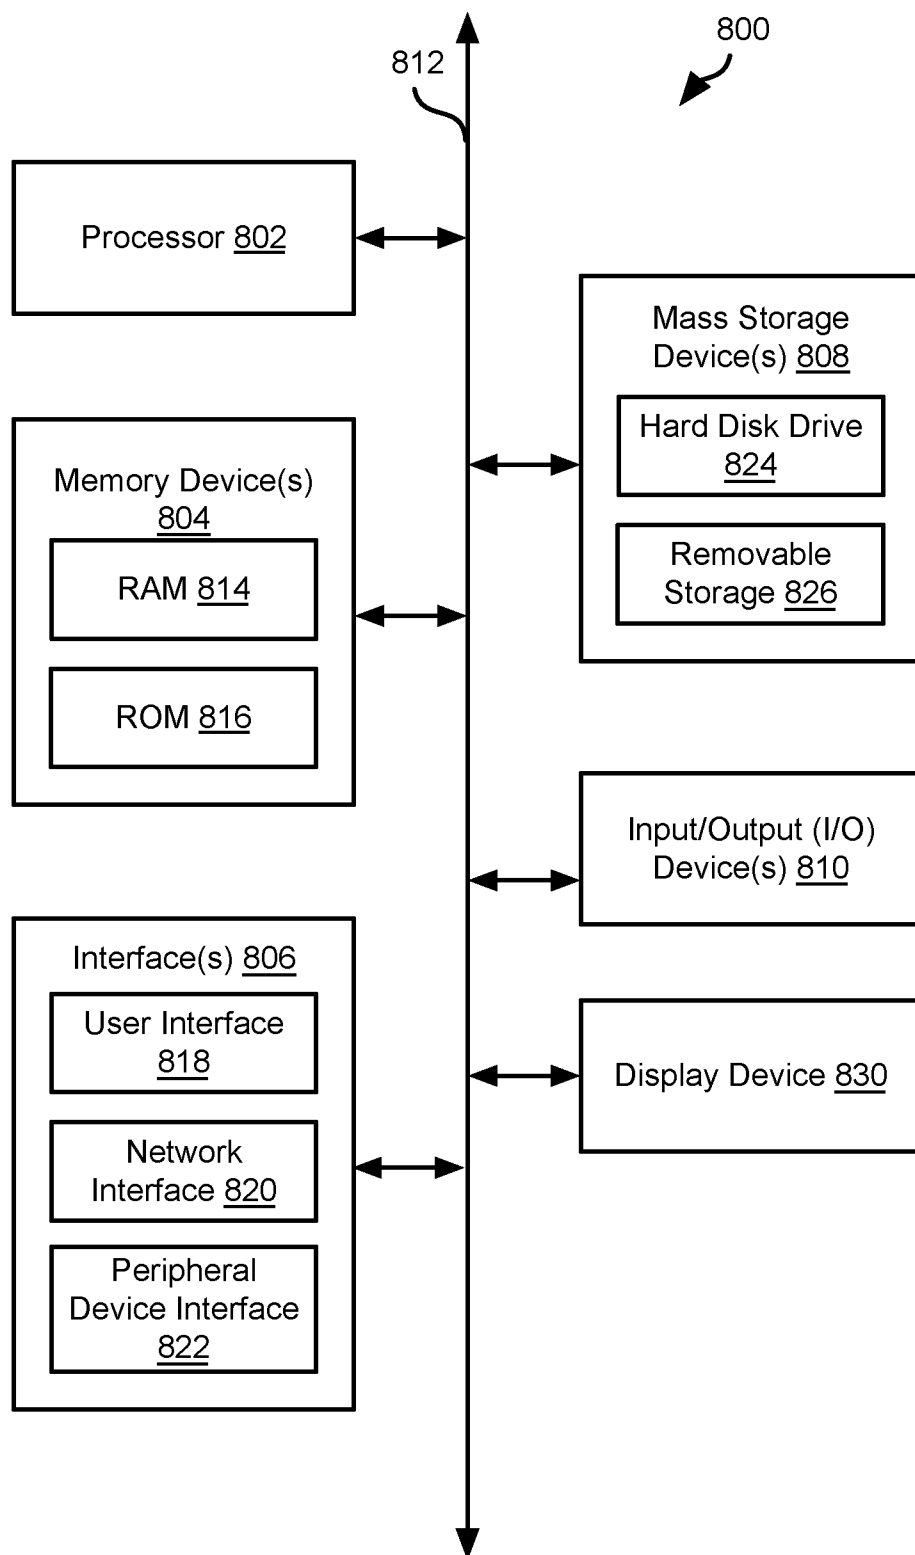


Fig. 8

1

DECEIVING ATTACKERS IN ENDPOINT SYSTEMS

BACKGROUND

Lateral movement is a technique used by attackers to move inside a network while looking for key targets with valuable data. An attacker typically gets foothold on a production asset and starts using that asset to move laterally in the network. Since an attacker typically has little information about the network the endpoint is in, attack attempts are made on multiple targets before finding a target of interest. The systems and methods disclosed herein provide an improved approach for detecting and preventing lateral movement from endpoint systems.

BRIEF DESCRIPTION OF THE FIGURES

In order that the advantages of the invention will be readily understood, a more particular description of the invention briefly described above will be rendered by reference to specific embodiments illustrated in the appended drawings. Understanding that these drawings depict only typical embodiments of the invention and are not therefore to be considered limiting of its scope, the invention will be described and explained with additional specificity and detail through use of the accompanying drawings, in which:

FIG. 1 is a schematic block diagram of a network environment for performing methods in accordance with an embodiment of the present invention;

FIG. 2 is a diagram illustrating a system for deflecting reconnaissance attempts in accordance with an embodiment of the present invention;

FIG. 3 is a process flow diagram of components on an endpoint for deflecting reconnaissance attempts in accordance with an embodiment of the present invention;

FIG. 4 is a process flow diagram of a method for identifying reconnaissance attempts in accordance with an embodiment of the present invention;

FIG. 5 is a process flow diagram of a method for deflecting inbound reconnaissance attempts in accordance with an embodiment of the present invention;

FIG. 6 is a process flow diagram of a method for deflecting outbound reconnaissance attempts in accordance with an embodiment of the present invention;

FIG. 7 is a process flow diagram of a method for processing deflected reconnaissance attempts using a decoy server in accordance with an embodiment of the present invention; and

FIG. 8 is a schematic block diagram of a computer system suitable for implementing methods in accordance with embodiments of the present invention.

DETAILED DESCRIPTION

It will be readily understood that the components of the invention, as generally described and illustrated in the Figures herein, could be arranged and designed in a wide variety of different configurations. Thus, the following more detailed description of the embodiments of the invention, as represented in the Figures, is not intended to limit the scope of the invention, as claimed, but is merely representative of certain examples of presently contemplated embodiments in accordance with the invention. The presently described embodiments will be best understood by reference to the drawings, wherein like parts are designated by like numerals throughout.

2

Embodiments in accordance with the invention may be embodied as an apparatus, method, or computer program product. Accordingly, the invention may take the form of an entirely hardware embodiment, an entirely software embodiment (including firmware, resident software, micro-code, etc.), or an embodiment combining software and hardware aspects that may all generally be referred to herein as a “module” or “system.” Furthermore, the invention may take the form of a computer program product embodied in any tangible medium of expression having computer-usable program code embodied in the medium.

Any combination of one or more computer-usable or computer-readable media may be utilized. For example, a computer-readable medium may include one or more of a portable computer diskette, a hard disk, a random access memory (RAM) device, a read-only memory (ROM) device, an erasable programmable read-only memory (EPROM or Flash memory) device, a portable compact disc read-only memory (CDROM), an optical storage device, and a magnetic storage device. In selected embodiments, a computer-readable medium may comprise any non-transitory medium that can contain, store, communicate, propagate, or transport the program for use by or in connection with the instruction execution system, apparatus, or device.

Computer program code for carrying out operations of the invention may be written in any combination of one or more programming languages, including an object-oriented programming language such as Java, Smalltalk, C++, or the like and conventional procedural programming languages, such as the “C” programming language or similar programming languages, and may also use descriptive or markup languages such as HTML, XML, JSON, and the like. The program code may execute entirely on a computer system as a stand-alone software package, on a stand-alone hardware unit, partly on a remote computer spaced some distance from the computer, or entirely on a remote computer or server. In the latter scenario, the remote computer may be connected to the computer through any type of network, including a local area network (LAN) or a wide area network (WAN), or the connection may be made to an external computer (for example, through the Internet using an Internet Service Provider).

The invention is described below with reference to flowchart illustrations and/or block diagrams of methods, apparatus (systems) and computer program products according to embodiments of the invention. It will be understood that each block of the flowchart illustrations and/or block diagrams, and combinations of blocks in the flowchart illustrations and/or block diagrams, can be implemented by computer program instructions or code. These computer program instructions may be provided to a processor of a general purpose computer, special purpose computer, or other programmable data processing apparatus to produce a machine, such that the instructions, which execute via the processor of the computer or other programmable data processing apparatus, create means for implementing the functions/acts specified in the flowchart and/or block diagram block or blocks.

These computer program instructions may also be stored in a non-transitory computer-readable medium that can direct a computer or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable medium produce an article of manufacture including instruction means which implement the function/act specified in the flowchart and/or block diagram block or blocks.

The computer program instructions may also be loaded onto a computer or other programmable data processing apparatus to cause a series of operational steps to be performed on the computer or other programmable apparatus to produce a computer implemented process such that the instructions which execute on the computer or other programmable apparatus provide processes for implementing the functions/acts specified in the flowchart and/or block diagram block or blocks.

Referring to FIG. 1, the methods disclosed herein may be practiced in a network environment **100** including a plurality of domains **102a-102c**. The domains **102a-102c** may be any network division, such as a subnet, local area network (LAN), virtual local area network (VLAN), or the like. The domains **102a-102c** may be distributed within a same building or over a large geographic area with interconnecting links including the Internet **104**. The illustrated domains **102a-102c** may represent one or more network components, such as routers, switches, servers, and the like that implement routing of traffic within the domains **102a-102c** and control traffic flowing into and out of the domains **102a-102c**.

Each domain may include one or more endpoints **106a-106f**. The endpoints **106a-106f** are production computing devices that operate as personal computers for users or servers providing production services to other endpoints or to external computers accessing the network environment by way of the internet **104**. The endpoints **106a-106f** may be desktop or laptop computers, mobile phones, tablet computers, server computers, and any other type of computing device. Some endpoints **106a-106f** may include internet-enabled devices, i.e. so-called internet of things (IoT) devices that are often a vulnerability.

The endpoints **106a-106f** are not dedicated honeypots, but rather perform non-decoy functions and process legitimate production data and legitimate production tasks of an enterprise, such as functioning as user computers executing applications such as word processors, browsers, graphics programs etc. The endpoints **106a-106f** may also function as web servers, database servers, remote login servers, application servers, and the like.

Some or all of the endpoints **106a-106f** may host a deflection service **108** that detects suspected reconnaissance by suspicious processes executing on the endpoint **106a-106f**/hosting the deflection service **108** or suspected reconnaissance connections from another endpoint **106a-106f** or an attacker system **110** connecting to the endpoint **106a-106f** by way of the internet **104**.

A BotSink **112** may be connected to one or more of the domains **102a-102c** directly or by way of the Internet **104**. The BotSink **112** may function as a decoy server, e.g., honey pot, programmed to engage an attacker while preventing access to production data or computer systems. For example, the BotSink **112** may execute one or more virtual machines implementing network services that engage and monitor malicious code while preventing access to other endpoints **106a-106f** of the network. The BotSink **112** may implement any of the method methods for detecting and engaging malicious code disclosed in the following applications (herein after “the incorporated applications”), which are hereby incorporated herein by reference in their entirety:

U.S. application Ser. No. 14/458,026, filed Aug. 12, 2014, and entitled DISTRIBUTED SYSTEM FOR BOT DETECTION;

U.S. application Ser. No. 14/466,646, filed Aug. 22, 2014, and entitled EVALUATING URLS FOR MALICIOUS CONTENT;

U.S. application Ser. No. 14/549,112, filed Nov. 20, 2014, and entitled METHOD FOR DIRECTING MALICIOUS ACTIVITY TO A MONITORING SYSTEM;

U.S. application Ser. No. 15/157,082, filed May 17, 2016, and entitled EMULATING SUCCESSFUL SHELLCODE ATTACKS;

U.S. application Ser. No. 14/805,202, filed Jul. 21, 2015, and entitled MONITORING ACCESS OF NETWORK DARKSPACE;

U.S. application Ser. No. 14/965,574, filed Dec. 10, 2015, and entitled DATABASE DECEPTION IN DIRECTORY SERVICES;

U.S. application Ser. No. 15/142,860, filed Apr. 29, 2016, and entitled AUTHENTICATION INCIDENT DETECTION AND MANAGEMENT;

U.S. application Ser. No. 15/153,471, filed May 12, 2016, and entitled LURING ATTACKERS TOWARDS DECEPTION SERVERS;

U.S. application Ser. No. 15/204,779, filed Jul. 7, 2016, and entitled DETECTING MAN-IN-THE-MIDDLE ATTACKS; and

U.S. application Ser. No. 15/360,117, filed Nov. 23, 2016, and entitled IMPLEMENTING DECOYS IN NETWORK ENDPOINTS.

Referring to FIG. 2, an endpoint **106** (e.g., any one of the endpoints **106a-106f**) may execute a deflection service **108**. The deflection service **108** detects reconnaissance attempts including inbound connection attempts from an external attacker system **110** or from another endpoint that is executing malicious code. The deflection service **108** further detects outbound reconnaissance attempts by a suspicious process **200** executing on the endpoint **106** itself. Both inbound and outbound connection attempts that are deemed suspicious may be deflected to the BotSink **112** that functions as a decoy server. The manner in which the deflection service **108** detects reconnaissance connections and in which the BotSink **112** handles deflected connections is described in greater detail below.

FIG. 3 is a block diagram of the deflection service **108** executing on the endpoint **106**. In the following description “the endpoint **106**” refers to the endpoint executing the instance of the deflection service **108** discussed below and “other endpoint” refers to a different endpoint (that may be executing its own service **108**) that is attempting to connect to the endpoint **106**.

As is apparent, the deflection service **108** includes components in kernel space **300** and in user space **302** of the endpoint **106**. As known in the art, processes and applications launched by a user execute in a user space corresponding to the user account or context in which the process or application was launched. Accordingly, the process or application has access to a virtual address space corresponding to the user space but not to address space that are reserved for the operating system or the user spaces of other users. The operating system itself operates in kernel space and all processes that operation in kernel space have access to the entire virtual address space of the kernel. Operating system components executing in kernel space include device drivers, the network protocol stack, network interface controller, and other basic functions of the operating system.

The deflection service **108** includes a kernel component **304** that operates in the kernel space **300**. In particular, the kernel component may be interposed between the TCP/IP (TCP=transport control protocol, IP=internet protocol) stack **306** and the network interface controller (NIC) **308** of the operating system on the endpoint **106**. The kernel component **304** routes certain packets a capture module **310** of the

deflection service **108** that operates in user space. TCP handshake packets (TCP SYN, TCP RST, TCP SYN-ACK, but not the TCP ACK packet in some embodiments) for connections that have not previously been determined to be suspicious and therefore deflected to the BotSink **112** may be routed to the capture module **310**. For example, copies of TCP SYN and TCP SYN ACK packets may be sent to the capture module whereas the original packets are routed to their destination address without being routed to the capture module **310**. TCP RST packets are dropped and a copy is provided to the capture module **310**. If the copy of the TCP RST packet is not deflected according to the methods described herein, a copy of the TCP RST packet is injected back into the network stack **306** and routed to its destination address.

Packets of connections previously determined to be suspicious according to the methods disclosed herein are routed by the kernel component **304** to the capture module **310** regardless of whether the packets are TCP handshake packets. For example, the kernel component **304** may modify a flow cache that is part of the kernel component **304** or stored elsewhere in kernel space **300**. Entries in the flow cache include identifying information for a connection, such as “five tuple” information of packets to be deflected, the five tuple information being the source address, destination address, source port, destination port, and protocol of packets of the connection. Packets having five tuple information matching an entry in the flow cache will then be deflected by the kernel component **304** to the capture module **310** without waiting for a decision from user space **302** indicating that the connection is to be deflected.

In contrast, in some embodiments, TCP RST packets that do not match an entry in the flow cache may be dropped by the kernel component **304** and not transmitted. Each dropped TCP RST packet is provided to the capture module **310** in user space **302** and evaluated as described herein. When the decision in user space **302** indicates that the packet may be transmitted to its destination address, which may be an external address or a process listening to a destination port referenced by the packet, a copy of the packet is injected back into the stack **306** and transmitted. Otherwise, the packet is deflected and no copy is injected back into the stack **306**. In some embodiments, all TCP handshake packets are forwarded to the flow manager **312** for evaluation regardless of whether a matching entry is found in the flow cache.

Intercepted packets may be sent to a flow manager **312** in user space for processing. Intercepted packets for connections already deemed suspicious are identified using a flow table **314**. In particular, the flow table **314** may list five-tuple information for connections deemed suspicious: source address, destination address, source port, destination port, and protocol. Additional information included in the flow table **314** for a connection may include the MAC (machine access code) of the external device from which the packets were received. This MAC address may then be inserted into packets in user space **302** when packets are sent back to the attacker through the stack **306** according to the methods disclosed herein (e.g., packets from the BotSink **112**).

Packets with five tuple information matching an entry in the flow table **314** may be provided to a deflector **316** that forwards these packets to the BotSink **112**. Deflected packets may be sent by way of an encrypted tunnel to the BotSink **112**. For example, a tunnel handler **318** encrypts the deflected packets and addresses them to the BotSink **112**, such as by way of a UDP (user datagram protocol) connection, TCP connection, or an encrypted tunnel implemented

over some other type of protocol. The encrypted packets may be inserted into the TCP/IP stack **306** and transmitted to the BotSink **112** by the NIC **308**. The tunnel handler **318** likewise decrypts packets received from the BotSink **112** and returns the decrypted packets to the deflector **316**. The deflector **316** returns the packets to the flow manager **312**, which injects the decrypted packets into the stack **306** and the NIC **308** transmits the packets to the external address or local port addressed by the packets. In some embodiments a non-encrypted tunnel is used.

TCP/IP handshake packets that do not match an entry in the flow table **314** may be provided to a reconnaissance detector **320** that evaluates whether the handshake packets likely correspond to a reconnaissance attempt by an attacker system, malicious module on another endpoint, or a malicious process on the endpoint **106**. An example approach for determining whether handshake packets reconnaissance attempts is described below with respect to FIGS. **4** through **6**.

In some embodiments, the user space components of the deflection service **108** further include a whitelist **322** that identifies (by five tuple, process ID, port number, or other identification means) processes and computer system addresses that are not malicious and should not be deflected even if they meet criteria evaluated by the reconnaissance detector **320**. For example, a system administrator may invoke execution of a whitelisted scanner that could result in failed connection attempts that would otherwise be deemed suspicious and deflected.

The deflection service **108** may further include a configuration manager **324**. The configuration manager **324** may receive configuration parameters from the BotSink **112** or other administrative computer system by way of a communication agent **326**. For example, the BotSink **112** may execute an endpoint manager that communicates with the endpoints **106a-106g** of a network, provides them with configuration information, and monitors their statuses. In some embodiments, configuration parameters received by the configuration manager **324** will tell the tunnel handler **318** which port it should connect to on the BotSink **112**. In other implementations, the BotSink **112** may listen on any port to receive packets from the tunnel handler **318**. The BotSink **112** may also communicate with the endpoint using an IP-in-IP tunnel or a GRE (generic routing encapsulation) tunnel.

The configuration information may include encryption keys used by the tunnel handler **318** to encrypt and decrypt data, parameters used by the reconnaissance detector **320** to identify suspicious connections, entries in the whitelist **322**, or other parameters. The communication agent **326** may be configured with the address (e.g., IP address) of the BotSink **112** such that on startup of the deflection service **108** on the endpoint, the communication agent **326** may connect to the BotSink **112** to retrieve the configuration parameters.

FIG. **4** illustrates a method **400** that may be executed by the user space components of the deflection service **108**. The method **400** may include receiving **402** a TCP handshake packet (TCP SYN, TCP SYN-ACK, and TCP RST, but not TCP ACK packets in some embodiments), such as a TCP handshake packet received by the flow manager **312** from the kernel component **304** by way of the capture module **310** or by some other path. TCP SYN is a first packet in the handshake process and indicates an intent to connect to a port indicated in the TCP SYN packet, TCP SYN-ACK is a packet sent in response to the SYN packet indicating that the TCP SYN packet was received and connection to the port

specified is accepted, and TCP ACK is a packet sent in response the TCP SYN packet indicating acknowledgment of receipt.

The TCP RST or “reset” packet is sent if no process is listening on the port referenced in the TCP SYN packet. The TCP RST packet could be received from an external system in response to a connection attempt from a process executing on the endpoint 106. The TCP RST could be generated by the NIC 308 or other kernel process in response to detecting an inbound connection attempt that references a port on which no process is listening.

If the TCP handshake packet is found 404 not to be a TCP RST packet, the method 400 ends with respect to the packet received at step 402. If the TCP handshake packet is a TCP RST packet but is found 406 to match an entry in the whitelist 406, then the method 400 also ends with respect to the packet received at step 402.

The method 400 may include evaluating 408 whether the packet from step 402 is for a failed inbound connection attempt (e.g., the source address is that of the endpoint 106 and the destination address that is not that of the endpoint 106) or for a failed outbound connection attempt (e.g., the source address is that of the endpoint 106). If the packet is found 408 to be for an inbound connection, then processing may continue according to the method of FIG. 5. If the packet is found 408 to be for an outbound connection, then processing may continue according to the method of FIG. 6.

FIG. 5 illustrates a method 500 for processing a TCP RST packet generated by the endpoint 106 in response to a failed inbound connection attempt. The method 500 may be executed by the flow manager 312 or other component of the deflection service 108. The method 500 may include determining 502 the destination address 502 in the TCP RST packet. Step 502 may further include determining 502 a destination port of the TCP RST packet.

The method 500 may include evaluating 504 whether the destination address qualifies for deflection. In some embodiments, qualification means that there are at least N failed connection attempts from the same destination address, where N is a predefined threshold. In some embodiments, N failed connection attempts to N different port numbers are required before the destination address is deemed qualified for deflection. A failed connection attempt may be deemed to have occurred in response to receiving a TCP SYN packet from the destination address followed by a TCP RST from the protocol stack of the endpoint addressed to the same destination address.

The value of N may be set by the configuration parameters received by the configuration manager 324 from the BotSink 112. For example, a value between one and five, preferably two or three, may be effective to avoid false positives and detect reconnaissance attempts. If the destination address of the TCP RST packet is not found to be qualified, then a counter for the destination address (or for the combination of the destination address and the destination port) may be incremented 506. If the TCP RST packet is the first TCP RST packet including the destination address identified at an iteration of step 502, then a counter may be initiated for the destination address, otherwise an existing counter is incremented 506. When the counter for the destination address is found 504 to be equal to N, the destination address may be found 504 to be qualified to be deflected. In some embodiments, the N failed connection attempts must occur within a predefined time interval before a connection is found to be qualified for deflection. Accordingly, a time of occurrence of each failed connection attempt may be recorded and N may

be decremented when the elapsed time from the time of a failed connection attempt is greater than the time interval.

If the destination address is found 504 to be qualified, some or all of the remaining steps of the method 500 may be executed in response. In particular, the method 500 may include generating 508 a TCP SYN packet. The TCP SYN packet may be formatted as a TCP SYN packet according to TCP protocol and have the five tuple information corresponding to the TCP RST packet evaluated at step 502, i.e. a source address set to the destination address in the TCP RST packet, destination address set to the source address of the TCP RST packet (i.e., and address of the NIC or other process that generated the TCP RST packet), source port set to the destination port of the TCP RST packet, destination port set to the source port of the TCP RST packet, and protocol that is the same as in the TCP RST packet.

The method 500 may further include setting 510 the ISN (initial sequence number) of the TCP SYN packet of step 508 to be the acknowledgment number of the TCP RST packet evaluated at step 502 decremented by 1.

The method 500 may further include creating 512 entries in the flow table 314 and the flow cache of the kernel component 304. In particular, an entry in the flow table 314 may be modified to include an entry that includes at least the destination address. Accordingly, all packets received by the flow manager 312 from the destination address will be deflected to the BotSink 112. In some embodiments, the entry will further list a port at the destination address and a port on the endpoint 106 referenced in the TCP RST packet such that only packets from the port at the destination and addressed to the port on the endpoint 106 will be deflected in response to existence of the entry.

Creating 512 the flow cache entry may include creating an entry in the flow cache that routes all packets from the destination address from step 502 (or all packets from the destination address and destination port from step 502) will be intercepted by the kernel component 304 and transmitted to the flow manager 312, such as by way of the capture module 310.

The method 500 may further include initiating 514 a TCP state machine in user space. The TCP state machine may be initiated to a state as defined in the TCP protocol at a point in connection following transmission of the TCP SYN packet. The state machine may be further updated as defined in the TCP protocol for subsequent packets, e.g., a TCP SYN-ACK received from the BotSink 112, and a TCP ACK from the destination address. In particular, the state machine may be updated according to RFC 793 in response to packets exchanged between the BotSink and the destination address. When the state machine indicates that the connection is terminated, references to the connection in the flow table 314 may be deleted to free space for monitoring subsequent connections.

The method 500 may further include transmitting 516 the TCP SYN packet as constituted after steps 508 and 510 to the BotSink 112, such as over an encrypted tunnel, such as the encrypted tunnel managed by the tunnel handler 318.

The method 500 may further include receiving 518 a TCP SYN-ACK packet from the BotSink 112 in response to the TCP SYN packet of step 516. This packet may be received over the encrypted tunnel and decrypted. The TCP state machine from step 514 may be updated 520 in response to receipt of the TCP SYN packet.

The method 500 may further include injecting 522 the TCP SYN-ACK packet from step 518 into the network stack 306 such that the NIC 308 will transmit the TCP SYN-ACK packet to the destination address. The TCP SYN-ACK

packet may be modified before transmission such that the source address references the address of the endpoint **106** rather than the address of the BotSink **112**. In particular, the packet may be modified to include the MAC address of the device (NIC or other component) of the endpoint that transmitted the TCP RST packet detected at step **402**.

Following step **522**, communication between the system at the destination address and the BotSink **112** may continue by way of the endpoint **106**. Specifically, packets from the BotSink **112** over the encrypted tunnel and addressed to the destination address are routed by flow manager **312** to the TCP/IP stack **306** to be sent to the destination address as defined in the flow table **314** having a source address changed to that of the endpoint **106**. Packets from the destination address are intercepted according to the flow cache and sent to the flow manager **312**. These packets are encrypted and sent to the BotSink **112** according to the flow table entry **314** referencing the destination address. The manner in which the BotSink **112** engages and monitors the system at the destination address may be according to any of the approaches described in the incorporated applications. FIG. 7 further describes processing that may be performed with respect to packets deflected to the BotSink **112**.

FIG. 6 illustrates a method **600** for processing a TCP RST packet generated by a computer system other than the endpoint **106** ("the destination system") in response to a failed outbound connection attempt from a process executing on the endpoint **106**. The method **600** may be executed by the flow manager **312** or other component of the deflection service **108**. The method **600** may include obtaining **602** the five tuple information from the TCP RST packet from step **402** of the method **400** that invoked execution of the method **600**. The method **600** may further include using the five tuple information to identify **604** the process that is addressed by the TCP RST packet. For example, the five tuple will include a destination port. The flow manager **312** may therefore evaluate which process ID is connected to the destination port and listening on the destination port.

The method **600** may include evaluating **606** whether the process ID of step **604** qualifies for deflection. In some embodiments, qualification means that the TCP RST was preceded by N other failed connection by the same process ID (i.e. N instances of an outbound SYN packet and corresponding received TCP RST packet for a connection (e.g., five tuple) mapped to the process ID in a TCP connection table), where N is a predefined threshold. In some embodiments, N failed connection attempts to N different ports of a destination address (source ports of TCP RST packets) are required for a connection attempt to be qualified for deflection. In some embodiments, the N failed connection attempts must occur within a predefined time interval before a connection is found to be qualified for deflection. Accordingly, a time of occurrence of each failed connection attempt may be recorded and N may be decremented when the elapsed time from the time of a failed connection attempt is greater than the time interval.

Note that if there is an outbound reconnaissance connection attempt (TCP SYN) to a destination IP address that is not assigned, there will be no TCP RST packet. A number of failed connection attempts by a process ID may therefore also be counted in response to detecting a SYN packet generated by the process ID (as mapped to the process ID in the connection table) that is not followed by a TCP RST or TCP SYN ACK within a threshold time period (e.g., 10 seconds to one minute, preferably between 25 and 35 seconds). In some embodiments, retransmissions are counted as failed connection attempt for a process ID.

Retransmissions may be counted in response to a second TCP SYN packet being sent within a threshold time period of a previously sent first TCP SYN matching the five tuple of the second TCP SYN packet.

The value of N may be set by the configuration parameters received by the configuration manager **324** from the BotSink **112**. For example, a value between one and five, preferably two or three, may be effective to avoid false positives and detect reconnaissance attempts. If the process ID of step **604** is not found **606** to be qualified, then a counter for the process ID may be incremented **608**. If the TCP RST packet is the first TCP RST packet mapped to the process ID at an iteration of step **604**, then a counter may be initiated for the process ID, otherwise an existing counter is incremented **608**. When the counter for the process ID is found **606** to be equal to N, the process ID may be found **606** to be qualified to be deflected.

If the process ID is found **608** to be qualified, some or all of the remaining steps of the method **600** may be executed in response. In particular, the method **600** may include generating **610** a TCP SYN packet. The TCP SYN packet may be formatted with as a TCP SYN packet according to TCP protocol and have the five tuple information corresponding to the TCP RST packet evaluated at step **602**, i.e. a source address set to the destination address of the TCP RST packet (e.g., a NIC or some other component of the endpoint), source address, destination address set to the source address of the TCP RST packet, source port set to the destination port from the TCP RST packet, destination port set to the source port from the TCP RST packet, and protocol being the same as in the TCP RST packet. Where a reconnaissance attempt is detected in response to retransmissions due to failed connections, the TCP SYN packet may be the TCP SYN packet (e.g., the TCP SYN for a last retransmission) as received from the process that generated it, rather than being synthesized based on a TCP RST packet.

The method **600** may further include setting **612** the ISN (initial sequence number) of the TCP SYN packet of step **610** to be the acknowledgment number of the TCP RST packet evaluated at step **602** decremented by one. Where the TCP SYN is from a retransmission, this step may be omitted.

The method **600** may further include creating **614** entries in the flow table **314** and the flow cache of the kernel component **304**. In particular, an entry in the flow table **314** may be modified to include an entry that includes at least the source address of the TCP RST packet (or the destination address of the TCP SYN packet of a retransmission deemed to be a reconnaissance attempt as described above). Accordingly, all packets received by the flow manager **312** having the source address of the TCP RST packet (or destination address of the TCP SYN packet from the retransmission) as the destination address will be deflected to the BotSink **112**. In some embodiments, the entry will further list a port at the source address and a port on the endpoint **106** referenced in the TCP RST packet (or referenced in the TCP SYN packet from the retransmission) such that only packets from the port on the endpoint **106** and addressed to the port at the source address will be deflected in response to existence of the entry.

Creating **614** the flow cache entry may include creating an entry in the flow cache that routes all packets addressed to the source address from step **602** (or all packets addressed to the source address and source port from step **602**) will be intercepted by the kernel component **304** and transmitted to the flow manager **312**, such as by way of the capture module **310**.

11

The method 600 may further include initiating 616 a TCP state machine in user space. The TCP state machine may be initiated to a state as defined in the TCP protocol at a point in connection following transmission of the TCP SYN packet. The state machine may be further updated as defined in the TCP protocol for subsequent packets, e.g., a TCP SYN-ACK received from the BotSink 112, and a TCP ACK from the destination address. As noted above, this may enable the flow manager to delete references in the flow table 314 for connections that have ended as indicated by the state machine.

The method 600 may further include transmitting 618 the TCP SYN packet as constituted after steps 610 and 612 to the BotSink 112, such as over an encrypted tunnel, such as the encrypted tunnel managed by the tunnel handler 318.

The method 600 may further include receiving 620 a TCP SYN-ACK packet from the BotSink 112 in response to the TCP SYN packet of step 516. This packet may be received over the encrypted tunnel and decrypted. The TCP state machine from step 514 may be updated 622 in response to receipt of the TCP SYN packet.

The method 600 may further include injecting 624 the TCP SYN-ACK packet from step 620 into the network stack 306 such that the NIC 308 will transmit the TCP SYN-ACK packet to its destination: the port to which the process ID identified at step 604 is connected. The TCP SYN-ACK packet may be modified before transmission such that the source address is the source address from the TCP RST packet rather than the address of the BotSink 112. This may include adding the MAC address of the external device referenced in the TCP RST packet received at step 404.

Following step 522, communication between the process having the process ID from step 604 and the BotSink 112 may continue by way of the endpoint 106. Specifically, packets from the BotSink 112 over the encrypted tunnel and addressed to the destination port of the process ID identified at step 604 are decrypted routed by flow manager 312 to the TCP/IP stack 306 to be sent to the port to which the process ID is connected as defined the flow table 314. Packets from the process ID (e.g., received at the port to which the process ID is connected) are intercepted according to the flow cache and sent to the flow manager 312. These packets are encrypted and sent to the BotSink 112 according to the flow table 314 entry referencing the process ID (or port to which the process ID is connected). The manner in which the BotSink 112 engages and monitors the process may be according to any of the approaches described in the incorporated applications. FIG. 7 further describes processing that may be performed with respect to packets deflected to the BotSink 112.

FIG. 7 illustrates a method 700 that may be executed by the BotSink 112 in response to receiving a TCP SYN packet transmitted by an endpoint 106 ("the subject endpoint") at steps 522 or 624. The method 700 may include determining 702 an operating system (MAC OSX, WINDOW, LINUX, etc.) executing on the subject endpoint. Determining 702 the operating system may be performed by evaluating information included in the TCP SYN packet, such as by requesting an identifier of the operating system from the configuration manager 324, which returns the identifier of the operating system to the BotSink 112. The operating system may include the type (MAC OSX, WINDOW, LINUX, etc.) as well as a version number.

The method 700 may further include determining 704 the port number from the TCP SYN packet. In particular, the destination port of the TCP SYN packet may be obtained and evaluated to determine 706 a service typically associated

12

with that port number. As known in the art, certain services typically listen to a specific port number on computers on which the services are executing, such as those listed in Table 1, below.

TABLE 1

Service and Port Number Mappings	
Service	Port Number
FTP (file transfer protocol)	20, 21
SSH (secure shell)	22
Telnet	23
SMTP (simple mail transfer protocol)	25
DNS (domain name service)	53
TFTP (trivial file transfer protocol)	69
DHCP (dynamic host configuration protocol)	67, 68
HTTP (hypertext transfer protocol)	80
POP3 (a mail transfer protocol)	110
NNTP (network news transfer protocol)	119
NTP (network time protocol)	123
IMAP4 (internet message access protocol 4)	143
LDAP (lightweight directory access protocol)	389
HTTP (hypertext transfer protocol secure)	443
IMAPS (IMAP over SSL)	993
RADIUS (remote authentication dial-in user service)	1812

The method 700 may further include identifying a virtual machine (VM) executing on the BotSink 112 that is executing the operating system identified at step 702 and the service identified at step 706. If a VM executing the determined operating system is not executing, one may be instantiated. Note that there are many versions of each operating system, accordingly the operating system instantiated may be a different version number from the OS determined at step 702, e.g. the available operating system that is closest to the version number determined at step 702. Likewise, if the service determined at step 706 is not executing on a VM executing the operating system determined at step 702, then an instance of the service may be started on a VM executing the operating system determined at step 702.

The method 700 may further include creating 710 a dynamic network address translation (DNAT) rule that maps the address of the subject endpoint and the port number from step 704 to the VM and service (e.g., port at which the service is listening) from step 708. Subsequent traffic to and from the VM and service from step 708 may then be routed 712 according to the routing rule: traffic from the subject endpoint and addressed to the port number from step 704 will be routed to the service (e.g. port number) and VM from step 708. Packets from the VM and service from step 708 referencing the address of the subject endpoint (in the case of an outbound connection from a suspect process) will be sent to the subject endpoint according to the DNAT. Packets from the service and VM from step 708 that is addressed to the destination address of an external system referenced by a suspected inbound reconnaissance attack will also be routed to the subject endpoint according to the DNAT rule.

FIG. 8 is a block diagram illustrating an example computing device 800 which can be used to implement the system and methods disclosed herein. The endpoints 106a-106f, BotSink 112, and attacker system 110 may also have some or all of the attributes of the computing device 800. In some embodiments, a cluster of computing devices interconnected by a network may be used to implement any one or more components of the invention.

Computing device 800 may be used to perform various procedures, such as those discussed herein. Computing

13

device **800** can function as a server, a client, or any other computing entity. Computing device can perform various monitoring functions as discussed herein, and can execute one or more application programs, such as the application programs described herein. Computing device **800** can be

any of a wide variety of computing devices, such as a desktop computer, a notebook computer, a server computer, a handheld computer, tablet computer and the like. Computing device **800** includes one or more processor(s) **802**, one or more memory device(s) **804**, one or more interface(s) **806**, one or more mass storage device(s) **808**, one or more Input/Output (I/O) device(s) **810**, and a display device **830** all of which are coupled to a bus **812**. Processor(s) **802** include one or more processors or controllers that execute instructions stored in memory device(s) **804** and/or mass storage device(s) **808**. Processor(s) **802** may also include various types of computer-readable media, such as cache memory.

Memory device(s) **804** include various computer-readable media, such as volatile memory (e.g., random access memory (RAM) **814**) and/or nonvolatile memory (e.g., read-only memory (ROM) **816**). Memory device(s) **804** may also include rewritable ROM, such as Flash memory.

Mass storage device(s) **808** include various computer readable media, such as magnetic tapes, magnetic disks, optical disks, solid-state memory (e.g., Flash memory), and so forth. As shown in FIG. 8, a particular mass storage device is a hard disk drive **824**. Various drives may also be included in mass storage device(s) **808** to enable reading from and/or writing to the various computer readable media. Mass storage device(s) **808** include removable media **826** and/or non-removable media.

I/O device(s) **810** include various devices that allow data and/or other information to be input to or retrieved from computing device **800**. Example I/O device(s) **810** include cursor control devices, keyboards, keypads, microphones, monitors or other display devices, speakers, printers, network interface cards, modems, lenses, CCDs or other image capture devices, and the like.

Display device **830** includes any type of device capable of displaying information to one or more users of computing device **800**. Examples of display device **830** include a monitor, display terminal, video projection device, and the like.

Interface(s) **806** include various interfaces that allow computing device **800** to interact with other systems, devices, or computing environments. Example interface(s) **806** include any number of different network interfaces **820**, such as interfaces to local area networks (LANs), wide area networks (WANs), wireless networks, and the Internet. Other interface(s) include user interface **818** and peripheral device interface **822**. The interface(s) **806** may also include one or more user interface elements **818**. The interface(s) **806** may also include one or more peripheral interfaces such as interfaces for printers, pointing devices (mice, track pad, etc.), keyboards, and the like.

Bus **812** allows processor(s) **802**, memory device(s) **804**, interface(s) **806**, mass storage device(s) **808**, and I/O device(s) **810** to communicate with one another, as well as other devices or components coupled to bus **812**. Bus **812** represents one or more of several types of bus structures, such as a system bus, PCI bus, IEEE 1394 bus, USB bus, and so forth.

For purposes of illustration, programs and other executable program components are shown herein as discrete blocks, although it is understood that such programs and components may reside at various times in different storage

14

components of computing device **800**, and are executed by processor(s) **802**. Alternatively, the systems and procedures described herein can be implemented in hardware, or a combination of hardware, software, and/or firmware. For example, one or more application specific integrated circuits (ASICs) can be programmed to carry out one or more of the systems and procedures described herein.

The invention claimed is:

1. A method comprising:

(a) receiving, by an endpoint computer system, a transport control protocol (TCP) reset (RST) packet from a source, the TCP RST packet being formatted according to TCP protocol; and

in response to (a):

(b) generating a TCP sync (SYN) packet including data from the TCP RST packet; and

(c) transmitting over a tunnel the TCP SYN packet to a decoy server that is different from a second computer system referenced by a destination address in the TCP RST packet;

wherein the source is an interface of the endpoint computer system;

wherein the data from the TCP RST packet included in the TCP SYN packet includes the destination address from the TCP RST packet as the source address of the TCP SYN packet, the source address from the TCP RST packet referencing the second computer system that is different from the endpoint computer system as the destination address of the TCP SYN packet.

2. The method of claim 1, wherein the data from the TCP RST packet included in the TCP SYN packet includes an initial sequence number (ISN) field of the TCP SYN packet equal to an acknowledgment number of the TCP RST packet decremented by 1.

3. The method of claim 1, further comprising:

receiving, by the endpoint computer system, a TCP SYN acknowledge (TCP SYN-ACK) packet from the decoy server; and

transmitting, by the endpoint computer system, at least a portion of the TCP SYN-ACK packet to the second computer system.

4. The method of claim 3, further comprising:

receiving, by the endpoint computer system, a TCP acknowledge (TCP ACK) packet from the second computer system in response to the at least the portion of the TCP SYN-ACK packet; and

transmitting, by the endpoint computer system over the tunnel, at least a portion of the TCP ACK packet to the decoy server.

5. The method of claim 1, further comprising:

implementing, on the decoy server, a service corresponding to a destination port number included in the TCP RST packet;

establishing, by the decoy server, a TCP connection to a second computer system at a destination address of the TCP RST packet through the endpoint computer system; and

providing, by the decoy server, the service to the second computer system over the TCP connection through the endpoint computer system.

6. The method of claim 5, further comprising:

instantiating a virtual machine (VM) executing an operating system corresponding to a type of operating system executing on the endpoint computer system, the service executing within the VM.

7. The method of claim 6, wherein the VM is a first VM of a plurality of VMs, the method further comprising:

15

defining, by the decoy server, a dynamic network address translation (DNAT) mapping the TCP connection to the first VM; and
 routing traffic over the TCP connection to and from the first VM according to the DNAT mapping. 5

8. The method of claim 1, further comprising:
 counting, by the endpoint computer system, a number of SYN packets sent by the second computer system, each SYN packet being sent to a different port number, and that are followed by corresponding TCP RST packets 10
 received from the source; and
 performing (b) and (c) for the TCP RST packet only when the number meets a threshold condition.

9. The method of claim 1, wherein the tunnel is an encrypted tunnel connecting the endpoint computer system 15 to the decoy server.

10. A method comprising:
 (a) receiving, by an endpoint computer system, a transport control protocol (TCP) reset (RST) packet from a source, the TCP RST packet being formatted according to TCP protocol; 20
 in response to (a):
 (b) generating a TCP sync (SYN) packet including data from the TCP RST packet; and
 (c) transmitting over a tunnel the TCP SYN packet to a decoy server that is different from a second computer system referenced by a destination address in the TCP RST packet; 25
 providing a kernel component executing in kernel space of the endpoint computer system;
 intercepting, by the kernel component, an original TCP RST packet;
 dropping, by the kernel component, the original TCP RST packet, 30
 providing, by the kernel component, a copy of the original TCP RST packet as the TCP RST packet to a user space component executing in a user space on the endpoint computer system; and
 performing (a), (b), and (c) by the user space component.

11. The method of claim 10, further comprising: 40
 providing, by the kernel component, all TCP handshake packets to the user space component;
 evaluating, by the user space component, the TCP handshake packets;
 (d) determining, by the user space component, that first TCP handshake packets of the TCP handshake packets including the TCP RST packet indicate a reconnaissance attempt; 45
 in response to (d), configuring, by the user space component, the kernel component to route packets corresponding to the first TCP handshake packets to the user space component; 50
 (e) determining, by the user space component, that second TCP handshake packets of the TCP handshake packets including the TCP RST packet are not suspicious; and 55
 in response to (e), refraining from configuring, by the user space component, the kernel component to route packets corresponding to the second TCP handshake packets to the user space component such that packets corresponding to the second TCP handshake packets are not provided to the user space component. 60

12. The method of claim 10, further comprising:
 receiving, by the user space component, a TCP sync (SYN) acknowledge (ACK) packet over the tunnel from the decoy server; 65
 providing the TCP SYN ACK packet to the kernel component; and

16

injecting, by the kernel component, the TCP SYN ACK packet into a network stack of the of the endpoint computer system.

13. A method comprising:

(a) receiving, by an endpoint computer system, a transport control protocol (TCP) reset (RST) packet from a source that is a second computer system different from the endpoint computer system, the TCP RST packet being formatted according to TCP protocol; and

in response to (a):

(b) generating a TCP sync (SYN) packet including data from the TCP RST packet;

(c) transmitting the TCP SYN packet over a tunnel to a decoy server that is different from the second computer system and the endpoint computer system,

wherein the data from the TCP RST packet included in the TCP SYN packet includes a destination port from the TCP RST packet as a source port in the TCP SYN packet; and

wherein the data from the TCP RST packet included in the TCP SYN packet includes an initial sequence number (ISN) field of the TCP SYN packet equal to an acknowledgment number of the TCP RST packet decremented by one.

14. The method of claim 13, further comprising:

receiving, by the endpoint computer system, a TCP SYN acknowledge (TCP SYN-ACK) packet from the decoy server; and

providing, by the endpoint computer system, at least a portion of the TCP SYN-ACK packet to a process executing on the endpoint computer system and associated with the destination port from the TCP RST packet.

15. The method of claim 14, further comprising:

receiving, by the endpoint computer system, a TCP acknowledge (TCP ACK) packet from the process; and
 forwarding, by the endpoint computer system, at least a portion of the TCP ACK packet to the decoy server.

16. The method of claim 13, further comprising:

establishing, by the decoy server a TCP connection to a process executing on the endpoint computer system, the process being connected to a destination port included in the TCP RST packet;

implementing, by the decoy server, a service corresponding to a source port in the TCP RST packet; and

engaging, by the decoy server, the process over the TCP connection using the service.

17. A method comprising:

detecting, by an endpoint computer system, multiple retransmissions from a process executing on the endpoint computer system and having a process ID, each retransmission having a TCP SYN packet including a source address and a destination address;

(a) determining that a number of the multiple retransmission for which the TCP SYN packets have identical source and destination addresses meets a threshold condition; and

in response to (a):

(b) transmitting the TCP SYN packet of one of the multiple retransmissions having the identical source and destination addresses (the retransmitted packet) over a tunnel to a decoy server that is different from the endpoint computer system;

(c) receiving a TCP SYN acknowledge (ACK) packet from the decoy server in response to the retransmitted packet;

17

- (d) providing the TCP SYN ACK packet to the process such that a TCP connection is established between the process and the decoy server; and
- (e) engaging the process by the decoy server over the connection.

5

* * * * *

18