




# Pizza Oven Cart

*Instruction Manual*




## WHAT'S INCLUDED

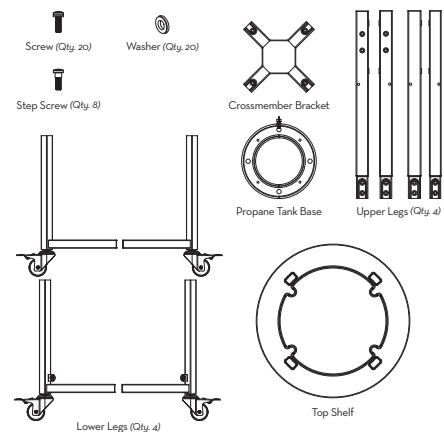


Remove all of the contents from the packaging and wrapping material.


## ASSEMBLY

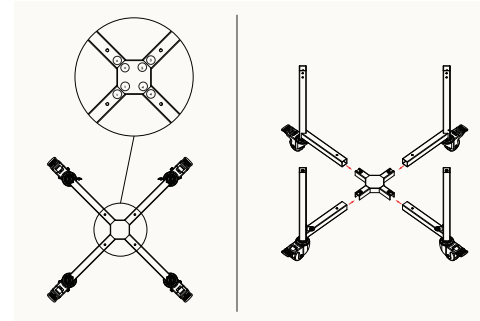

**Step 1:** Match the corresponding numbers from the lower legs to the cross-member bracket, and slide each of the lower legs onto the cross-member bracket.

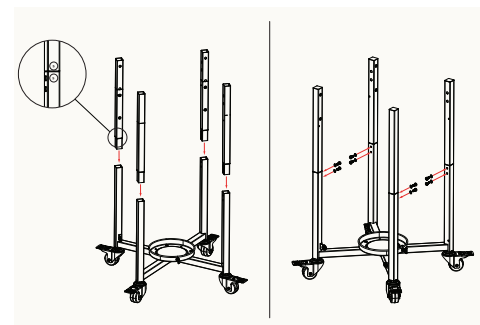

**Step 3:** Match the corresponding numbers from the lower legs to the upper legs. Attach the appropriate upper leg to the lower legs using (2) screws and (2) washers for each leg.

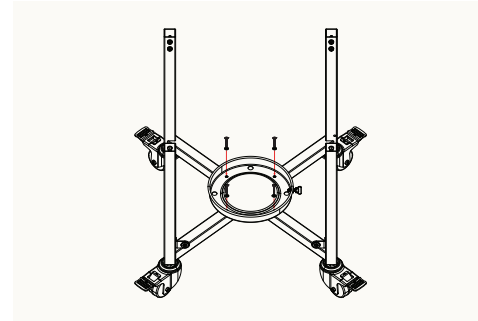


**Step 2:** Connect the propane tank base to the cross-member bracket using (4) screws and (4) washers.




**Step 4:** Loosely attach (4) screws and (4) washers into the appropriate holes on the upper legs. The screws should be facing in towards each other.


Slide the middle shelf onto the loosely attached screws. Tighten the screws to secure the shelf into place.

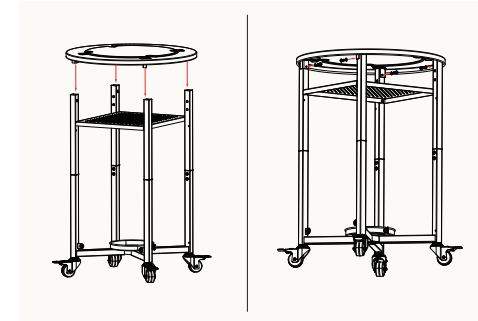

**Step 5:** Align the top shelf into place over the upper legs. Secure the top shelf into place using (4) screws and washers.

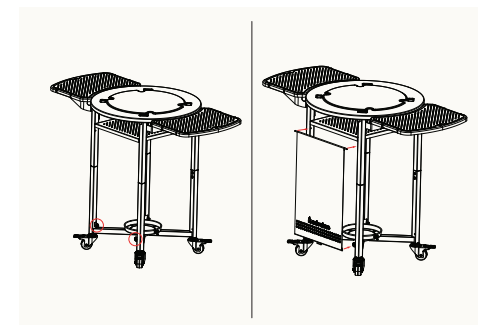


**Step 8:** Locate the side of the Cart with (2) magnets facing outwards on the bottom legs. Slide the Solo Stove branded logo panel into each hole located below the middle shelf.

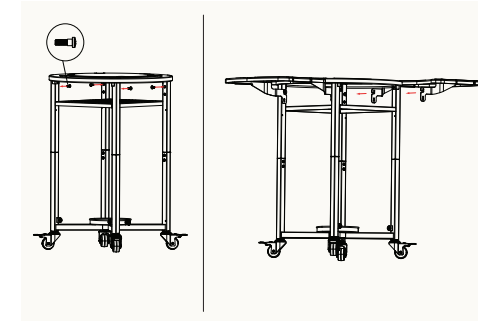


**Step 6:** Loosely attach a step screw into each upper leg in the top holes position only.

Place a shelf around the top screws. Repeat on the other side.

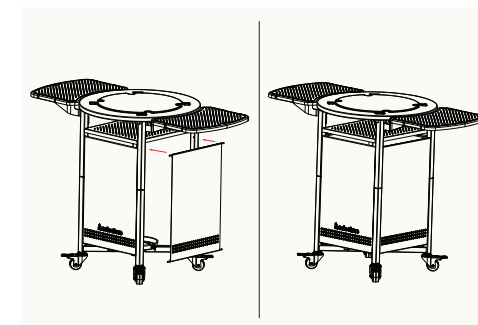

**Step 9:** Attach the remaining 3 fabric panels.

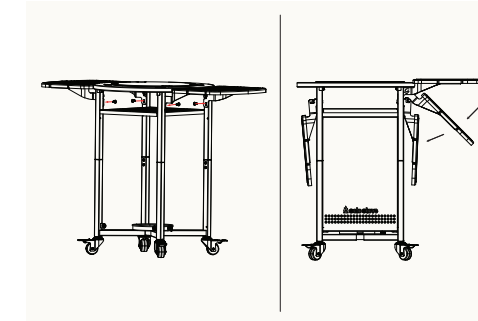

**Step 7:** Use (4) step screws in the lower hole positions to secure the shelf to the upper legs.

**NOTE:** Test out the screw tightness by lifting the shelf up and down. Shelves should be fluid, yet secure.

## IMPORTANT SAFETY WARNINGS

**WARNING:** Failure to comply with all the manual provisions and usage guidelines could result in property damage, serious bodily injury, death, or fire. Solo stove. Does not accept any responsibility, legal or otherwise, for the incidental or consequential damage to property or persons resulting from the misuse of this product. Solo stove shall in no event be liable for any special, indirect, consequential, or other damages of any nature whatsoever in excess of the original purchase price.

## USAGE AND SAFETY GUIDELINES

- FOR OUTDOOR RESIDENTIAL USE ONLY
- Use only with Solo Stove Pi 12 and Pi Prime Pizza Ovens.
- For use on level, stable surfaces only. Do NOT use the Cart on inclined surfaces, uneven ground, loose material, wet surfaces, vehicles, boats, stairs, or surfaces not designed to handle the weight of the Cart and Pi 12 Pizza Oven. Exercise caution when rolling over uneven transitions such as expansion joints, changes in material surface, or outdoor rugs as these may catch on the wheels and cause the Cart to tip.
- All Cart wheels should remain locked unless moving the Cart.
- Do NOT modify or alter the Cart or use in a manner other than specified.
- The Cart should be moved by using the hand locations on either shelf. Do not attempt to move the Cart using other locations on the Cart or by pushing or pulling on the Pizza Oven.
- Do not drop items onto shelves.
- Do NOT move the Cart while Pizza Oven is in use or still warm. The Cart may also become hot during use of the Pizza Oven. Allow to cool and remove all items from shelves prior to moving.
- The powder-coated finish is very durable, but it can be scratched. Do not drag items across the shelves to avoid damaging the surface.
- Do not place hot items from the oven directly onto the shelves as damage could result. Use heat protection.
- For use with 20lb propane capacity barbecue style tanks with QCC-1 connections.
- Use only propane tanks that conform to US Department of Transportation (DOT) or the Standard for Cylinders, Spheres and Tubes for the Transportation of Dangerous Goods, CAN/CSA B339
- Ensure that the propane tank is fully seated and properly secured with the retaining bolt prior to usage. Propane tank should be rotated so that the retaining bolt aligns with open hole in base of tank. Retaining bolt should be secured through this hole so tank cannot be removed.