

label 料号: label Part NO.:
X40G000923112A

版本号Version NO.
A ☒ B ☐ C ☐

客 户 Customer	ROKU
型 号 Model	55RAD5
销 向 Sales Area	USA

材质Material:

包装方式Packing style:
卷状 ☐ 片状 ☒
Coil Piece

安规签核Safety parts:
Yes ☒ No ☐

颜色标注Color Mark

版本变更说明:
Version Changed Description:

备注Remark:

冠捷显示科技(厦门)有限公司
TPV Display Technology (Xiamen) Co.,Ltd
地址(Add):中国福建厦门翔安区翔海路1号
Xianghai No.1,Xiang'an District,Xiamen
City,Fujian Province,PRC
电话(Tel): +86-592-3686666
邮编(Postcode):361101


贴附示意图




- NOTE:
- Printing as the above drawing.
印刷版面见上图。
 - Dimension:38.1x139.7mm(Tolerance:+/-0.5mm), as the above drawing.
尺寸: 38.1x139.7mm (公差: +/-0.5mm), 具体见上图所示。
 - Material: 50# White PET +Low-viscosity glue
材质: 50番白色PET+低粘胶, 贴于panel右上角, 撕下不可有残胶。
 - Background color:Yellow,Fonts color:Black.
底色: 黄色; 字体颜色: 黑色。
 - Stickiness strength :Cut label into 25mm width ,one end paste on the plate , with 180 ° direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.
粘力: 将label切成25mm宽, 一端粘贴于钢板上, 以180°方向的力拉胶带另一端, 所得拉力即为粘力。
用粘力测试仪进行测试。
 - The normal temperature test: The range of temperature on plate is -20~100 ° C . In 80 ~100 ° C to maintain 8 hours , the label should not be warp,delamination,frothy and so on. The range of temperature on plastic and carton is -20~65 ° C. In 65 ° C to maintain 8 hours ,the label should not be warp, delamination,frothy and so on.
正常耐温测试: 在钢板上耐温范围为-20~100°C, 在80~100°C保持8小时后不翘角不分层不脱落不起泡等。
在塑胶、纸箱上耐温范围为-20~65°C, 在65°C保持8小时后不翘角不分层不脱落不起泡等。
 - Temperature and humidity cycle test : Cycle conditions(stick on texture(PET) , stick on texture/carton(art paper):
In temperature of -20~60 ° C and humidity of 30~90% to maintain 96 hours , the label should not be warp, delamination,frothy and so on.
耐温湿度循环测试: 循环条件(贴在塑胶咬花面(PET)贴在塑胶咬花面/纸箱(铜板纸)): 温度-20~60°C, 湿度30~90%, 时间 96小时后不翘角不分层不脱落不起泡等。
 - Printing ink can not have overflow and printing color can not be uneven etc.
印刷不可有溢墨及颜色不均等不良现象
 - Packing style: piece.
包装方式: 片状。

- 1) 根据 TPV 推行 RoHS 的有关规定, 所有的原材料及辅助材料必须符合 RoHS 的有关规定
- 2) 所有原材料的规定物质: 如镉 (Cd) 汞 (Hg) 铅 (Pb) 六价铬 PBB's PBDE's 及镉 (Cd)+汞 (Hg)+铅 (Pb)+六价铬 (针对随机出货的包装材料) 的具体含量依据最新版 RD EMS-01<<供应商环境管理物质管控标准>>的具体限值要求执行

印刷图稿:

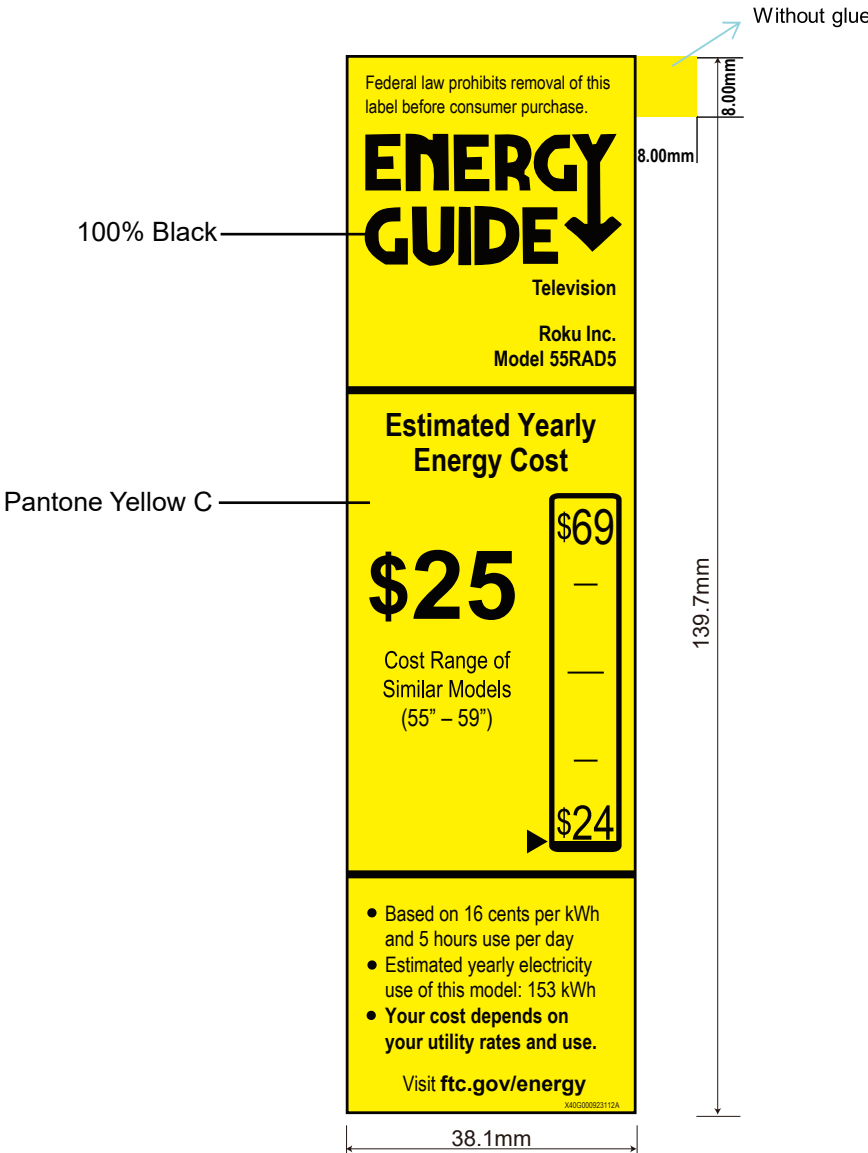

字体要求:

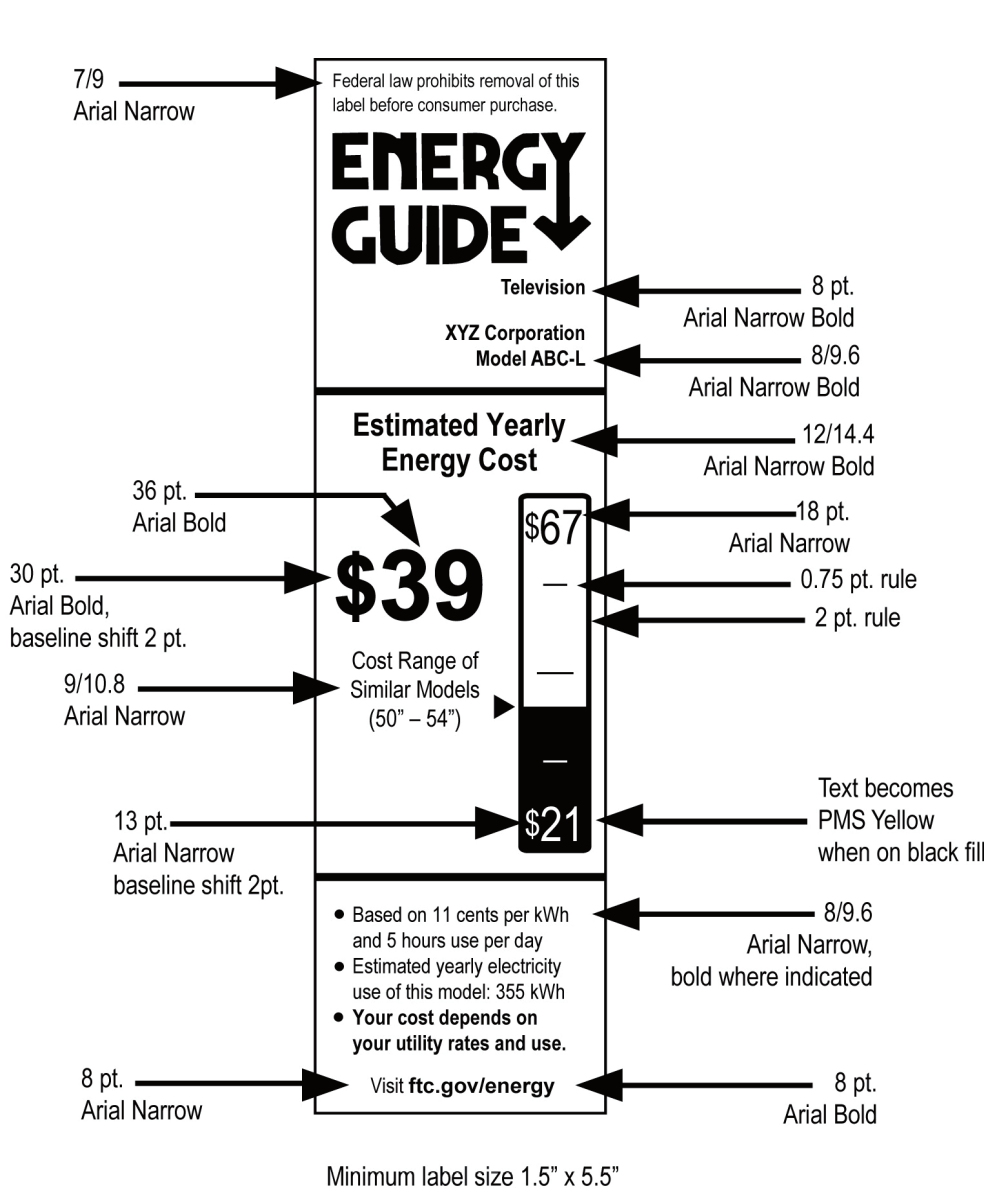

* Typeface is Arial Narrow and Arial or equivalent type style. Type sizes shown are minimum allowable. Use bold or heavy typeface where indicated. Type is black printed on process yellow or equivalent color background. Energy Star logo, if applicable, must be at least 0.36" wide.

- 1)According to the rule abut RoHS of TPV,All raw material and assistant material and assistant material should accord with the rule of RoHS
- 2)All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr(aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard aboutenvironment substance for supplier>>.