MATCO TOOLS

TFS5DBL


Made in U.S.A.

Part No: TFS5DBL

5 pc. 1/2" dr. Double-Duty flip socket set

On one side is a standard 6-point socket. Flip it over and you have a TWISTSOCKET damaged wheel lug remover of the same size!

Standard 6-point socket for good wheel lugs

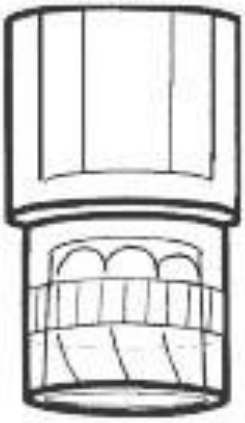

6-fluted TWISTSOCKET for removing damaged or rounded oil drain plugs

Included
½" x 3.5"
CXP3B

Size	Part#
17mm socket	DBL17
19mm socket	DBL19
21mm socket	DBL21
13/16" socket	DBL13
7/8" socket	DBL78

INSTRUCTIONS:

1. To remove damaged wheel lug, place **Twist Socket** on plug so it just catches a portion of head *(Do not place socket on so it completely covers wheel lug. Allow room for* **TwistSocket** *to draw itself onto lug.)*
2. Turn counter-clockwise with a 1/2" impact, breaker bar, ratchet or related tool. (**DO NOT pound** socket onto damaged wheel lug.)

NOTE:

6-point socket end can be used for installing and/or removing good oil drain plugs. **TWISTSOCKET** end identified by textured knurling should used only to remove damaged wheel lugs.