



4S TB ACCESORIES

4S TOP ACCESSORY INSTALLATION INSTRUCTIONS


IMPORTANT SAFETY INSTRUCTIONS-SAVE THESE INSTRUCTIONS

WARNING! 4S ACCESSORIES MUST ONLY BE INSTALLED ON A TOOLBOX OF THE SAME SERIES OR SERIOUS INJURY MAY OCCUR.

WARNING! ALL ACCESSORIES MUST BE MOUNTED SECURELY TO A TOOLBOX BEFORE USE!


4S HUTCH (HTC) AND HALF CHEST (HCA) STACKING & MOUNTING INSTRUCTIONS.

1. Read all instructions.
2. Remove top board from toolbox and from the top accessory.
3. If stacking a half chest, remove the top two and bottom two drawers of the half chest.
If stacking a hutch, remove the door using the quick disconnect features on the hinges.
4. Using the quick disconnect feature on the drawer slide, remove the top drawer(s) from the toolbox.
5. To lift your top accessory, insert 2 eyebolts through the 5/8" holes in the top of the accessory (see below, hutch shown) and secure with flat washers and nuts from the underside.

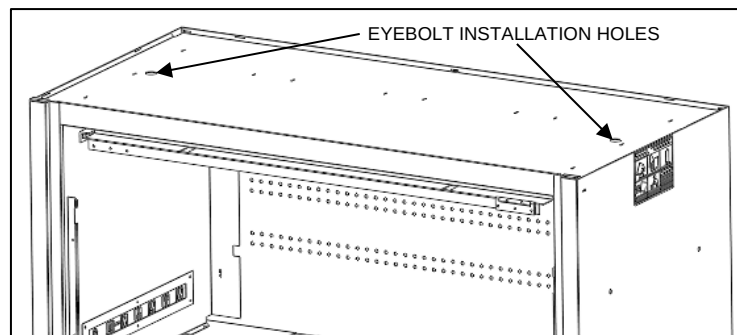

6. Before lifting the top accessory, be sure all doors / drawers are either removed, or closed and locked, and verify that the eyebolts are secure.
7. Slowly lift the top accessory onto the toolbox. Align the side and back of the accessory to the top of the toolbox. Remove eyebolts.
8. Open hardware pack (HDWE-TCHX). Place a washer onto each bolt and place from top down into the mounting holes (as shown on the right). Place a washer and nut onto each bottom of the bolts inside the toolbox and tighten.
9. Replace all drawers and tops. The top board from the toolbox may be placed on top of the top accessory.
10. Make sure all power cords are routed so as to not touch the floor. Use of the magnetic clip supplied with the toolbox is recommended.

NOTE: A 2-bay top accessory may be installed on a 3-bay toolbox aligned with either the left or the right side.

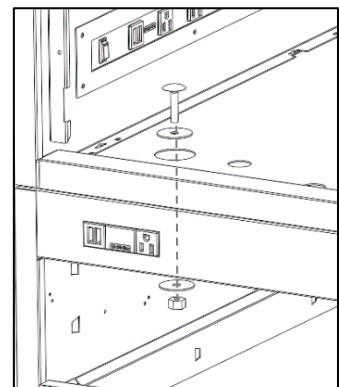



4S TB ACCESORIES

4S TOP DRAWER INSTALLATION INSTRUCTIONS


IMPORTANT SAFETY INSTRUCTIONS-SAVE THESE INSTRUCTIONS

WARNING! 4S ACCESSORIES MUST ONLY BE INSTALLED ON A TOOLBOX OF THE SAME SERIES OR SERIOUS INJURY MAY OCCUR.

WARNING! ALL ACCESSORIES MUST BE MOUNTED SECURELY TO A TOOLBOX BEFORE USE!



4S TOP DRAWER (TDA) STACKING & MOUNTING INSTRUCTIONS.

1. Read all instructions.
2. Remove top board from toolbox.
3. Remove the drawer(s) from the top drawer using the quick disconnect feature on the drawer slides. Remove the top drawer(s) from the toolbox.
4. Use a drill or chisel to remove access plates from top of the toolbox (shown below).

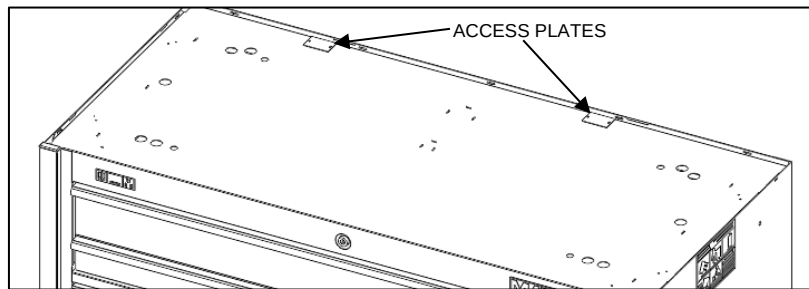

5. Slowly lift the top drawer onto the toolbox. Align the side and back of the top drawer to the top of the toolbox.
6. Open hardware pack (HDWE-TCHX). Place a washer onto each bolt and place from top down into the mounting holes (as shown on the right). Place a washer and nut onto each bottom of the bolts inside the toolbox and tighten.
7. Install the top drawer lock mechanism:

- Install lockbars into top drawer from the top (oriented as shown below with the hole down).

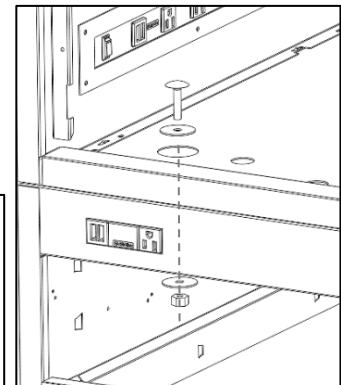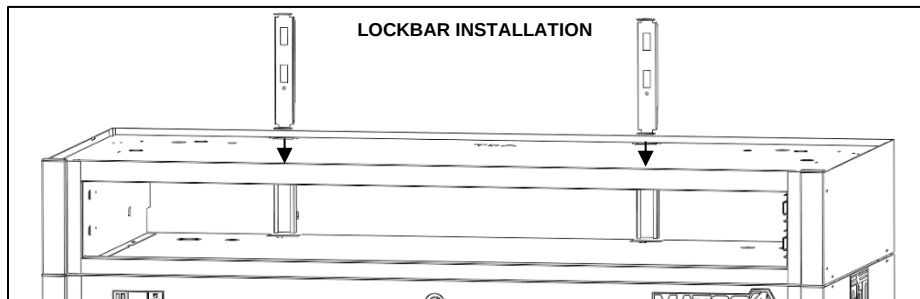

- Reach inside the top drawer unit and attach springs from each lockbar to the bottom of the top drawer (as shown on the right).
- Actuate the lock on the toolbox using the key and ensure that the top drawer lockbars move up and down with the toolbox lockbars.

8. Replace all drawers.
9. Actuate the toolbox lock and ensure the drawer(s) in the top drawer unit lock and unlock. If the drawers do not lock, bend the bottom flanges on the top drawer lockbars upward. If the drawers do not unlock, bend the bottom flanges downward.
10. Install lockbar access plates to top of top drawer unit with provided rivets.
11. Place the top board from the toolbox on top of the top drawer.



NOTE: A 2-bay top drawer may be installed on a 3-bay toolbox ONLY if aligned with the left side of the toolbox.



4S TB ACCESORIES

4S SIDE LOCKER INSTALLATION INSTRUCTIONS


IMPORTANT SAFETY INSTRUCTIONS-SAVE THESE INSTRUCTIONS

WARNING! 4S ACCESSORIES MUST ONLY BE INSTALLED ON A TOOLBOX OF THE SAME SERIES OR SERIOUS INJURY MAY OCCUR.

WARNING! ALL ACCESSORIES MUST BE MOUNTED SECURELY TO A TOOLBOX BEFORE USE!


4S LOCKER (LKR) MOUNTING INSTRUCTIONS.

1. Read all instructions.
2. Remove top board from top accessory.
3. To lift your side locker, insert 2 eyebolts through the center 5/8" holes in the top of the accessory and secure with flat washers and nuts from the underside. Alternatively, a pallet jack may be used to lift from below.
4. Before lifting the side locker, be sure the door is closed and locked, and verify that the eyebolts are secure. Ensure there is enough weight in the toolbox to prevent tipping.
5. Slowly lift the side locker until the top curl is situated above the top edge of the top accessory. Align the front of the side locker to the front of the toolbox. Slowly lower the side locker until the curl is engaged with the top edge of the top accessory. Remove eyebolts.
6. Open hardware pack (HDWE-LOCKER). Install four screws from inside of locker (as shown on the right).
7. Attach security clamp (HDWE-CLAMP) into the bottom of the locker and toolbox.
8. Replace top board.

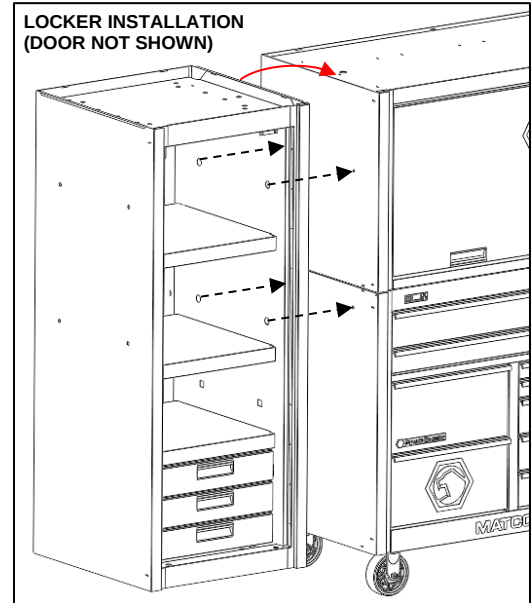

4S LOCKER ADAPTER (4AMP) MOUNTING INSTRUCTIONS.

1. To install a side locker to a toolbox without a hutch or half chest, a locker adapter must be used.
2. Before installing the locker adapter, lock the brakes on the toolbox and make sure it is immobile.
3. Remove top board from toolbox.
4. Lift locker adapter and align curl with edge of toolbox. Lower until curl engages.
5. Open hardware pack (HDWE-8ADK). Insert two screws through holes in adapter and into toolbox and tighten.
6. Proceed to attach locker to adapter using the steps above, except that only the upper two screws will be installed from the locker into the adapter (as shown on the right).
7. Attach security clamp (HDWE-CLAMP) into the bottom of the locker and locker adapter.
8. Replace top board.

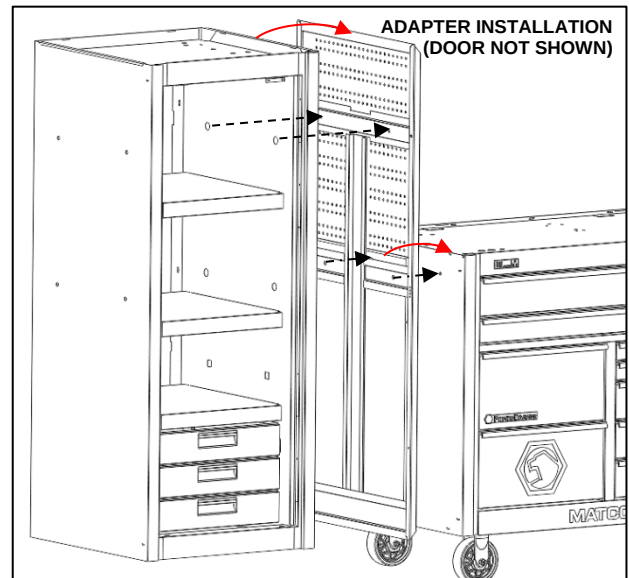

REVISION	DESCRIPTION OF CHANGE	DATE	ECN	INITIALS
A	DOCUMENT CREATED	1/30/2025	-	CAP