




LOVE AT FIRST SPEC

Not Flowers

When Compatibility Really Matters,
Choose the Perfect Cable

**Mini-Circuits' Cable
Selection Guide**

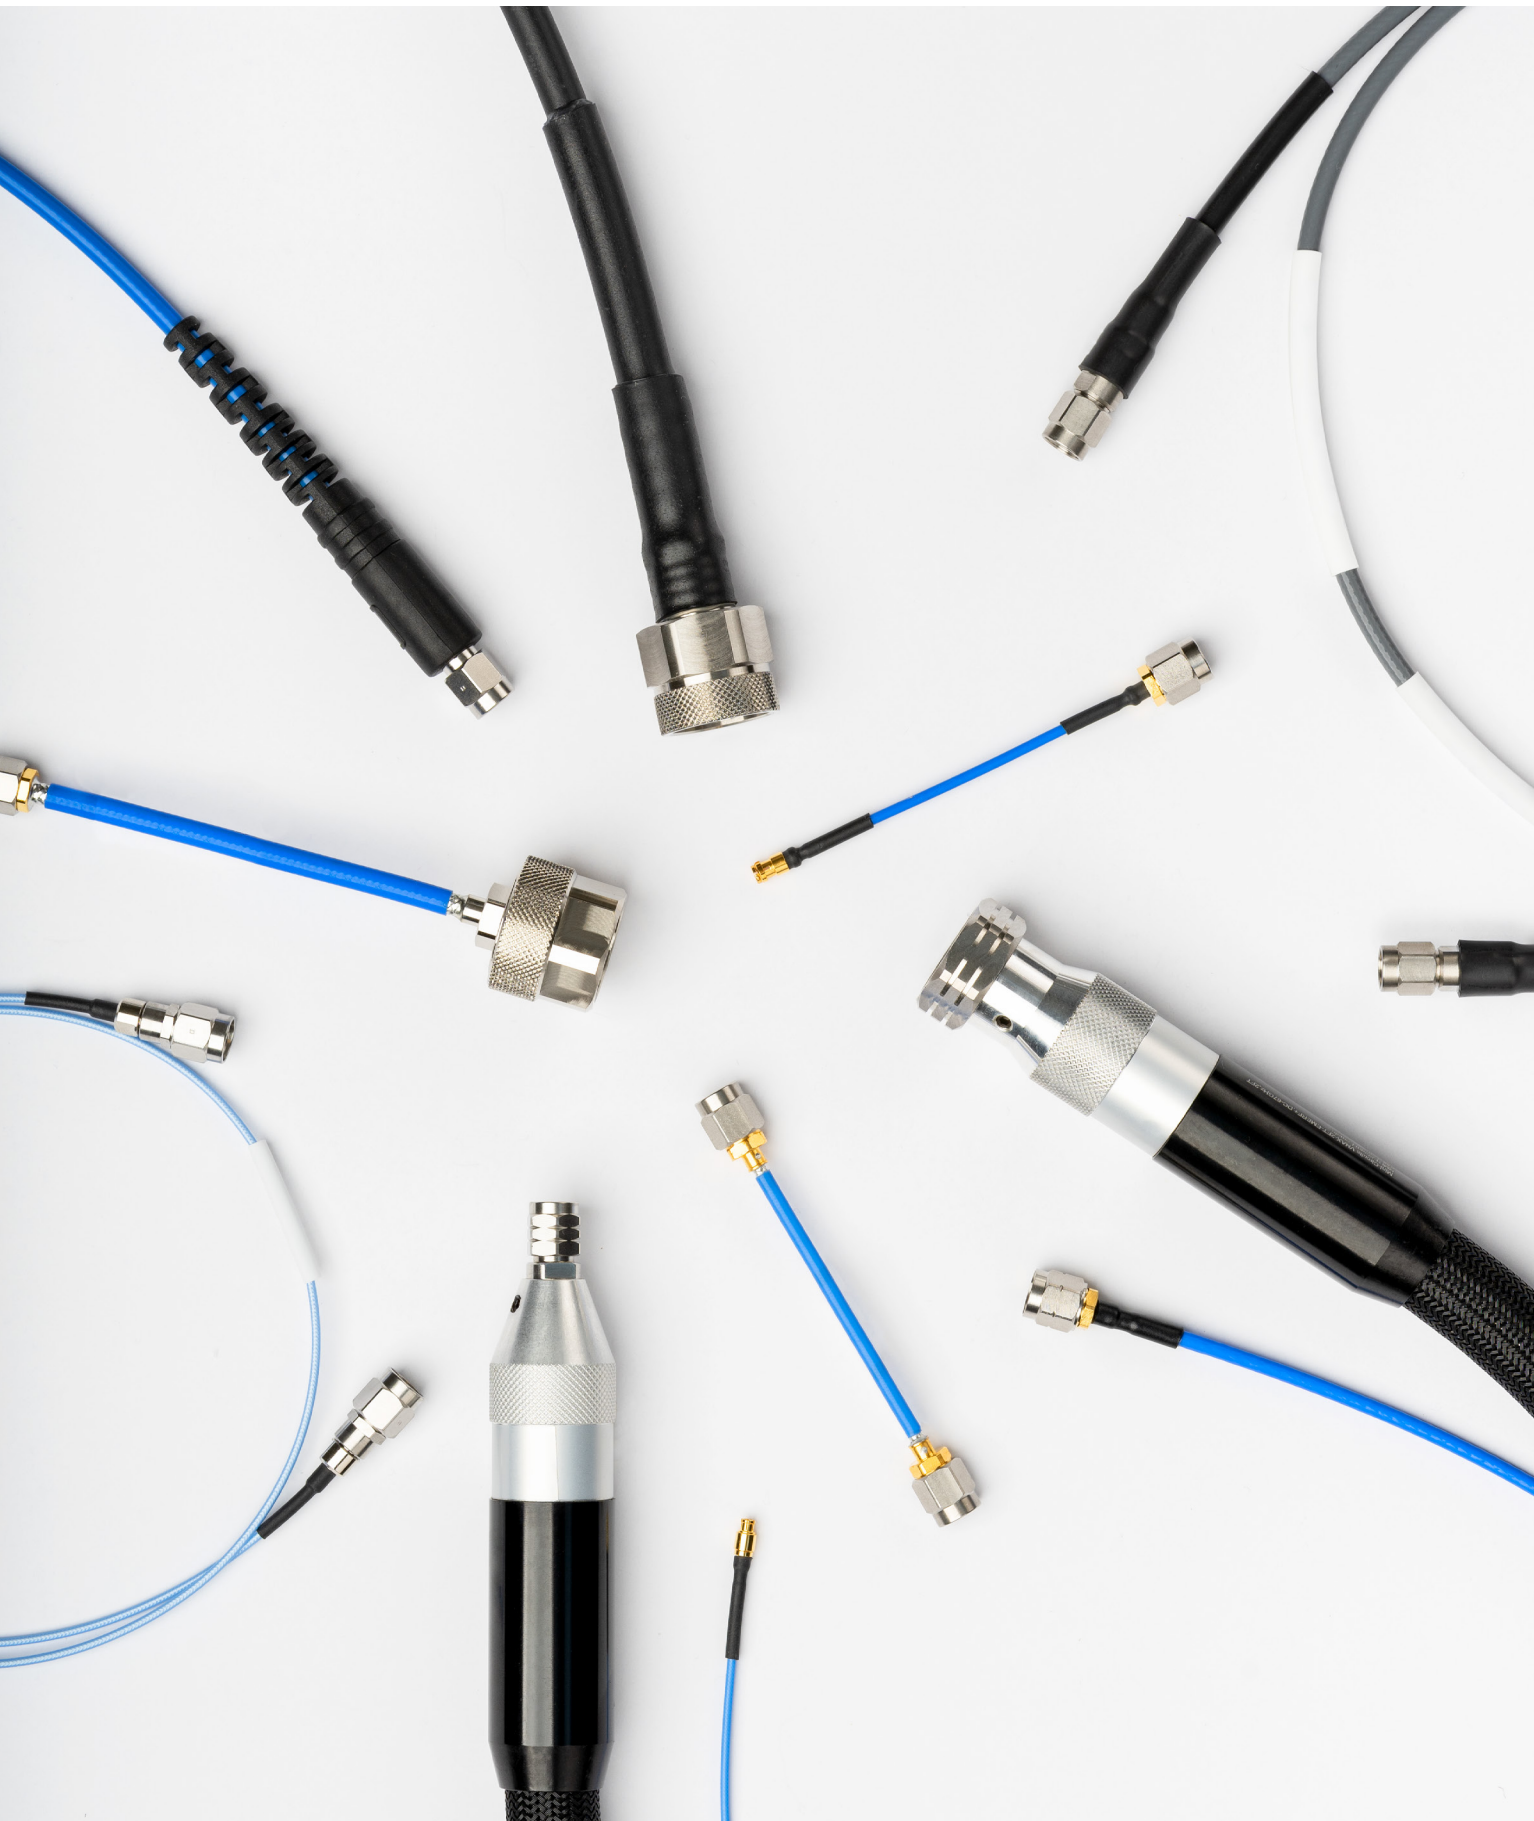

Quick Cable Selection Guide

Mini-Circuits' suite of RF cable solutions is built for precision, performance, and versatility. Our RF/microwave interconnect and precision test cables are available for 50-Ohm and 75-Ohm systems, covering frequencies from DC to 110 GHz. With connector options including SMA, N-Type, F-Type, BNC, DIN, and 2.92mm, we provide unmatched flexibility across applications.

This selection guide provides an overview of the cable categories available from Mini-Circuits, followed by full selection guides for each category. See the website for the most up-to-date listings and actively filter cable products by each specification.

Cable Type	Series	Frequency	Description	Connectors
Hand Formable	047	DC-18GHz	Low cost, formable cables similar to semi-rigid	SMA, N
Hand Formable	086	DC-3,6,18,40GHz	Low cost, formable cables similar to semi-rigid	SMA, SMP
Hand Formable	141	DC-3,6,12.5,18GHz	Low cost, formable cables similar to semi-rigid	BNC, MMCX, SMA, 2.92mm
Hand Formable, Non-Magnetic	141, 086	DC-18GHz	Non-magnetic cable and connectors, formable cables similar to semi-rigid	SMA, SMP, SMPM, SSMP
Standard Flexible	FL047	DC-40, 50GHz	Low cost flexible cable for a range of interconnect	2.92mm, 2.4mm, SMPM
Standard Flexible	FL086	DC-18, 26.5, 33, 40, 50GHz	Low cost flexible cable for a range of interconnect	SMA, N, 3.5mm, 2.92mm, SMP, SMPM
Standard Flexible	FL141	DC-18GHz	Low cost flexible cable for a range of interconnect	SMA, N
Standard Flexible	SLC	DC-18GHz	Super flexible test cables, extra stability of performance vs flex, 0.25" min bend radius	SMA
Test & Measurement, Armored	APC	DC-18GHz	Crush resistant armored cable construction for production floors	SMA, N
Test & Measurement, Armored	KBL	DC-40GHz	Crush resistant armored cable construction for production floors	2.92mm
Test & Measurement, Low Loss	L235	DC-6GHz	Low loss, high power handling	DIN, DIN/N
Test & Measurement, Low Loss	L235	DC-18GHz	Low loss, high power handling	N
Test & Measurement, Armored	AP110	DC-110GHz	Armored High frequency cable	1.0mm
Test & Measurement, Flexible	CBN	DC-26GHz	Flexible phase and amp stable, low loss	SMA, N, TNC
Test & Measurement, Flexible	ULC	DC-18GHz	Ultra-flexible and wideband with booted connector junctions for reliable connection	SMA, N
Test & Measurement, Flexible	CBL	DC-18GHz	All purpose, triple shielded workhorse cable	SMA, N, Quick
Test & Measurement, Flexible	T40	DC-40GHz	All purpose, triple shielded workhorse cable	2.4mm, 2.9mm
Test & Measurement, Flexible	T50	DC-50GHz	All purpose, triple shielded workhorse cable	2.4mm
Test & Measurement, Flexible	E40	DC-40GHz	Lower cost, double shielded	2.9mm
Test & Measurement, Flexible	E50	DC-50GHz	Lower cost, double shielded	2.4mm
Test & Measurement, Flexible	E67	DC-67GHz	Lower cost, double shielded	1.85mm
Test & Measurement, Flexible	VNA/ VNAX	DC-40, 50 or 67GHz	Low loss precision VNA cables for test and measurement equipment	2.92, 2.4, 1.85mm
Test & Measurement, Flexible-Temperature	TMP40	DC-40GHz	Triple shielded with excellent phase stability over temperature	2.92mm
Test & Measurement, Unarmored	WBL	DC-100GHz	High frequency, high reliability	1.0mm

Conformable Hand-Flex: semi-rigid replacement

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
047-12SMP+	18	1.51	1	SMP	Female	Straight	Standard	SMP	Female	Straight	Standard
047-12SMPR+	18	1.53	1	SMP	Female	Right Angle 0° Clock	Standard	SMP	Female	Right Angle 0° Clock	Standard
047-12SMPRC+	18	1.55	1	SMP	Female	Right Angle 180° Clock	Standard	SMP	Female	Right Angle 0° Clock	Standard
047-12SMPSM+	18	1.51	1	SMA	Male	Straight	Standard	SMP	Female	Straight	Standard
047-3SMP+	18	0.34	0.25	SMP	Female	Straight	Standard	SMP	Female	Straight	Standard
047-3SMPR+	18	0.39	0.25	SMP	Female	Right Angle 0° Clock	Standard	SMP	Female	Right Angle 0° Clock	Standard
047-3SMPRC+	18	0.39	0.25	SMP	Female	Right Angle 180° Clock	Standard	SMP	Female	Right Angle 0° Clock	Standard
047-3SMPSM+	18	0.35	0.25	SMA	Male	Straight	Standard	SMP	Female	Straight	Standard
047-6SMP+	18	0.72	0.5	SMP	Female	Straight	Standard	SMP	Female	Straight	Standard
047-6SMPR+	18	0.75	0.5	SMP	Female	Right Angle 0° Clock	Standard	SMP	Female	Right Angle 0° Clock	Standard
047-6SMPRC+	18	0.78	0.5	SMP	Female	Right Angle 180° Clock	Standard	SMP	Female	Right Angle 0° Clock	Standard
047-6SMPSM+	18	0.75	0.5	SMA	Male	Straight	Standard	SMP	Female	Straight	Standard
086-10BM+	3	0.22	0.83	BNC	Male	Straight	Standard	BNC	Male	Straight	Standard
086-10BSBM+	18	0.78	0.83	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
086-10SM+	18	0.85	0.83	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-10SMP+	18	1.05	0.83	SMP	Female	Straight	Standard	SMP	Female	Straight	Standard
086-10SMPR+	18	0.83	0.83	SMP	Female	Right Angle 0° Clock	Standard	SMP	Female	Right Angle 0° Clock	Standard
086-10SMR+	18	1.16	0.83	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-10SMRSM+	18	1.12	0.83	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-11BSBM+	18	1.1	0.92	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
086-11SM+	18	1.17	0.92	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-11SMR+	18	1.22	0.92	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-11SMRSM+	18	0.8	0.92	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-12BM+	3	0.27	1	BNC	Male	Straight	Standard	BNC	Male	Straight	Standard
086-12KM+	40	1.7	1	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
086-12BSBM+	18	0.9	1	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
086-12SM+	18	1.01	1	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-12SMMCR+	6	0.6	1	SMA	Male	Straight	Standard	MCX	Male	Right Angle 0° Clock	Standard

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
086-12SMR+	18	1.3	1	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-12SMRC+	18	1.22	1	SMA	Male	Right Angle 180° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-12SMRSM+	18	1.24	1	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-13SM+	18	1	1.08	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-14SBSM+	18	1.03	1.17	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
086-14SM+	18	1.13	1.17	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-14SMR+	18	1.49	1.17	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-14SMRSM+	18	1.36	1.17	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-15KM+	40	2.2	1.25	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
086-15SM+	18	1.19	1.25	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-15SMRSM+	18	1.43	1.25	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-16SBSM+	18	1.1	1.33	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
086-16SM+	18	1.33	1.33	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-16SMRSM+	18	1.5	1.33	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-18BM+	3	0.39	1.5	BNC	Male	Straight	Standard	BNC	Male	Straight	Standard
086-18KM+	40	2.4	1.5	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
086-18SBSMR+	18	1.71	1.5	SMA	Male	Right Angle 0° Clock	Standard	SMA	Female	Straight	Bulkhead
086-18SM+	18	1.41	1.5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-18SMR+	18	1.9	1.5	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-18SMRSM+	18	1.7	1.5	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-20SM+	18	1.87	1.67	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-22SM+	18	2.02	1.83	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-24BM+	3	0.51	2	BNC	Male	Straight	Standard	BNC	Male	Straight	Standard
086-24KM+	40	3.2	2	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
086-24SM+	18	2.02	2	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-24SMR+	18	1.7	2	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-24SMRSM+	18	2.25	2	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
086-2SM+	18	0.33	0.17	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-2SMR+	18	0.47	0.17	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
086-2SMRC+	18	0.47	0.17	SMA	Male	Right Angle 180° Clockwise	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-36SM+	18	2.44	3	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-3KM+	40	0.49	0.25	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
086-3SBSM+	18	0.47	0.25	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
086-3SBSMR+	18	0.36	0.25	SMA	Male	Right Angle 0° Clockwise	Standard	SMA	Female	Straight	Bulkhead
086-3SM+	18	0.31	0.25	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-3SMR+	18	0.39	0.25	SMA	Male	Right Angle 0° Clockwise	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-3SMRC+	18	0.45	0.25	SMA	Male	Right Angle 180° Clockwise	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-3SMRSM+	18	0.38	0.25	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-4KM+	40	0.6	0.33	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
086-4SBSMR+	18	0.56	0.33	SMA	Male	Right Angle 0° Clockwise	Standard	SMA	Female	Straight	Bulkhead
086-4SM+	18	0.34	0.33	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-4SMR+	18	0.59	0.33	SMA	Male	Right Angle 0° Clockwise	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-4SMRSM+	18	0.57	0.33	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-5SBSM+	18	0.42	0.42	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
086-5SBSMR+	18	0.71	0.42	SMA	Male	Right Angle 0° Clockwise	Standard	SMA	Female	Straight	Bulkhead
086-5SM+	18	0.41	0.42	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-5SMR+	18	0.66	0.42	SMA	Male	Right Angle 0° Clockwise	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-5SMRSM+	18	0.57	0.42	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-6BM+	3	0.14	0.5	BNC	Male	Straight	Standard	BNC	Male	Straight	Standard
086-6KM+	40	0.89	0.5	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
086-6SBMMCR+	6	0.3	0.5	MMCX	Male	Right Angle 0° Clockwise	Standard	SMA	Female	Straight	Bulkhead
086-6SBSM+	18	0.47	0.5	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
086-6SBSMR+	18	0.76	0.5	SMA	Male	Right Angle 0° Clockwise	Standard	SMA	Female	Straight	Bulkhead
086-6SM+	18	0.52	0.5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-6SMR+	18	0.76	0.5	SMA	Male	Right Angle 0° Clockwise	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-6SMRC+	18	0.68	0.5	SMA	Male	Right Angle 180° Clockwise	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-6SMRSM+	18	0.57	0.5	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clockwise	Standard

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
086-7SBSM+	18	0.59	0.58	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
086-7SM+	18	0.6	0.58	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-7SMR+	18	0.97	0.58	SMA	Male	Right Angle 0° Clockwise	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-7SMRSM+	18	0.88	0.58	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-8BM+	3	0.18	0.67	BNC	Male	Straight	Standard	BNC	Male	Straight	Standard
086-8SBSM+	18	0.7	0.67	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
086-8SM+	18	0.69	0.67	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-8SMR+	18	0.9	0.67	SMP	Female	Right Angle 0° Clockwise	Standard	SMP	Female	Right Angle 0° Clockwise	Standard
086-8SMPSM+	18	0.63	0.67	SMA	Male	Straight	Standard	SMP	Female	Straight	Standard
086-8SMR+	18	0.93	0.67	SMA	Male	Right Angle 0° Clockwise	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-8SMRSM+	18	0.92	0.67	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-9KM+	40	1.4	0.75	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
086-9SBSM+	18	0.72	0.75	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
086-9SM+	18	0.79	0.75	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
086-9SMR+	18	1.01	0.75	SMA	Male	Right Angle 0° Clockwise	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-9SMRC+	18	1	0.75	SMA	Male	Right Angle 180° Clockwise	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
086-9SMRSM+	18	1.01	0.75	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
141-0.5MSM+	18	0.86	1.64	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-1.5MSM+	18	3.53	4.92	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-10BM+	3	0.15	0.83	BNC	Male	Straight	Standard	BNC	Male	Straight	Standard
141-10NM+	18	0.53	0.83	N-Type	Male	Straight	Standard		Male	Straight	Standard
141-10SM+	18	0.59	0.83	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-10SMNB+	12.5	0.4	0.83	N-Type	Female	Straight	Bulkhead	SMA	Male	Straight	Standard
141-10SMNM+	18	0.69	0.83	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
141-10SMRNM+	18	0.5	0.83	N-Type	Male	Straight	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
141-10SMRSM+	18	0.8	0.83	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
141-11SM+	18	0.57	0.92	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-11SMRSM+	18	0.8	0.92	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clockwise	Standard
141-12BM+	3	0.17	1	BNC	Male	Straight	Standard	BNC	Male	Straight	Standard

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
141-12NM+	18	0.69	1	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
141-12NM-300W+	6	0.31	1	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
141-12SM+	18	0.66	1	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-12SMNB+	12.5	0.58	1	N-Type	Female	Straight	Bulkhead	SMA	Male	Straight	Standard
141-12SMNM+	18	0.77	1	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
141-12SMR+	18	0.76	1	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-12SMRC+	18	0.72	1	SMA	Male	Right Angle 180° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-12SMRSM+	18	0.8	1	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-13SM+	18	0.5	1.08	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-13SMRSM+	18	0.92	1.08	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-14BM+	3	0.2	1.17	BNC	Male	Straight	Standard	BNC	Male	Straight	Standard
141-14SM+	18	0.73	1.17	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-14SMNB+	12.5	0.64	1.17	N-Type	Female	Straight	Bulkhead	SMA	Male	Straight	Standard
141-14SMRSM+	18	1.03	1.17	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-15SM+	18	0.85	1.25	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-15SMRSM+	18	1	1.25	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-16SM+	18	0.9	1.33	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-16SMNB+	12.5	0.76	1.33	N-Type	Female	Straight	Bulkhead	SMA	Male	Straight	Standard
141-16SMRSM+	18	1.04	1.33	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-17SM+	18	0.96	1.42	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-17SMRSM+	18	1.11	1.42	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-18BM+	3	0.25	1.5	BNC	Male	Straight	Standard	BNC	Male	Straight	Standard
141-18NM-300W+	6	0.45	1.5	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
141-18SM+	18	0.89	1.5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-18SMNB+	12.5	0.81	1.5	N-Type	Female	Straight	Bulkhead	SMA	Male	Straight	Standard
141-18SMNM+	18	1.19	1.5	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
141-18SMRSM+	18	0.93	1.5	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-19SM+	18	0.86	1.58	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-1MSM+	18	1.67	3.28	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
141-20SM+	18	0.92	1.67	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-20SMNB+	12.5	1.01	1.67	N-Type	Female	Straight	Bulkhead	SMA	Male	Straight	Standard
141-20SMRSM+	18	1.12	1.67	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-22SM+	18	1.12	1.83	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-24BM+	3	0.31	2	BNC	Male	Straight	Standard	BNC	Male	Straight	Standard
141-24NM+	18	1.21	2	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
141-24NM-300W+	6	0.57	2	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
141-24SBSM+	18	1.1	2	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
141-24SM+	18	1.12	2	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-24SMNB+	12.5	1.18	2	N-Type	Female	Straight	Bulkhead	SMA	Male	Straight	Standard
141-24SMNM+	18	1.32	2	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
141-24SMRSM+	18	1.55	2	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-26SM+	18	1.2	2.17	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-2MSM+	18	3.36	6.56	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-2SM+	18	0.15	0.17	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-2SMR+	18	0.14	0.17	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-2SMRC+	18	0.21	0.17	SMA	Male	Right Angle 180° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-30NM-300W+	6	0.7	2.5	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
141-30SM+	18	1.27	2.5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-32SM+	18	1.3	2.67	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-36SBSMR+	18	1.6	3	SMA	Male	Right Angle 0° Clock	Standard	SMA	Female	Straight	Bulkhead
141-36SM+	18	1.51	3	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-36SMRSM+	18	2.19	3	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-3NM+	18	0.42	0.25	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
141-3SM+	18	0.21	0.25	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-3SMR+	18	0.2	0.25	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-3SMRC+	18	0.2	0.25	SMA	Male	Right Angle 180° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-3SMRSM+	18	0.28	0.25	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-40SM+	18	1.9	3.33	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
141-4SBSM+	18	0.21	0.33	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
141-4SM+	18	0.2	0.33	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-4SMNM+	18	0.49	0.33	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
141-4SMR+	18	0.31	0.33	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-4SMRC+	18	0.45	0.33	SMA	Male	Right Angle 180° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-4SMRSM+	18	0.39	0.33	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-50SM+	18	2.5	4.17	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-5SM+	18	0.29	0.42	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-5SMNM+	18	0.84	0.42	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
141-5SMR+	18	0.4	0.42	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-5SMRC+	18	0.56	0.42	SMA	Male	Right Angle 180° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-5SMRSM+	18	0.31	0.42	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-60SM+	18	2.5	5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-6BM+	3	0.1	0.5	BNC	Male	Straight	Standard	BNC	Male	Straight	Standard
141-6NM+	18	0.35	0.5	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
141-6SBSMR+	18	0.28	0.5	SMA	Male	Right Angle 0° Clock	Standard	SMA	Female	Straight	Bulkhead
141-6SM+	18	0.39	0.5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-6SMNB+	12.5	0.32	0.5	N-Type	Female	Straight	Bulkhead	SMA	Male	Straight	Standard
141-6SMNM+	18	0.67	0.5	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
141-6SMR+	18	0.46	0.5	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-6SMRC+	18	0.46	0.5	SMA	Male	Right Angle 180° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-6SMRSM+	18	0.5	0.5	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-72SM+	18	3.1	6	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-7SBSM+	18	0.37	0.58	SMA	Male	Straight	Standard	SMA	Female	Straight	Bulkhead
141-7SM+	18	0.47	0.58	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-7SMNM+	18	0.27	0.58	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
141-7SMR+	18	0.45	0.58	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-7SMRSM+	18	0.72	0.58	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-8BM+	3	0.12	0.67	BNC	Male	Straight	Standard	BNC	Male	Straight	Standard

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
141-8NM+	18	1.2	0.67	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
141-8SM+	18	0.42	0.67	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-8SMNB+	12.5	0.32	0.67	N-Type	Female	Straight	Bulkhead	SMA	Male	Straight	Standard
141-8SMNM+	18	0.86	0.67	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
141-8SMR+	18	0.51	0.67	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-8SMRSM+	18	0.7	0.67	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-9SM+	18	0.55	0.75	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141-9SMR+	18	0.58	0.75	SMA	Male	Right Angle 0° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-9SMRC+	18	0.72	0.75	SMA	Male	Right Angle 180° Clock	Standard	SMA	Male	Right Angle 0° Clock	Standard
141-9SMRSM+	18	0.72	0.75	SMA	Male	Straight	Standard	SMA	Male	Right Angle 0° Clock	Standard
K086-12SMCX1+	6	0.34	1	MCX	Male	Straight	Standard	SMA	Male	Straight	Standard
K086-8SMCX1+	6	0.25	0.67	MCX	Male	Straight	Standard	SMA	Male	Straight	Standard

Conformable Hand-Flex, Non-Magnetic: semi-rigid replacement

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
141N-10CSM	18	0.55	0.33	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141N-10CSM PMSM	6	0.5	0.33	SMP	Male	Straight	Standard	SMA	Male	Straight	Standard
141N-20CSM	18	0.79	0.66	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141N-20CSM PMSM	6	0.61	0.66	SMP	Male	Straight	Standard	SMA	Male	Straight	Standard
141N-30CSM	18	1.03	0.98	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141N-30CSM PMSM	6	0.74	0.98	SMP	Male	Straight	Standard	SMA	Male	Straight	Standard
141N-50CSM	18	1.5	1.64	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
141N-50CSM PMSM	6	0.99	1.64	SMP	Male	Straight	Standard	SMA	Male	Straight	Standard
86N-10CSM	18	1.8	0.33	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
86N-10CSM PMSM	18	1.01	0.33	SMPM	Male	Straight	Standard	SMA	Male	Straight	Standard

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
86N-10CSSM PMSM	18	1.01	0.33	SSMP	Male	Straight	Standard	SMA	Male	Straight	Standard
86N-20CSM	18	1.16	0.66	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
86N-20CSM PMSM	18	1.16	0.66	SMPM	Male	Straight	Standard	SMA	Male	Straight	Standard
86N-20CSSM PMSM	18	1.16	0.66	SSMP	Male	Straight	Standard	SMA	Male	Straight	Standard
86N-30CSM	18	1.52	0.98	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
86N-30CSM PMSM	18	1.76	0.98	SMPM	Male	Straight	Standard	SMA	Male	Straight	Standard
86N-30CSSM PMSM	18	1.76	0.98	SSMP	Male	Straight	Standard	SMA	Male	Straight	Standard
86N-50CSM	18	2.24	1.64	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
86N-50CSM PMSM	18	2.51	1.64	SMPM	Male	Straight	Standard	SMA	Male	Straight	Standard
86N-50CSSM PMSM	18	2.51	1.64	SSMP	Male	Straight	Standard	SMA	Male	Straight	Standard

Standard Flexible: cable assemblies for interconnection

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
FL086-12-35M+	26.5	1.2	1	3.5mm	Male	Straight	Standard	3.5mm	Male	Straight	Standard
FL086-12KM+	40	1.5	1	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
FL086-12NM+	18	0.6	1	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
FL086-12SM+	18	0.9	1	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
FL086-12SMMCR+	6	0.7	1	SMA	Male	Straight	Standard	MCX	Male	Right Angle 0° Clocked	Standard
FL086-12SMNM+	18	0.7	1	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
FL086-24NM+	18	1.4	2	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
FL086-24SM+	18	1.5	2	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
FL086-24SMNM+	18	1.4	2	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
FL086-3KM+	40	0.5	0.25	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
FL086-4KM+	40	0.6	0.33	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
FL086-6-35M+	26.5	0.6	0.5	3.5mm	Male	Straight	Standard	3.5mm	Male	Straight	Standard

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
FL086-6KM+	40	0.8	0.5	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
FL086-6NM+	18	0.3	0.5	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
FL086-6SM+	18	0.4	0.5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
FL086-6SMNM+	18	0.3	0.5	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
FL086-9SM+	18	0.64	0.75	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
FL141-12NM+	18	0.4	1	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
FL141-12SM+	18	0.5	1	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
FL141-12SMNM+	18	0.4	1	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
FL141-24NM+	18	0.9	2	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
FL141-24SM+	18	1	2	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
FL141-24SMNM+	18	0.9	2	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
FL141-6NM+	18	0.2	0.5	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
FL141-6SM+	18	0.3	0.5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
FL141-6SMNM+	18	0.2	0.5	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
FL141-9SM+	18	0.37	0.75	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
FL47-12KM+	40	2.7	1	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
FL47-12KMVM+	40	2.8	1	2.92 mm	Male	Straight	Standard	2.4 mm	Male	Straight	Standard
FL47-12SSMP+	40	2.7	1	SMPM	Female	Straight	Standard	SMPM	Female	Straight	Standard
FL47-12SSMPKM+	40	2.7	1	SMPM	Female	Straight	Standard	2.92 mm	Male	Straight	Standard
FL47-12SSMPVM+	40	2.8	1	SMPM	Female	Straight	Standard	2.4 mm	Male	Straight	Standard
FL47-12VM+	50	3.2	1	2.4 mm	Male	Straight	Standard	2.4 mm	Male	Straight	Standard
FL47-6KM+	40	2.1	0.5	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
FL47-6KMVM+	40	1.2	0.5	2.92 mm	Male	Straight	Standard	2.4 mm	Male	Straight	Standard
FL47-6SSMP+	40	2.5	0.5	SMPM	Female	Straight	Standard	SMPM	Female	Straight	Standard
FL47-6SSMPKM+	40	2.36	0.5	SMPM	Female	Straight	Standard	2.92 mm	Male	Straight	Standard
FL47-6SSMPVM+	40	2.36	0.5	SMPM	Female	Straight	Standard	2.4 mm	Male	Straight	Standard
FL47-6VM+	50	2.36	0.5	2.4 mm	Male	Straight	Standard	2.4 mm	Male	Straight	Standard
FL86-12KMVM+	40	1.6	1	2.92 mm	Male	Straight	Standard	2.4 mm	Male	Straight	Standard
FL86-12SMP+	26.5	1.45	1	SMP	Female	Straight	Standard	SMP	Female	Straight	Standard

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
FL86-12SMPKM+	33	1.46	1	SMP	Female	Straight	Standard	2.92 mm	Male	Straight	Standard
FL86-12SMPVM+	33	1.45	1	SMP	Female	Straight	Standard	2.4 mm	Male	Straight	Standard
FL86-12SSMP+	40	1.86	1	SMPM	Female	Straight	Standard	SMPM	Female	Straight	Standard
FL86-12SSMPKM+	40	1.79	1	SMPM	Female	Straight	Standard	2.92 mm	Male	Straight	Standard
FL86-12SSMPSMP+	33	1.45	1	SMPM	Female	Straight	Standard	SMP	Female	Straight	Standard
FL86-12SSMPVM+	40	1.81	1	SMPM	Female	Straight	Standard	2.4 mm	Male	Straight	Standard
FL86-12VM+	50	1.96	1	2.4 mm	Male	Straight	Standard	2.4 mm	Male	Straight	Standard

Phase Stable, Flexible: test and measurement stable cable assemblies

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
CBN-1.5FT-SMSM+	26.5	1	1.5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-1.5M-SMSM+	26.5	3.2	4.9	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-10FT-SMSM+	26.5	6.3	10	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-15FT-SMSM+	26.5	9.4	15	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-1FT-NMNM+	18	0.3	1	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
CBN-1FT-SMSM+	26.5	0.8	1	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-1FT-TMTM+	18	0.5	1	TNC	Male	Straight	Standard	TNC	Male	Straight	Standard
CBN-1M-SMSM+	26.5	3.3	3.3	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-2FT-SMSM+	26.5	1.4	2	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-2M-SMSM+	26.5	6	6.6	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-3.5FT-SMSM+	26.5	2.3	3.5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-3FT-NMNM+	18	0.8	3	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
CBN-3FT-SMSM+	26.5	2.1	3	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-3FT-TMTM+	18	1.4	3	TNC	Male	Straight	Standard	TNC	Male	Straight	Standard
CBN-4FT-SMSM+	26.5	2.5	4	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-5FT-SMSM+	26.5	3.5	5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
CBN-6FT-NMNM+	18	1.6	6	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
CBN-6FT-SMSM+	26.5	3.8	6	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-6FT-TMTM+	18	2.4	6	TNC	Male	Straight	Standard	TNC	Male	Straight	Standard

Temperature Stable, Flexible: test and measurement temperature cable assemblies

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
TMP40-1M-KMKM+	40	2.6	3.28	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
TMP40-3FT-KMKM+	40	2.4	3	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
TMP40-6FT-KMKM+	40	4.6	6	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard

Test and Measurement: general purpose cable assemblies

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
APC-10FT-NMNM+	18	6.3	10	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
APC-15FT-NMNM+	18	9	15	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
APC-4FT-SMNM+	18	2.55	4	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
APC-6FT-NMNM+	18	3.8	6	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
CBN-1.5FT-SMSM+	26.5	1	1.5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-1.5M-SMSM+	26.5	3.2	4.9	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-10FT-SMSM+	26.5	6.3	10	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-15FT-SMSM+	26.5	9.4	15	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-1FT-NMNM+	18	0.3	1	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
CBN-1FT-SMSM+	26.5	0.8	1	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-1FT-TMTM+	18	0.5	1	TNC	Male	Straight	Standard	TNC	Male	Straight	Standard
CBN-1M-SMSM+	26.5	3.3	3.3	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-2FT-SMSM+	26.5	1.4	2	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-2M-SMSM+	26.5	6	6.6	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
CBN-3.5FT-SMSM+	26.5	2.3	3.5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-3FT-NMNM+	18	0.8	3	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
CBN-3FT-SMSM+	26.5	2.1	3	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-3FT-TMTM+	18	1.4	3	TNC	Male	Straight	Standard	TNC	Male	Straight	Standard
CBN-4FT-SMSM+	26.5	2.5	4	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-5FT-SMSM+	26.5	3.5	5	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-6FT-NMNM+	18	1.6	6	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
CBN-6FT-SMSM+	26.5	3.8	6	SMA	Male	Straight	Standard	SMA	Male	Straight	Standard
CBN-6FT-TMTM+	18	2.4	6	TNC	Male	Straight	Standard	TNC	Male	Straight	Standard
KBL-1.5FT-LOW+	40	1.41	1.5	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
KBL-1M-LOW+	40	3.05	3.28	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
KBL-2FT-LOW+	40	1.74	2	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
KBL-2M-LOW+	40	5.46	6.56	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
KBL-4FT-LOW+	40	3.41	4	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
TMP40-1M-KMKM+	40	2.6	3.28	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
TMP40-3FT-KMKM+	40	2.4	3	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
TMP40-6FT-KMKM+	40	4.6	6	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
WBL-0.5FT-W1F+	110	2.5	0.5	1.0mm	Female	Straight	Standard	1.0mm	Female	Straight	Standard
WBL-0.5FT-W1M+	110	2.5	0.5	1.0mm	Male	Straight	Standard	1.0mm	Male	Straight	Standard
WBL-0.5FTW1F1M+	110	2.5	0.5	1.0mm	Female	Straight	Standard	1.0mm	Male	Straight	Standard
WBL-1FT-W1F+	110	4.5	1	1.0mm	Female	Straight	Standard	1.0mm	Female	Straight	Standard
WBL-1FT-W1F1M+	110	4.5	1	1.0mm	Female	Straight	Standard	1.0mm	Male	Straight	Standard
WBL-1FT-W1M+	110	4.5	1	1.0mm	Male	Straight	Standard	1.0mm	Male	Straight	Standard

Temperature Stable, Flexible: test and measurement temperature cable assemblies

Model No	Max Freq (GHz)	IL (dB)	Length (ft)	Conn1 Type	Conn1 Gender	Conn1 Orientation	Conn1 Mount	Conn2 Type	Conn2 Gender	Conn2 Orientation	Conn2 Mount
APC-10FT-NMNM+	18	6.3	10	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
APC-15FT-NMNM+	18	9	15	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
APC-4FT-SMNM+	18	2.55	4	N-Type	Male	Straight	Standard	SMA	Male	Straight	Standard
APC-6FT-NMNM+	18	3.8	6	N-Type	Male	Straight	Standard	N-Type	Male	Straight	Standard
KBL-1.5FT-LOW+	40	1.41	1.5	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
KBL-1M-LOW+	40	3.05	3.28	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
KBL-2FT-LOW+	40	1.74	2	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
KBL-2M-LOW+	40	5.46	6.56	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
KBL-4FT-LOW+	40	3.41	4	2.92 mm	Male	Straight	Standard	2.92 mm	Male	Straight	Standard
WBL-0.5FT-W1F+	110	2.5	0.5	1.0mm	Female	Straight	Standard	1.0mm	Female	Straight	Standard
WBL-0.5FT-W1M+	110	2.5	0.5	1.0mm	Male	Straight	Standard	1.0mm	Male	Straight	Standard
WBL-0.5FTW1F1M+	110	2.5	0.5	1.0mm	Female	Straight	Standard	1.0mm	Male	Straight	Standard
WBL-1FT-W1F+	110	4.5	1	1.0mm	Female	Straight	Standard	1.0mm	Female	Straight	Standard
WBL-1FT-W1F1M+	110	4.5	1	1.0mm	Female	Straight	Standard	1.0mm	Male	Straight	Standard
WBL-1FT-W1M+	110	4.5	1	1.0mm	Male	Straight	Standard	1.0mm	Male	Straight	Standard



Direct Sales

Brooklyn, NY

sales@minicircuits.com
+1 (718) 934 4500

Missouri

sales@minicircuits.com
+1 (417) 335-5935

Europe

sales@uk.minicircuits.com
+44 1252-832600

India

Akilan.Krishnan@minicircuits.com
+ 91 97319 22544

Taiwan

Jimmy.Chen@minicircuits.com
+886 3 318 4450

Japan and South Korea

thomasj@minicircuits.com
+81 45 548 5058

Technical Support

North America

apps@minicircuits.com
+1 (718) 934-4500

Southeast Asia

foxfoo@minicircuits.com.my
+604 646-2828

Taiwan and Philippines

Jimmy.Chen@minicircuits.com
+886 3 318 4450

Europe

apps@uk.minicircuits.com
+44 1252-832600

India

Akilan.Krishnan@minicircuits.com
+ 91 97319 22544

Israel

app@ravon.co.il
+972 4 8749100

China

yuanzhong@minicircuits.com
+86 020-8734 0992

Japan and South Korea

thomasj@minicircuits.com
+81 45 548 5058

minicircuits.com