

Figure 437 - Cyclone, Open 180°

Difficulty 2.6


From a **Back Layout Position** *a Bent Knee Surface Arch Position is assumed.* The legs are simultaneously lifted to a **Vertical Position** as a *Twirl* is executed. Continuing in the same direction the legs are opened symmetrically to a **Split Position** as a 180° rotation is executed. A *Walkout Front* is executed.




FINA WEIGHT for Cyclone, Open 180°

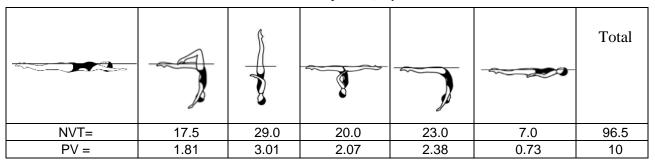


BM15 To Assume a Bent Knee Surface Arch Position

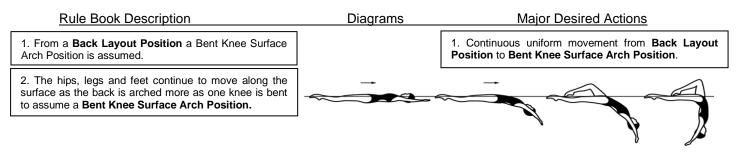

Bent Knee Surface Arch Position to Vertical Position with Twirl

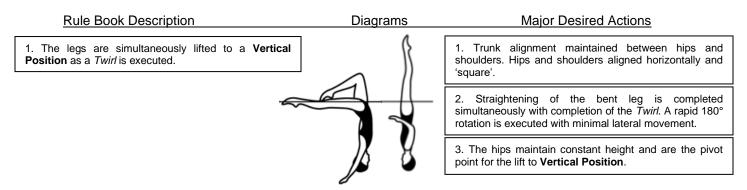

Vertical Position to Split Position (Open 180°)

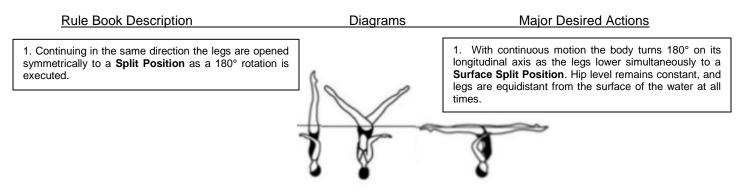

BM 6a Walkout Front

Rule Book Description	Diagrams	Major Desired Actions	
1. These movements start in a Split Position unless otherwise specified in the figure description. The hips remain stationary as one leg is lifted in an arc over the		1. Hip height remains constant and at the surface of the water.	
surface to meet the opposite leg.		2. Arcing leg moves continuously with uniform motion.	
2. The front leg is lifted in a 180° arc over the surface to meet the opposite leg in a Surface Arch Position and		3. Both legs maintain full extension.	
with continuous movement, an Arch to Back Layout Finish Action is executed.		4. Trunk maintains same position until the feet join.	
	_	5. No pause in Surface Arch Position , however an accurate Surface Arch Position must be evident before the body begins to rise and straighten.	
		6. Foot first surfacing motion begins when the feet are joined.	
e e	e la		

BM 5 Arch to Back Layout Finish Action

Rule Book Description	Diagrams	Major Desired Actions
1. From a Surface Arch Position , the hips, chest and face surface sequentially at the same point, with foot first movement to a Back Layout Position , until the head occupies the position of the hips at the beginning of this action.		1.Sharp arch in lower back. The body straightens, rises and moves along the surface simultaneously, with a stationary Back Layout Position achieved as the face surfaces. Full body extension maintained throughout.

Height Chart for Cyclone, Open 180°

/								
Water Levels	Perfect	Excellent/Near Perfect	Very Good	Good	Competent	Satisfactory	Deficient	Weak
Score	10	9.5	8.5	7.5	6.5	5.5	4.5	3.5
Bent Knee Surface Arch	Above crotch	Crotch level	Upper thigh	Mid-thigh	Low thigh (well above kneecap)	Kneecap	(5.0) Only top of knee	(4.5) Below surface
Double Leg Vertical	Crotch level or higher	Upper thigh	Upper mid-thigh	Low to mid- thigh	Above kneecap	Kneecap	Below kneecap	Well belove kneecap (mid-shin)

Height Chart for Surface Split Position


Score range		Angle of Split (degree)		Water level
Excellent/ Near Perfect	9.5	180 (flat)		Crotch & legs dry
Very Good	8.5	170 - 180		Legs dry
Good	7.5	160 - 170		Legs almost dry
Competent	6.5	150 - 160		lower legs dry Crotch underwater
Satisfactory	5.5	130 - 140		lower legs dry Crotch underwater
Deficient	4.5	110 - 120		feet above the surface, legs under water
Weak	3.5	up to 100	>=1	feet come out vertically
Hardly recognisable	0.1 – 2.9	scissors	Y	feet come out vertically

Deduction Guidelines for Cyclone, Open 180°

Figure/Transition	Small Deviation – 0.2 1-15 degrees	Medium Deviation – 0.5 16-30 degrees	Large Deviation – 1.0 31 degrees or more
Twirl from Bent Knee Surface Arch Position to Vertical Position		Slow Twirl, not changed speed obvious	Very slow Twirl (twisting not twirling)
180° open rotation from Vertical Position to Split Position	Uneven open between right and left legs		

Split Position	*See chart for splits		
Travel Deduction Guidelines	Small deduction: 0.1	Medium deduction: 0.3	Large deduction: 0.5
	Minimal travel or minimal lack of required travel	Obvious travel in one (1) transition, and or/ travel in several transitions	Obvious travel in two (2) or more transitions and or travel throughout

Visible scales of angle deviation



Apply to plumb line points of reference when evaluating vertical and horizontal alignments required.				
Small deviation	1-15 degrees	0.2		
Medium deviation	16-30 degrees	0.5		
Large deviation	31 degrees or more	1.0		

