


# FOR ALL PRIVATE AND PUBLIC RESIDENTIAL DEVELOPMENT WITH GUARDBOUSES OR ELECTRONIC ENTRANCES

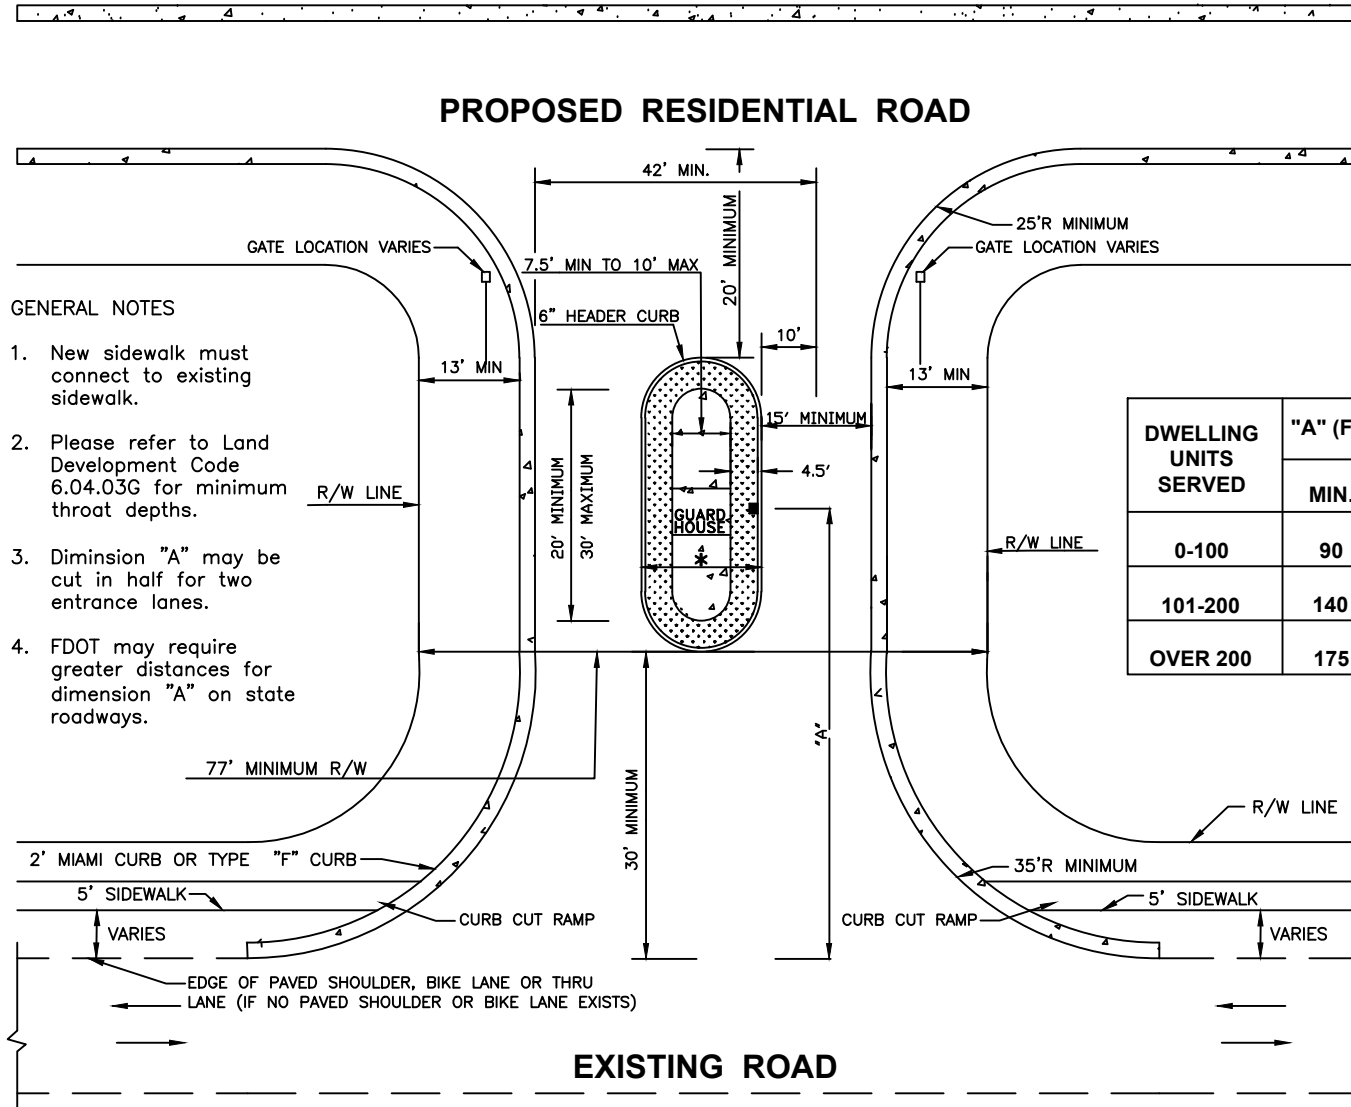

## GENERAL NOTES

1. New sidewalk must connect to existing sidewalk.
2. Please refer to Land Development Code 6.04.03G for minimum throat depths.
3. Dimension "A" may be cut in half for two entrance lanes.
4. FDOT may require greater distances for dimension "A" on state roadways.

## FOR PUBLIC RESIDENTIAL DEVELOPMENTS

1. Communities desiring to place guardhouses and/or gates within public right-of-way must obtain right-of-way use permit and enter into a construction and maintenance agreement with the County. Any such guardhouse shall be unmanned and for ornamental purposes only. Gates must be for ornamental purposes only, fixed in an open position, and shall not be located within the clear zone area.
2. \* Minimum width of median containing a guardhouse shall be 16.5'. Minimum width of median without a guardhouse shall be 10'.
3. There shall be no stop bars or other stop controls at guardhouses within public rights-of-way.

DWELLING UNITS SERVED	"A" (Ft.)
	MIN.
0-100	90
101-200	140
OVER 200	175

## PRIVATE GATED DEVELOPMENTS

1. Private gated developments shall provide adequate space for a single unit 30-foot truck to make a U-Turn. This minimum outside distance is 42'. This U-Turn area shall be between the electronic entrance device and entrance gate.
2. The distance "A" in the table shall be measured from the stop bar at the guardhouse or from the electronic entry devices, inclusive of any entry control features.
3. \* Minimum width of median for the Electronic Entry Device is 4 feet.

REVISION DATE:

10/17

**TRANSPORTATION  
TECHNICAL  
MANUAL**



**Hillsborough  
County Florida**

**ENTRANCE MEDIAN, GUARDHOUSE  
AND ELECTRONIC ENTRY  
TYPICAL DETAILS**

DRAWING NO. **TD-9**

SHEET NO. 1 OF 1