


SECTION VIEW

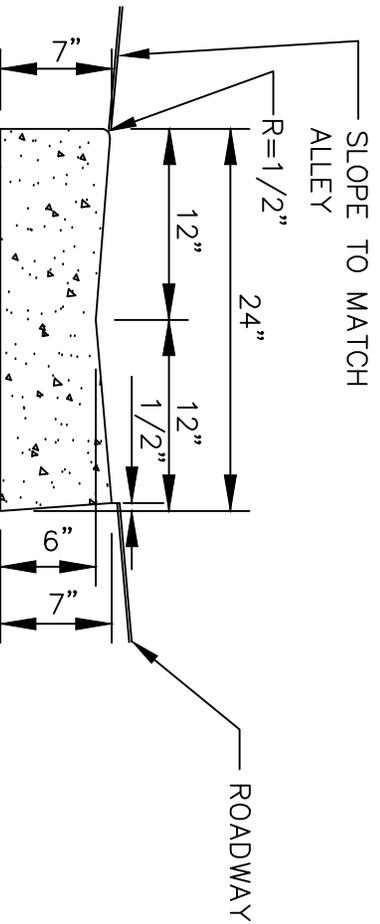

DROP SECTION VIEW AT ALLEY

NOTES:

1. WHEN REMOVING EXISTING CURB, THE CURB SHALL BE SAW CUT AT THE NEAREST CONSTRUCTION JOINT AND A FULL SECTION OF CURB REPLACED.
2. INSTALL EXPANSION JOINTS AT 50' INTERVALS, STRIKE CONSTRUCTION JOINTS AT 10' INTERVALS.

DRAWING NO. TD-5

SHEET NO. 1 OF 3

MIAMI CURB SECTION
TYPICAL DETAILS

Hillsborough
County Florida



TRANSPORTATION
TECHNICAL
MANUAL

REVISION DATE: