


Comfort Shield

High-performance product designs for convenient, everyday protection and comfort.



AVAILABLE IN THESE WINDOW & PATIO DOOR STYLES:



Special shapes also available

• Multichambered frame

Our vinyl frame has up to 18 insulating air chambers inside — significantly more than ordinary vinyl – to keep homes more comfortable year-round.

Weather-resistant design

Multichambered frame and fully welded sash improve strength and thermal performance, reduce sound transmission and outperform the industry requirements for air infiltration by 53%.¹ Vinyl window sashes with optional performance upgrades are metal-reinforced, creating a window that's extra sturdy and wind-resistant.

Unique weather-repel system

Protect homes with our unique weather-repel system on single- and double-hung windows. It has three points of protection to channel water away from the home — including triple weatherstripping.

Fade-resistant vinyl formula

CWS vinyl uses a fade-resistant formula that is performance tested for excellent weathering, durability and color retention. Our high-grade vinyl resists yellowing and never needs painting and the solid color throughout the vinyl keeps minor dings and scratches virtually invisible.

Strong and sturdy frames

Our precision welding process creates more durable products that resist warping or twisting over time. CWS Comfort Shield window frames are 52% stronger than ordinary vinyl.² Increase energy performance and structural strength with optional performance enhancements such as foam insulation and steel reinforcement.

Long-lasting glass seal

CWS' premium sealant process helps prevent fogging between the panes of insulating glass. The Low-E coating is removed where the glass meets the sealant. This extra step helps reduce the possibility of the glass seal failing — so you can depend on CWS Comfort Shield windows to give years of exceptional energy efficiency and comfort.

Testing beyond requirements

Choose CWS Comfort Shield windows with confidence. At CWS, our products are tested to meet or exceed industry requirements, testing not only the entire window for strength and durability, but individual parts as well. Ensuring long-lasting performance to reduce call-backs for you.

Enhanced security and privacy features

Give your customers more peace of mind with security and privacy features including a tamper prevention system on single- and double-hung windows and between-the-glass blinds on sliding patio doors.

Limited lifetime warranty

CWS products are backed by some of the strongest warranties in the business. See written limited warranty for details, including exceptions and limitations, at cws.cc/resources/warranties.

	MIN.	MIN.	MAX.	MAX.	PERFORMANCE		RFORMANCE VALU		7		
WINDOW & PATIO DOOR STYLES	WIDTH	HEIGHT	WIDTH	HEIGHT	CLASS & GRADE	U-FACTOR	SHGC	STC	FRAME / INSTALL	Grilles Types	Grilles are color-matched
AWNING Dual-Pane Vent	16"	14-1⁄2"	59-1⁄2"	43-1⁄2"	LC35-LC50	0.26-0.30	0.17-0.43	30		21	Grilles-Between-the-Glass:
AWNING Triple-Pane Vent	16"	14-1⁄2"	59-1⁄2"	43-1⁄2″	LC35-LC50	0.20-0.25	0.19-0.37	34			
CASEMENT Dual-Pane Vent	14-1/2"	17-1/2"	35-1⁄2"	71-1/2"	LC35-LC50	0.26-0.30	0.17-0.43	30-33			
CASEMENT Triple-Pane Vent	14-1/2"	17-1/2"	35-1/2"	71-1/2"	LC35-LC50	0.20-0.24	0.19-0.37	34	_		Contour 3/4" Flat 5/8
SLIDING WINDOW Dual-Pane Vent	21-1/2"	11-1⁄2"	96"	62"	R25-R50	0.27-0.32	0.20-0.51	25			
SLIDING WINDOW Triple-Pane Vent	21-1/2"	11-1/2"	96"	62"	R25-R50	0.20-0.26	0.22-0.44	28		Grille Patterns	Choose from one of our st
DOUBLE-HUNG Dual-Pane Vent	14-1/2"	23-1⁄2"	53-1⁄2"	86"6	R20-R50	0.27-0.33	0.19-0.49	26	Block Frame Integral Fin		
DOUBLE-HUNG Triple-Pane Vent	14-1/2"	23-1/2"	53-1⁄2"	78"	R25-R50	0.21-0.27	0.21-0.42	28	Fin with J-Channel 5/8" Flange Frame		
SINGLE-HUNG Dual-Pane Vent	14-1⁄2"	23-1⁄2"	53-1⁄2"	84"	R35-R50	0.27-0.33	0.20-0.51	25			6-Lite 9-Lite
SINGLE-HUNG Triple-Pane Vent	14-1⁄2"	23-1⁄2"	53-1⁄2"	77-1⁄2"	R35-R50	0.21-0.26	0.22-0.44	28		Window Hardware	Prairie Prairie
FIXED FRAME RECTANGLE Dual-Pane	11-1⁄2"	11-1⁄2"	108" 40 sq. ft. max.	108" 40 sq. ft. max.	CW30-CW50	0.26-0.31	0.21-0.58	26			
FIXED FRAME RECTANGLE Triple-Pane	11-1⁄2"	11-1⁄2"	108" 40 sq. ft. max.	108" 40 sq. ft. max.	CW30-CW50	0.19-0.24	0.24-0.47	27		Casement & Awning	Our casement and awning roomside window treatme
SLIDING PATIO DOOR Dual-Pane, OX or XO ³	46-1⁄2"	70-1⁄2"	95-1/2"	95-1/2"	LC35 - LC50	0.27-0.40	0.19-0.49	26			
SLIDING PATIO DOOR Triple-Pane, OX or XO ³	46-1⁄2"	70-1⁄2"	95-1⁄2"	95-1/2"	LC35 - LC50	0.22-0.30	0.21-0.42	27)
Colors & Finishes											Fold-Away Crank
rame Color		-	look with a es virtually i		Sliding, Single- & Double-Hung	AutoLock hardware autom and confirm it latches.					
	Solid-Co	olors:									
	White		Almond		Fossil						AutoLock
Glass Options										Integrated Sash Lift	Make raising and lowering integrated sash lift.
Low-E Glass⁴	Our gla	ass collectic	on offers ene	ergy saving	choices to keep	your home c	omfortable	year-round			
	~										

ck

rated sash lift.



Integrated Sash Lift

Window Limited

Opening Devices



Vent Stop & Opening Control Device

Additional glass options provide added benefits, such as more strength, improved energy efficiency or additional design options.



Bronze-tinted Low-E 270 insulating glass with argon ⁴

Low-E 270 insulating

dual- or triple-pane

glass with argon

Obscure Low-E insulating glass with argon ⁵

Low-E 366 insulating

dual-pane glass

with argon

Tempered Glass

Additional


Glass Options

are color-matched to your window or patio door interior and exterior frame color.



Flat 5/8'

se from one of our standard grille patterns or create a unique look with custom patterns.⁶

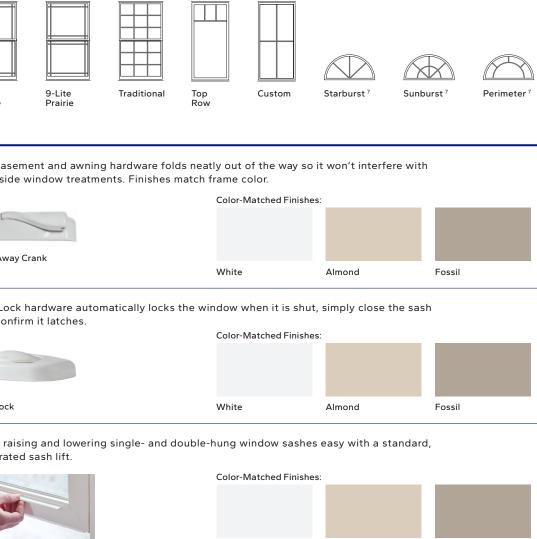


Almond

Fossil


White

A vent stop can be engaged or disengaged manually and restricts how far the bottom sash of a double-hung window can open. A window opening control device (WOCD) complies with a safety standard and allows for ventilation, emergency escape and rescue when released. A WOCD automatically limits the sash opening to less than four inches, unless it is intentionally disengaged, enabling the sash to fully open.



High-Quality Fiberglass Screen CWS 18x16 high transparency screens come standard and provide a clearer view than conventional fiberglass screens.

Patio Door Hardware

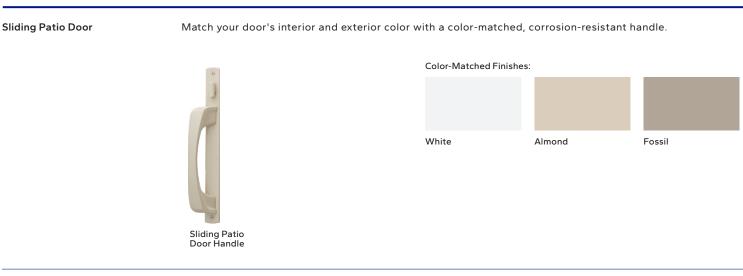


Secure Footbolt

Our footbolt is flush with the frame, providing secondary venting and locking abilities without compromising beauty.



Flush Footbolt



Blinds-Between-the-Glass⁹

Sliding Patio Door

Add privacy and complement a home's decor with blinds-between-the-glass. Located between panes of glass, blinds are protected from dust, pets and damage.

1	

White

- ¹ Based on WDMA Hallmark requirements using NFRC model-size windows.
- ² Based on the force required to bend a window frame profile.
- ³ Additional configurations available. Contact your local Pella expert for details.
- ⁴ Optional high-altitude Low-E insulating glass available with or without argon on select products.
- ⁵ Available in both dual-pane and triple-pane glass.
- ⁶ Grille patterns offered may vary per product. See specific product information for availability.
- ⁷ Only available with a curved product or curved glass.
- ⁸ Warning: Screens will not stop children or pets from falling out of window or door. Keep child or pet away from open window or door.
- ⁹ Available on dual-pane products in select sizes only. Not available on sliding patio doors with grilles-between-the-glass.

NOTE: Product specifications may change without notice.

Actual colors may vary from those shown and products may vary slightly from illustrations and photos