


# Raised Bed Watering Kit

This kit is ideal for watering one raised bed up to 30' long or two 12' long beds. Covers 180 sq.ft. The spectrum spikes give a full-circle vortex spray of fine water droplets. The flow is fully adjustable by turning the cap. Consumes up to 100 gph based on 20 psi. For use with plants 12" or shorter.

## Each Kit Contains:

1/2" × 50' of Poly Header Hose	(XC251)
1/4" × 50' of Poly Feeder Tube	(XC307)
(1) 1/2" Hose/Faucet Connector	(XC237)
(5) Spectrum Spikes	(XC421)
(1) 1/2" Compression End	(XC232)
(1) Hole Punch	(XC459)

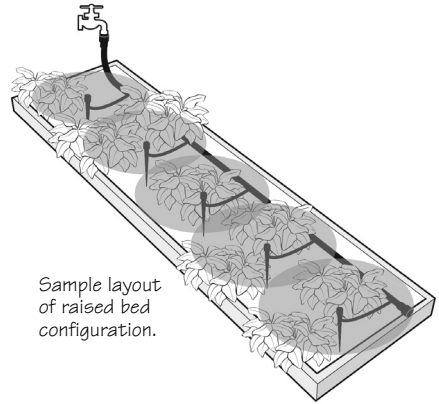

## Installation is Easy

1. Lay out the main header hose in the area you want to water.
2. Punch holes along the main header hose where you want to insert feeder tubes.
3. Twist the connectors off the spectrum spikes and push them into the holes on the main header hose.
4. Position the spectrum spikes in your garden. Cut the feeder tube into sections and attach a section to each connector in the main header hose and to a spectrum spike.
5. Attach the hose/faucet connector to one end of the main header hose and the compression end to the other end. The faucet connector can then be attached to a faucet or a garden hose.

**Note:** *Do not use this system without the filter washer in place in the faucet connector; otherwise, the system will plug up and stop working.*