

2 BAY TOOLBOX DRAWER LIGHTING

INSTALLATION INSTRUCTIONS

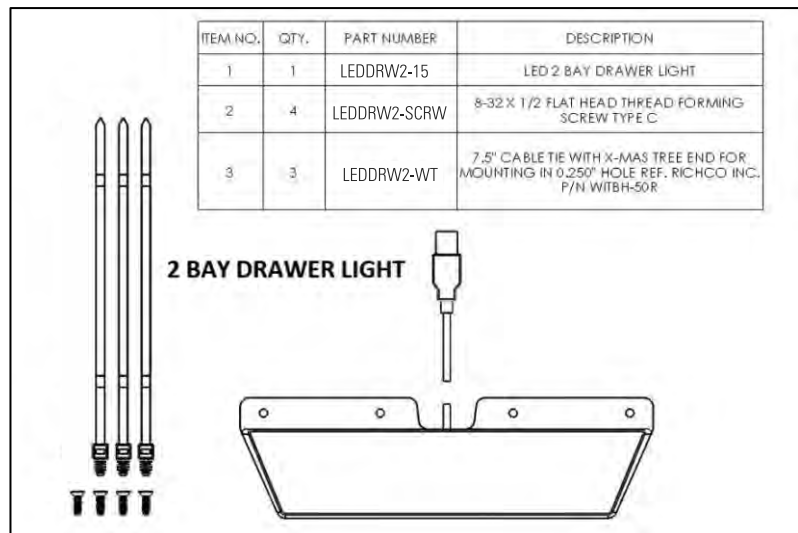


Figure 1 - Two bay toolbox drawer light kit

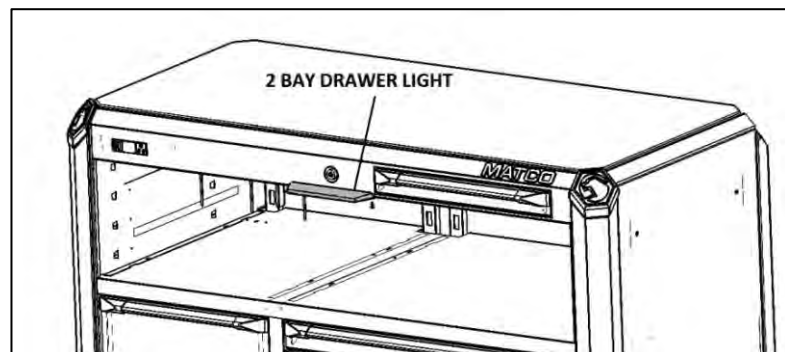



Figure 2- Drawer light is centered in case and installs into preset mounting holes in the case

Installation Instructions:

1. Remove top drawers. Note - installation may also be performed without removing drawers if preferred.
2. Locate mounting holes on the case above the top drawer. There are 4 holes in the center of the case (see fig. 3).
3. Attach drawer light modules using #8-32 thread forming flat head screws included in the kit (qty. 4 per module).
4. Do not over tighten screws.

2 BAY TOOLBOX DRAWER LIGHTING

INSTALLATION INSTRUCTIONS

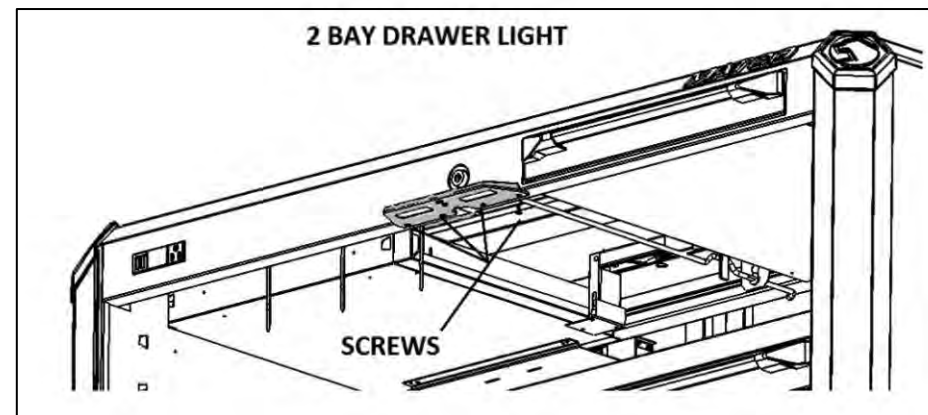

5. Push cable ties into holes on inside of toolbox. Holes are located inside the toolbox per diagram.
6. Route power cables and plug USB power cable into backside of USB outlet.

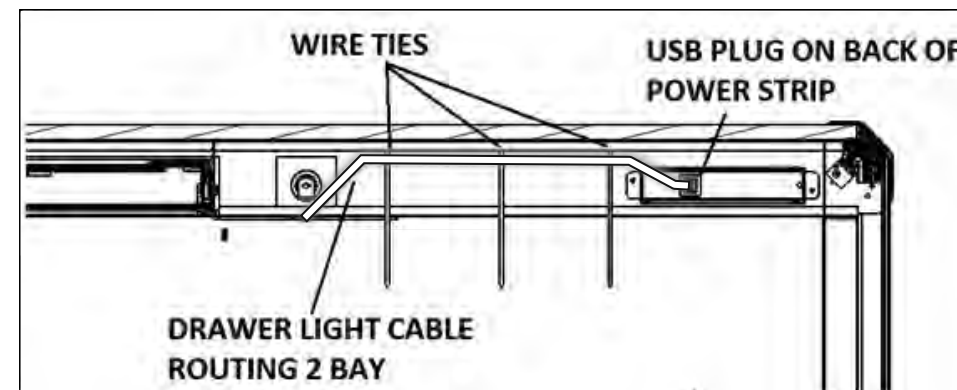


Figure 4 - Reverse view front of toolbox showing wire tie and USB locations

7. Finish cable routing using cable wire ties.
8. Plug the male USB into the back of the power strip USB port on the front of the toolbox.
9. Bundle up any excess cable and tighten cable ties around wire.
10. Trim cable ties.

SWITCH FUNCTIONS

The toolbox drawer light switch has three functions:

- Push once – activates sensor (on-off)
 - Pushing once turns on light for 3 minutes then auto off. Swipe sensor to turn on again for 3 minutes.
- Push twice - turns light on constant
- Push three times - turns light off and sensor off