15W COB
Rechargeable Worklight

NEW!

CE RoHs





160° rotating magnetic base



Light bulbs pivot independently to direct light as needed



USB charging port with LED charge indicators





The new super bright Under-hood Light for powerful illumination of the entire engine bay. Shines brighter, grips stronger & outlasts most other lights!

15W COB Under-hood Light
3 powerful COB lamps of 5W each


Light Output
Single button, user controlled light output for maximized operating time. Choose between three light sittings-high, medium & low

	INTENSITY		
	HIGH	MEDIUM	LOW
NR. OF LAMPS USED	3	2	1
LUMEN	1000	700	350
RUN TIME	6 hours	10 hours	15 hours

Sturdy Construction
a. Aluminium extruded body with ABS coating. Built to withstand the toughest of job site conditions
b. 3 light bulbs with sturdy polycarbonate lens to withstand the toughest of job site conditions
c. Fully adjustable light head: bulbs can be rotated 40° to provide the optimum light angle depending upon job need

Strong Magnetic Base
Built with Multi Angle 0-160 Degree bracket with strong magnet for use on 2/4 post lifts & other places in the garage

Power Source



Rechargeable Battery
3.7V 10400 mAh

Charging of Battery
Battery can be recharged using in-built USB charging port protected by rubber bezel

Complete with USB cable and AC Power Adaptor

Charging Time
7-8 hours

FEATURES

MAX. LUMEN	BEAM ANGLE	OPERATING TEMPERATURE
		−5°C TO 40°C (−23°F TO 104°F)

SIZE (L×H×D)	
(INCH)	(MM)
39-3/4 × 2-1/2 × 2-3/4	1010 × 66 × 70


SAFETY INFORMATION

- Keep the work area clean and dry. Damp or wet work areas can result in injury.
- Check for damaged parts and any other conditions that may affect the operation of this product. Replaced damaged parts immediately
- Do not use the lamp in the immediate vicinity of inflammable materials or gases.
- Only use the accessories included with the product.
- Keep the lamp out of reach of unauthorized persons, especially children.
- Do not point the light directly in your own or any other person's or animal's eyes.
- Do not attempt to open the battery compartment.

PACKAGE CONTENT

DESCRIPTION	QUANTITY
Light	1
USB cable	1
Adaptor	1
O.I.P.M.	1

NOMENCLATURE

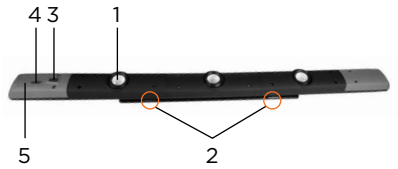

1. 5W COB
2. Adjustable hinge 0-160°
3. Power level button
4. Charging USB port
5. LED's battery status

OPERATING INSTRUCTIONS (Refer "NOMENCLATURE")

Charging:

- Connect the micro USB end of the charging cable to the micro USB port on the work light.
- Insert the USB end of the cable into the USB port to the adaptor.
- Plug the AC adaptor into a live AC outlet. The green LEDs will light, to indicate battery status.
- Charging will take 7-8 hours. When the battery is fully charged, all four LEDs will be lit. When fully charged, unplug from the AC outlet, and then from the work light. The work light is now ready for use.
- Fully charge the battery before the first use.

Operation:

- To switch ON the light press the button at the side of the unit.
- Press the button once to switch on one (center) light.
- Press the button twice to switch on two lights.
- Press the button thrice to switch on all 3 lights.
- Press the button four times to switch off the lights.

MAINTENANCE

- Before cleaning the LED work light, disconnect the USB cable (if being charged) and allow the work light to cool down sufficiently.
- Clean with a dry or slightly moist, clean, lint free cloth and a mild detergent if required.
- Do not use cleaners that contain abrasives or solvents.
- Check the LED work light for damage before each use. If the lens is damaged it must be replaced immediately.
- Clean any dirt from the housing or the lens immediately, since it could cause overheating.

DISPOSAL

The components or the used products must be given to companies that specialize in the disposal and recycling of industrial waste.