MATCO TOOLS


MCL36S

3.6V RECHARGEABLE CORDLESS BIT DRIVER

1. PRODUCT FEATURES

- Designed to remove and install light parts such as headlights, trim and others, by quickly driving fasteners in and out.
- LED spotlight turns on during operation to illuminate working area.
- Quick-release bit holder.
- Designed to automatically stop and lock upon reaching 1.5 lb.ft. (2 N.m) of torque, allowing user to safely continue turning by hand.
- Field serviceable.

Parts function and description:

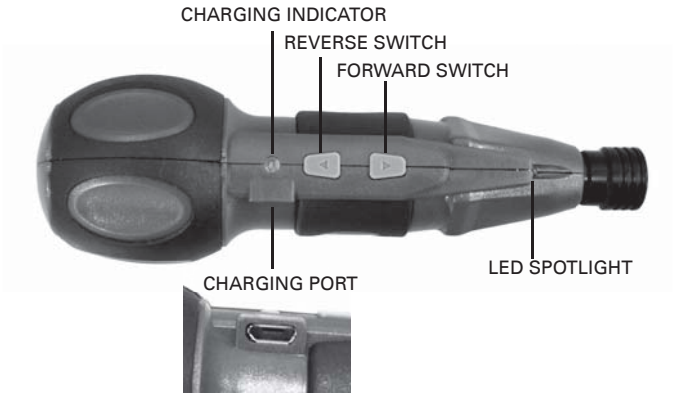

2. TECHNICAL SPECIFICATIONS

- Drive size: 1/4" hex.
- Battery: 3.6V 900 mAh Li-ion battery, rechargeable up to approx. 500 times.
- Electric motor maximum torque: 1.5 lb.ft. (2 N.m)
- Manual maximum torque: 7.5 lb.ft. (10 N.m)
- Free speed: 280 RPM
- Battery life (continuous operation): 40 minutes after full charge
- Full charge time: 60 minutes
- Charging port type: Micro USB
- Charger input: 100-240V – 50/60 Hz 0.2A
- Charger output: 5.0VDC – 1000 mA 5W

3. WARRANTY POLICY

■ Product Warranty

This product is covered by a 1-year warranty against defects in material and/or workmanship. The warranty does not cover items that have been abused, misused, modified, not given proper maintenance and worn out from normal use.

■ Serial Number

Product serial number is located on the side of the housing.
Please consult with your local dealer for warranty claims.



■ Warranty Limitations

During the warranty period, if there is any defect or deficiency related to the product's material or manufacturing process which affects its operation (this excludes external damage and human factor), repair parts and services will be provided (field serviceable).

■ Warranty Exclusions

If any of the following conditions apply, the product's warranty will be voided. These non-normal conditions will require that the customer pays for required repair parts and associated costs determined by the local dealer.

Conditions are listed below:

- Driver has been over torqued and damaged due to usage as a conventional screwdriver, added leverage, removal of rusted and/or jammed fasteners, etc.
- Product has not been purchased from authorized distribution channels and/or proof of purchase cannot be provided.
- Product's serial number has been tampered with or is unclear.
- Customer did not comply with the user's guide resulting in damages due to improper use. In addition, any damages caused by natural disasters (such as floods, fires, earthquakes, hurricanes, lightning, etc.), external factors (liquid filtration, insect or animal damage, etc.) or human factors (surface scratching, dropping, hitting, etc.)
- Surface scratching and abrading of any parts of the product are regarded as normal wear during normal use and therefore considered non-warranty.
- Damages due to modifications or alterations done to the product without authorization, or from abnormality of other equipment.
- Damages during product transportation.
- User attempts to disassemble the device.
- Plastic charging port cap is missing.

Acceptable product warranty conditions are as follow:

- Product does not power on / operate.
- Buttons cannot be operated.
- Product's rotational speed is too low.
- Product does not charge.

4. BEFORE USING THIS PRODUCT

- Fully charge battery for 60 minutes.

5. OPERATION

- This product has been designed to be utilized only as a bit driver for low torque applications (max. manual torque: 7.5 lb.ft.). It must not be used to break loose rusted and/or jammed fasteners or for any kind of high torque applications.
- Place bit in driver and slide holder sleeve outwards to secure bit in place. To switch bit, slide the sleeve outwards and pull bit out.
- Driving fasteners out: With fastener previously loosened, press and hold the reverse button to drive the fastener out.
- Driving fasteners in: Place fastener in position, then press and hold forward button to drive fastener in. Drive fastener in until driver automatically stops, then turn driver by hand to lightly tighten fastener. If more torque is needed, continue with any other hand tool of your choice.

6. CHARGING

- Let driver cool after use, before charging.
- Plug charger to wall outlet and plug micro USB connector in driver's micro USB port, LED charging indicator will light solid red.
- When fully charged, LED charging indicator will turn solid green.
- Do not charge this product with a charger of different specifications. (Please refer to section 2. Technical specifications)

7. WARNINGS AND TIPS

- Do not use any additional tools to add leverage.
- Exceeding the product's maximum torque specification will result in damages.
- Do not strike the product with a hammer or similar tools.
- Do not use any organic solvents to clean the product (alcohol, paint thinner, etc.)
- Avoid contact with water.
- Do not expose the product to high temperatures or high humidity environments.
- Avoid dropping the product.
- Please read guide carefully and follow all instructions before using this product.

Rev.032020
Made in Taiwan
to Matco specifications
2005068-27