

(56)

References Cited

U.S. PATENT DOCUMENTS

6,154,844 A	11/2000	Touboul et al.	8,793,151 B2	7/2014	Delzoppo et al.
6,157,953 A	12/2000	Chang et al.	8,821,242 B2	9/2014	Hinman et al.
6,728,716 B1	4/2004	Bhattacharya et al.	8,839,369 B1	9/2014	Dai et al.
6,804,780 B1	10/2004	Touboul	8,849,880 B2	9/2014	Thelen
6,836,888 B1	12/2004	Basu et al.	8,850,582 B2	9/2014	Endoh et al.
7,076,696 B1	7/2006	Stringer	8,880,435 B1	11/2014	Catlett et al.
7,093,239 B1	8/2006	Van der Made	8,881,282 B1	11/2014	Aziz et al.
7,181,769 B1	2/2007	Keanini et al.	8,893,278 B1	11/2014	Chechik
7,225,468 B2	5/2007	Waisman et al.	8,898,788 B1	11/2014	Aziz et al.
7,299,294 B1	11/2007	Bruck et al.	8,904,527 B2	12/2014	Dawson et al.
7,305,546 B1	12/2007	Miller	8,943,594 B1	1/2015	Arrowood
7,322,044 B2	1/2008	Hrastar	8,949,986 B2	2/2015	Ben-Shalom
7,464,407 B2	12/2008	Nakae et al.	8,959,338 B2	2/2015	Snow et al.
7,530,106 B1	5/2009	Zaitsev et al.	8,973,142 B2	3/2015	Shulman et al.
7,543,269 B2	6/2009	Krueger	8,984,637 B2	3/2015	Karecha et al.
7,546,587 B2	6/2009	Marr et al.	9,009,829 B2	4/2015	Stolfo et al.
7,574,740 B1	8/2009	Kennis	9,027,135 B1	5/2015	Aziz
7,596,807 B2	9/2009	Ptacek et al.	9,043,920 B2	5/2015	Gula et al.
7,596,808 B1	9/2009	Wilkinson et al.	9,117,078 B1	8/2015	Chien et al.
7,710,933 B1	5/2010	Sundaralingam et al.	9,141,792 B2	9/2015	Baluda et al.
7,739,516 B2	6/2010	Bender et al.	9,166,993 B1	10/2015	Liu
7,832,012 B2	11/2010	Huddleston	9,185,136 B2	11/2015	Dulkin et al.
7,882,538 B1	2/2011	Palmer	9,197,601 B2	11/2015	Pasdar
7,890,612 B2	2/2011	Todd et al.	9,213,838 B2	12/2015	Lu
7,937,755 B1	5/2011	Guruswamy	9,225,734 B1	12/2015	Hastings
7,958,549 B2	6/2011	Nakae et al.	9,240,976 B1	1/2016	Murchison
7,984,129 B2	7/2011	Vaught	9,246,774 B2	1/2016	Mataitis et al.
8,015,605 B2	9/2011	Yegneswaran	9,270,690 B2	2/2016	Kraitsman et al.
8,024,795 B2	9/2011	Newton	9,305,165 B2	4/2016	Snow et al.
8,042,186 B1	10/2011	Polyakov et al.	9,329,973 B2	5/2016	Bhuyan
8,065,722 B2	11/2011	Barford et al.	9,330,259 B2	5/2016	Klein et al.
8,078,556 B2	12/2011	Adi et al.	9,356,942 B1	5/2016	Joffe
8,082,471 B2	12/2011	Khan	9,356,950 B2	5/2016	Vissamsetty et al.
8,131,281 B1	3/2012	Hildner et al.	9,369,476 B2	6/2016	Chekina et al.
8,141,154 B2	3/2012	Gruzman et al.	9,386,034 B2	7/2016	Cochenour
8,156,556 B2	4/2012	Krishnamurthy	9,398,001 B1	7/2016	Tidd
8,171,545 B1	5/2012	Cooley et al.	9,407,602 B2	7/2016	Feghali et al.
8,181,033 B1	5/2012	Paul et al.	9,413,721 B2	8/2016	Morris et al.
8,181,250 B2	5/2012	Rafalovich et al.	9,430,646 B1	8/2016	Mushtaq et al.
8,204,984 B1	6/2012	Aziz	9,432,360 B1	8/2016	Triandopoulos et al.
8,205,035 B2	6/2012	Reddy et al.	9,438,614 B2	9/2016	Herz
8,230,505 B1	7/2012	Ahrens et al.	9,495,188 B1	11/2016	Ettema et al.
8,296,842 B2	10/2012	Singh et al.	9,503,470 B2	11/2016	Gertner et al.
8,327,442 B2	12/2012	Herz et al.	9,547,516 B2	1/2017	Thakkar et al.
8,353,033 B1	1/2013	Chen et al.	9,578,045 B2	2/2017	Jarocho et al.
8,370,931 B1	2/2013	Chien et al.	9,591,006 B2	3/2017	Siva et al.
8,375,444 B2	2/2013	Aziz et al.	9,601,000 B1	3/2017	Gruss et al.
8,375,447 B2	2/2013	Amoroso et al.	9,602,531 B1	3/2017	Wallace et al.
8,413,238 B1	4/2013	Sutton	9,606,893 B2	3/2017	Gupta et al.
8,413,241 B2	4/2013	Weeks et al.	9,607,146 B2	3/2017	Sridhara et al.
8,418,250 B2	4/2013	Morris et al.	9,609,019 B2	3/2017	Vissamsetty et al.
8,438,386 B2	5/2013	Hegli et al.	9,628,498 B1	4/2017	Aziz et al.
8,438,626 B2	5/2013	Anderson et al.	9,641,544 B1	5/2017	Treat et al.
8,443,442 B2	5/2013	Wang et al.	9,641,550 B2	5/2017	Kraitsman et al.
8,474,044 B2	6/2013	Zawadowskiy et al.	9,710,648 B2	7/2017	Weingarten
8,488,466 B2	7/2013	Breslin et al.	9,712,547 B2	7/2017	Touboul et al.
8,528,057 B1	9/2013	Garrett	9,769,204 B2	8/2017	Vissamsetty et al.
8,528,087 B2	9/2013	Hsu et al.	9,781,148 B2	10/2017	Mahaffey et al.
8,538,578 B2	9/2013	Battles et al.	9,807,092 B1	10/2017	Gutzmann
8,539,582 B1	9/2013	Aziz et al.	9,807,115 B2	10/2017	Kolton et al.
8,549,643 B1	10/2013	Shou	9,813,451 B2	11/2017	Honda et al.
8,555,385 B1	10/2013	Bhatkar et al.	9,871,766 B2	1/2018	Syed et al.
8,561,177 B1	10/2013	Aziz et al.	9,877,210 B1	1/2018	Hildner et al.
8,566,946 B1	10/2013	Aziz et al.	9,888,032 B2	2/2018	Dekel et al.
8,607,054 B2	12/2013	Ramarathinam et al.	9,898,763 B1	2/2018	Vaynblat et al.
8,607,340 B2	12/2013	Wright	9,942,270 B2	3/2018	Vissamsetty et al.
8,627,475 B2	1/2014	Loveland et al.	10,025,928 B2	7/2018	Jarocho et al.
8,677,494 B2	3/2014	Ederly et al.	10,044,675 B1 *	8/2018	Ettema H04L 63/0227
8,713,306 B1	4/2014	Bennett	10,102,374 B1	10/2018	Cohen et al.
8,719,937 B2	5/2014	Sundaram et al.	10,169,586 B2	1/2019	Maciejak et al.
8,725,898 B1	5/2014	Vincent	10,237,282 B2	3/2019	Nelson et al.
8,726,389 B2	5/2014	Morris et al.	10,250,636 B2	4/2019	Vissamsetty et al.
8,732,296 B1	5/2014	Thomas et al.	10,257,224 B2	4/2019	Jarocho et al.
8,752,173 B2	6/2014	Yadav	10,284,591 B2	5/2019	Giuliani et al.
8,789,135 B1	7/2014	Pani	10,375,110 B2	7/2019	Vissamsetty et al.
			10,382,484 B2	8/2019	Shayevitz et al.
			10,476,891 B2	11/2019	Vissamsetty et al.
			10,509,905 B2	12/2019	Vissamsetty et al.
			10,542,044 B2	1/2020	Vissamsetty et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

10,567,431	B2	1/2020	Vissamsetty et al.	2008/0127346	A1	5/2008	Oh et al.
10,574,698	B1	2/2020	Sharifi	2008/0162397	A1	7/2008	Zaltzman
10,599,842	B2	3/2020	Vissamsetty et al.	2008/0168559	A1	7/2008	Touitou et al.
10,599,844	B2	3/2020	Schmidtler et al.	2008/0170566	A1	7/2008	Akimoto
10,609,074	B2	3/2020	Vissamsetty et al.	2008/0229415	A1	9/2008	Kapoor et al.
10,757,090	B2	8/2020	Kahol et al.	2009/0077664	A1	3/2009	Hsu et al.
10,826,941	B2	11/2020	Jain et al.	2009/0089040	A1	4/2009	Monastyrsky et al.
10,855,671	B2	12/2020	Kahol et al.	2009/0104046	A1	4/2009	Martin et al.
10,938,854	B2	3/2021	Strogov et al.	2009/0158407	A1	6/2009	Nicodemus et al.
11,032,301	B2	6/2021	Mandrychenko et al.	2009/0158418	A1	6/2009	Rao et al.
11,038,658	B2	6/2021	Vissamsetty et al.	2009/0170566	A1	7/2009	Kwon et al.
11,171,974	B2	11/2021	Gertner et al.	2009/0199296	A1	8/2009	Xie et al.
11,470,115	B2	10/2022	Vissamsetty et al.	2009/0241173	A1	9/2009	Troyansky
2002/0010800	A1	1/2002	Riley et al.	2009/0249466	A1	10/2009	Motil et al.
2002/0016826	A1	2/2002	Johansson et al.	2009/0249470	A1	10/2009	Litvin et al.
2002/0078382	A1	6/2002	Sheikh et al.	2009/0254973	A1	10/2009	Kwan
2002/0093917	A1	7/2002	Knobbe et al.	2009/0288158	A1	11/2009	Izatt et al.
2002/0095607	A1	7/2002	Lin-Hendel	2009/0296641	A1	12/2009	Bienas et al.
2002/0178374	A1	11/2002	Swimmer et al.	2009/0327688	A1	12/2009	Li et al.
2002/0194489	A1	12/2002	Almogly et al.	2009/0328196	A1	12/2009	Bovee
2003/0065950	A1	4/2003	Yarborough	2010/0005339	A1	1/2010	Hooks
2003/0145225	A1	7/2003	Bruton, III et al.	2010/0077483	A1	3/2010	Stolfo et al.
2003/0145226	A1	7/2003	Bruton, III et al.	2010/0122317	A1	5/2010	Yadav
2003/0152034	A1	8/2003	Zhang et al.	2010/0122343	A1	5/2010	Ghosh et al.
2003/0188189	A1	10/2003	Desai et al.	2010/0169973	A1	7/2010	Kim et al.
2003/0223367	A1	12/2003	Shay et al.	2010/0269175	A1	10/2010	Stolfo et al.
2004/0083369	A1	4/2004	Erlingsson et al.	2010/0293615	A1	11/2010	Ye
2004/0172557	A1	9/2004	Nakae et al.	2010/0299430	A1	11/2010	Powers et al.
2004/0243699	A1	12/2004	Koclanes et al.	2011/0023118	A1	1/2011	Wright et al.
2004/0255157	A1	12/2004	Ghanea-Hercock	2011/0067107	A1	3/2011	Weeks et al.
2005/0050353	A1	3/2005	Thiele et al.	2011/0078309	A1	3/2011	Bloch
2005/0076235	A1	4/2005	Ormazabal et al.	2011/0099633	A1	4/2011	Aziz
2005/0076238	A1	4/2005	Ormazabal et al.	2011/0113427	A1	5/2011	Dotan
2005/0108562	A1	5/2005	Khazan et al.	2011/0138456	A1	6/2011	Ormazabal et al.
2005/0138402	A1	6/2005	Yoon et al.	2011/0141937	A1	6/2011	Breslin et al.
2005/0204157	A1	9/2005	Johnson	2011/0145920	A1	6/2011	Mahaffey et al.
2005/0223239	A1 *	10/2005	Dotan	2011/0167494	A1	7/2011	Bowen
			G06F 21/53	2011/0178930	A1	7/2011	Scheidt et al.
			713/188	2011/0185430	A1	7/2011	Sallam
				2011/0214176	A1	9/2011	Burch et al.
				2011/0214182	A1 *	9/2011	Adams
							H04L 63/1408
							726/23
2005/0240989	A1	10/2005	Kim et al.	2011/0219443	A1	9/2011	Hampel
2006/0085543	A1	4/2006	Hrastar	2011/0219449	A1	9/2011	St. Neitzel
2006/0101515	A1	5/2006	Amoroso et al.	2011/0247071	A1	10/2011	Hooks et al.
2006/0126522	A1	6/2006	Oh	2011/0271341	A1	11/2011	Satish et al.
2006/0161989	A1	7/2006	Reshef et al.	2011/0288940	A1	11/2011	Hordan et al.
2006/0203774	A1	9/2006	Carrion-Rodrigo	2012/0023572	A1	1/2012	William, Jr. et al.
2006/0209701	A1	9/2006	Zhang et al.	2012/0030745	A1	2/2012	Bauer
2006/0230129	A1	10/2006	Swami et al.	2012/0030750	A1	2/2012	Bhargava et al.
2006/0236401	A1	10/2006	Fosdick	2012/0079596	A1	3/2012	Thomas et al.
2007/0022090	A1	1/2007	Graham	2012/0084866	A1	4/2012	Stolfo
2007/0025374	A1	2/2007	Stefan et al.	2012/0106377	A1	5/2012	Sommers et al.
2007/0067623	A1	3/2007	Ward	2012/0124363	A1	5/2012	Dietrich et al.
2007/0097976	A1	5/2007	Wood et al.	2012/0137342	A1	5/2012	Hartrell et al.
2007/0100905	A1	5/2007	Masters et al.	2012/0137367	A1	5/2012	Dupont et al.
2007/0101431	A1	5/2007	Clift et al.	2012/0144488	A1	6/2012	Sankruthi
2007/0115993	A1	5/2007	Cohen	2012/0151565	A1	6/2012	Fiterman
2007/0143827	A1	6/2007	Nicodemus et al.	2012/0185563	A1	7/2012	Sugiyama et al.
2007/0143851	A1	6/2007	Nicodemus et al.	2012/0240182	A1	9/2012	Marayanaswamy et al.
2007/0177499	A1	8/2007	Gavrilescu et al.	2012/0255003	A1	10/2012	Sallam
2007/0208822	A1	9/2007	Wang et al.	2012/0255004	A1	10/2012	Sallam
2007/0208936	A1	9/2007	Ramos	2012/0291090	A1	11/2012	Srinivasan et al.
2007/0209070	A1	9/2007	Yadav	2012/0297488	A1	11/2012	Kapoor et al.
2007/0226320	A1	9/2007	Hager et al.	2012/0324094	A1	12/2012	Wyatt et al.
2007/0240215	A1	10/2007	Flores et al.	2012/0331553	A1	12/2012	Aziz et al.
2007/0250930	A1	10/2007	Aziz et al.	2013/0052992	A1 *	2/2013	Lee
2007/0282782	A1	12/2007	Carey et al.				G06F 21/45
2008/0005782	A1	1/2008	Aziz				455/411
2008/0018927	A1	1/2008	Martin et al.	2013/0061097	A1 *	3/2013	Mendel
2008/0022000	A1	1/2008	Furuya et al.				G06F 21/54
2008/0034429	A1	2/2008	Schneider				714/47.1
2008/0046989	A1	2/2008	Wahl	2013/0080641	A1	3/2013	Lui et al.
2008/0060074	A1	3/2008	Okuyama	2013/0086684	A1	4/2013	Mohler
2008/0071728	A1	3/2008	Lim	2013/0091573	A1	4/2013	Herz et al.
2008/0082722	A1	4/2008	Savagaonkar et al.	2013/0097706	A1	4/2013	Titonis et al.
2008/0083034	A1	4/2008	Kim et al.	2013/0111547	A1	5/2013	Kraemer
2008/0098476	A1	4/2008	Syversen	2013/0133072	A1	5/2013	Kraitsman et al.
2008/0104046	A1	5/2008	Singla et al.	2013/0152200	A1	6/2013	Alme et al.
				2013/0167236	A1	6/2013	Sick
				2013/0191924	A1	7/2013	Tedesco et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2013/0212658	A1	8/2013	Amaya et al.	2015/0326587	A1	11/2015	Vissamsetty et al.
2013/0219217	A1	8/2013	Seren et al.	2015/0326588	A1	11/2015	Vissamsetty et al.
2013/0231084	A1	9/2013	Raleigh	2015/0326592	A1	11/2015	Vissamsetty et al.
2013/0242743	A1	9/2013	Thomas et al.	2015/0326599	A1	11/2015	Vissamsetty et al.
2013/0247190	A1	9/2013	Spurlock	2015/0350236	A1	12/2015	Klinghofer et al.
2013/0290662	A1	10/2013	Teal	2015/0358345	A1	12/2015	Clark et al.
2013/0290729	A1 *	10/2013	Pettigrew G06F 21/52 713/189	2015/0373039	A1	12/2015	Wang
2013/0291111	A1	10/2013	Zhou et al.	2015/0381376	A1	12/2015	Wardman et al.
2013/0298192	A1	11/2013	Kumar et al.	2016/0028750	A1	1/2016	Di Pietro et al.
2013/0298244	A1	11/2013	Kumar et al.	2016/0042179	A1	2/2016	Weingarten
2013/0329732	A1	12/2013	Vyas et al.	2016/0042180	A1	2/2016	Sayre et al.
2013/0333040	A1	12/2013	Diehl et al.	2016/0055334	A1	2/2016	Herwono et al.
2013/0340033	A1	12/2013	Jones et al.	2016/0055337	A1	2/2016	El-Moussa
2013/0346472	A1	12/2013	Wheeldon	2016/0072838	A1	3/2016	Kolton et al.
2013/0347052	A1	12/2013	Choudrie	2016/0078365	A1	3/2016	Baumard
2014/0046645	A1	2/2014	White et al.	2016/0080414	A1	3/2016	Kolton et al.
2014/0053267	A1	2/2014	Klein et al.	2016/0127352	A1	5/2016	Xu et al.
2014/0068326	A1	3/2014	Quinn	2016/0127413	A1	5/2016	Kraitsman et al.
2014/0068779	A1	3/2014	Tan et al.	2016/0142399	A1	5/2016	Pace et al.
2014/0090061	A1	3/2014	Avasaraia et al.	2016/0191554	A1	6/2016	Kaminsky
2014/0096229	A1	4/2014	Burns et al.	2016/0212225	A1	7/2016	Smith et al.
2014/0108794	A1	4/2014	Barton et al.	2016/0261631	A1	9/2016	Vissamsetty et al.
2014/0123280	A1	5/2014	Kedma	2016/0285914	A1	9/2016	Singh et al.
2014/0137246	A1	5/2014	Baluda	2016/0315909	A1	10/2016	Von Gravrock et al.
2014/0150094	A1	5/2014	Rao et al.	2016/0323300	A1	11/2016	Boss et al.
2014/0157366	A1	6/2014	Ko et al.	2016/0323316	A1	11/2016	Kolton et al.
2014/0165203	A1	6/2014	Friedrichs et al.	2016/0381023	A1	12/2016	Dulce et al.
2014/0215617	A1	7/2014	Smith et al.	2017/0019425	A1	1/2017	Ettema et al.
2014/0215621	A1	7/2014	Xaypanya et al.	2017/0026387	A1	1/2017	Vissamsetty et al.
2014/0215625	A1	7/2014	Paul et al.	2017/0032122	A1	2/2017	Thakar et al.
2014/0237562	A1	8/2014	Nandakumar	2017/0054754	A1	2/2017	Saher et al.
2014/0237595	A1	8/2014	Sridhara et al.	2017/0093910	A1	3/2017	Gukal et al.
2014/0237599	A1	8/2014	Gertner et al.	2017/0126718	A1	5/2017	Baradaran et al.
2014/0245376	A1	8/2014	Hibbert et al.	2017/0134405	A1	5/2017	Ahmadzadeh et al.
2014/0250524	A1	9/2014	Meyers et al.	2017/0141980	A1	5/2017	Palanciuc et al.
2014/0259092	A1	9/2014	Boucher et al.	2017/0147796	A1	5/2017	Sardesai et al.
2014/0282816	A1	9/2014	Xie et al.	2017/0149787	A1	5/2017	Niemela et al.
2014/0283076	A1	9/2014	Muttik	2017/0149795	A1	5/2017	Day, II
2014/0298419	A1	10/2014	Boubez et al.	2017/0149832	A1	5/2017	Touboul et al.
2014/0349611	A1	11/2014	Kant et al.	2017/0171244	A1	6/2017	Vissamsetty et al.
2015/0006384	A1	1/2015	Shaikh	2017/0180421	A1	6/2017	Shieh et al.
2015/0007312	A1	1/2015	Pidathala et al.	2017/0206357	A1	7/2017	Gorelik et al.
2015/0013006	A1	1/2015	Shulman et al.	2017/0230384	A1	8/2017	Touboul et al.
2015/0039513	A1	2/2015	Adjaoute	2017/0230402	A1	8/2017	Greenspan et al.
2015/0074810	A1	3/2015	Saher et al.	2017/0235967	A1	8/2017	Ray et al.
2015/0082430	A1	3/2015	Sridhara et al.	2017/0244729	A1	8/2017	Fahrny et al.
2015/0089655	A1	3/2015	Choi et al.	2017/0244749	A1	8/2017	Shulman et al.
2015/0096048	A1	4/2015	Zhang et al.	2017/0244755	A1	8/2017	Tsao
2015/0113616	A1	4/2015	Sampas	2017/0264639	A1	9/2017	Sama et al.
2015/0121524	A1	4/2015	Fawaz et al.	2017/0279846	A1	9/2017	Osterweil et al.
2015/0121529	A1	4/2015	Quinlan et al.	2017/0286676	A1	10/2017	Weingarten et al.
2015/0128206	A1	5/2015	Haim et al.	2017/0302458	A1	10/2017	Berger et al.
2015/0128246	A1	5/2015	Feghali et al.	2017/0302653	A1	10/2017	Ortner et al.
2015/0143496	A1	5/2015	Thomas et al.	2017/0302665	A1	10/2017	Zou et al.
2015/0150125	A1	5/2015	Dulkin et al.	2017/0302696	A1	10/2017	Schutz et al.
2015/0150130	A1	5/2015	Fiala	2017/0318054	A1	11/2017	Vissamsetty et al.
2015/0156214	A1	6/2015	Kaminsky	2017/0322959	A1	11/2017	Tidwell et al.
2015/0163121	A1	6/2015	Mahaffey et al.	2017/0324774	A1	11/2017	Ohayon et al.
2015/0172300	A1	6/2015	Cochenour	2017/0324777	A1	11/2017	Ohayon et al.
2015/0195291	A1	7/2015	Zuk et al.	2017/0331849	A1	11/2017	Yu et al.
2015/0199512	A1	7/2015	Kim et al.	2017/0331856	A1	11/2017	Vissamsetty et al.
2015/0200928	A1	7/2015	Burch et al.	2017/0346802	A1	11/2017	Gruskin et al.
2015/0205962	A1	7/2015	Swidowski et al.	2017/0346853	A1	11/2017	Wyatt et al.
2015/0220735	A1	8/2015	Paithane et al.	2017/0359370	A1	12/2017	Humphries et al.
2015/0254161	A1	9/2015	Baril et al.	2018/0013788	A1	1/2018	Vissamsetty et al.
2015/0257194	A1	9/2015	Cho	2018/0020005	A1	1/2018	Beiter et al.
2015/0264068	A1	9/2015	Beauchesne	2018/0027006	A1	1/2018	Zimmermann et al.
2015/0264077	A1	9/2015	Berger et al.	2018/0027017	A1	1/2018	Touboul et al.
2015/0268947	A1	9/2015	Ionescu	2018/0039776	A1	2/2018	Loman et al.
2015/0271200	A1	9/2015	Brady et al.	2018/0048665	A1	2/2018	Shulman et al.
2015/0281267	A1	10/2015	Danahy et al.	2018/0063187	A1	3/2018	St Pierre
2015/0286820	A1	10/2015	Sridhara et al.	2018/0089430	A1	3/2018	Mayo
2015/0288706	A1	10/2015	Marshall	2018/0143915	A1	5/2018	Gonzalez et al.
2015/0310196	A1	10/2015	Turgeman et al.	2018/0146008	A1	5/2018	Vissamsetty et al.
				2018/0173876	A1	6/2018	Vissamsetty et al.
				2018/0183815	A1	6/2018	Enfinger
				2018/0248896	A1	8/2018	Challita et al.
				2019/0042745	A1	2/2019	Chen et al.
				2019/0052659	A1	2/2019	Weingarten et al.

(56)

References Cited**U.S. PATENT DOCUMENTS**

2019/0068642	A1	2/2019	Araujo et al.
2019/0073475	A1	3/2019	Vissamsetty et al.
2019/0114426	A1	4/2019	Cohen et al.
2019/0253453	A1	8/2019	Vissamsetty et al.
2019/0354355	A1	11/2019	Jacobson et al.
2019/0379697	A1	12/2019	Vissamsetty et al.
2020/0143054	A1	5/2020	Cohen et al.
2020/0218806	A1	7/2020	Cho
2020/0252429	A1	8/2020	Vissamsetty et al.
2020/0374087	A1	11/2020	Vissamsetty et al.
2021/0397710	A1	12/2021	Cohen et al.

FOREIGN PATENT DOCUMENTS

JP	2016-512631	4/2016
JP	2017-504102	2/2017
KR	10-2015-0101811	9/2015
KR	10-1969572	4/2019
WO	WO 02/27440 A2	4/2002
WO	WO 2010/030169 A2	3/2010
WO	WO 2012/027669	3/2012
WO	WO 2013/014672	1/2013
WO	WO 2015/171780 A1	11/2015
WO	WO 2015/171789 A1	11/2015
WO	WO 2016/024268	2/2016
WO	WO 2016/081561 A1	5/2016
WO	WO 2017/064710	4/2017
WO	WO 2019/092530	5/2019
WO	WO 2019/032728	3/2020

OTHER PUBLICATIONS

Chen et al., "MitM attack by name collision: Cause analysis and vulnerability assessment in the new gTLD era." Security and Privacy (SP), 2016 IEEE Symposium on. IEEE (2016).

Dini et al., "Probabilistic Contract Compliance for Mobile Applications", Eighth International Conference on Availability, Reliability and Security (ARES) IEEE, Sep. 2-6, 2013, pp. 599-606.

Gu et al., "Malicious Shellcode Detection with Virtual Memory Snapshots," 2010 Proceedings IEEE Infocom, San Diego, CA, 2010, pp. 1-9, accessed Mar. 6, 2019.

Installing a Tanium Client—distributed also using user/password (not encrypted) from a hosted Module server, downloaded from https://docs.tanium.com/client/client/deployment.html#client_management on Apr. 1, 2021.

IBM Software, "Stepping up the battle against advanced threats", IBM Trusteer Apex Thought Leadership White Paper, Dec. 2013, WGW03043-US-EN-00.

"IBM Security Qradar SIEM Installation Guide" downloaded from http://www.siem.su/docs/ibm/Installation_and Updating/IBM_Security_Qradar_installation_Guide.pdf, printed 2013, vol. 7.2 in 54 pages.

IBM Security Guardium Insights for IBM Cloud Park for Security, printed from <https://www.ibm.com/downloads/cas/QYIRYRLP>, printed May 26, 2021 in 12 pages.

IBM Security Qradar Solution Brief "Visibility, detection, investigation and response" printed from <https://www.ibm.com/downloads/cas/OP62GKAR>, printed on May 26, 2021 in 11 pgs.

"IBM Security Trusteer Apex Advanced malware Protection (SaaS) delivers an enterprise endpoint security solution to help protect organizations from advanced malware and targeted attacks" downloaded from https://www-01.ibm.com/common/ssi/rep_ca/0/877/ENUSZP14-0390/ENUSZP14-0390.PDF, printed Aug. 5, 2014, in 9 pgs.

IBM Guardium Documentation "Components and Topology", downloaded from <https://www.ibm.com/docs/en/qsip/7.4?topic=deployment-qradar-architecture-overview>, printed on Jun. 8, 2021 in 3 pages.

IBM Software "Stepping up the battle against advanced threats", downloaded from <https://citrixready.citrix.com/content/dam/ready/>

partners/ibm-global-services/ibm-security-trusteer-apex-advanced-malware-protection/wgw03043usen.pdf, Printed Dec. 2013 in 12 pages.

Laureano et al., M., "Intrusion detection in virtual machine environments. In Euromicro Conference, 2004. Proceedings." 30th (pp. 520-525). IEEE Sep. 30, 2004.

Liu et al., "Detecting Trojan Horses Based on System Behavior Using Machine Learning Method", International Conference on Machine Learning and Cybernetics (ICMLC), IEEE, Jul. 11-14, 2010, pp. 855-860.

IBM, "Qradar Architecture overview", downloaded from <https://www.ibm.com/docs/en/qsip/7.4?topic=deployment-qradar-architecture-overview> printed May 28, 2021 in 6 pgs.

Moussaileb et al., "Ransomware's Early Mitigation Mechanisms," Proceedings ARES 2018 Proceedings of the 13th International Conference on Availability, Reliability and Security Article No. 2, pp. 1-10 (2018).

Ornaghi et al., "Man in the middle attacks." Blackhat Conference Europe (2003).

Ramachandran et al., "Detecting ARP spoofing: An active technique." International Conference on Information Systems Security, Springer, Berlin, Heidelberg (2005).

Rudiger Schollmeier, A Definition of Peer-to-Peer Networking for the Classification of Peer-to-Peer Architectures and Applications, Proceedings of the First International Conference on Peer-to-Peer Computing, IEEE (2002).

Shosha et al., A.F., "Evasion-resistant malware signature based on profiling kernel data structure objects." In 2012 7th International Conference on Risks and Security of Internet and Systems (CRISIS) (pp. 1-8). IEEE., Oct. 31, 2012.

Tanium™ Client Management 1.6 User Guide, downloaded from https://docs.tanium.com/client_management/client_management/index.html on Apr. 1, 2021.

Ullrich et al., "IPv6 Security: Attacks and Countermeasures in a Nutshell." 8th USENIX Workshop on Offensive Technologies (2015).

Xu, J-Y; Sung, A.H.; Chavez, P.; Mukkamala, S.; "Polymorphic Malicious Executable Scanner by API Sequence Analysis", Fourth International Conference on Hybrid Intelligent Systems, IEEE Dec. 5-8, 2004, pp. 378-383.

Communication Pursuant to Article 94(3) EPC dated Dec. 11, 2018 for European Application 15 760 520.5, in 7 pages.

Extended European Search Report dated May 9, 2019 for Application No. 16855062.2, in 7 pages.

European Search Report dated Apr. 29, 2021 in European Patent Application No. 18844671 in 38 pages.

Extended European Search Report dated Jan. 25, 2021 for European Patent Application No. 20181537.0, in 10 pages.

Reaqa Hive, A.I. Based Endpoint Threat Response, Whitepaper, 27 pages (Apr. 6, 2017).

International Search Report and Written Opinion dated Feb. 18, 2016 for International Application No. PCT/IL2015/050802, in 10 pages.

International Preliminary Report on Patentability dated Feb. 14, 2017 for International Application No. PCT/IL2015/050802, in 7 pages.

International Search Report and Written Opinion dated Apr. 20, 2017 for International Application No. PCT/IL2016/051110, in 10 pages.

International Search Report and Written Opinion dated Dec. 11, 2018 for International Application No. PCT/US2018/045850, in 12 pages.

International Search Report and Written Opinion dated Aug. 24, 2020 for International Application No. PCT/US2020/033872, in 8 pages.

International Search Report issued in application No. PCT/US2021/050129 dated Dec. 21, 2021.

International Search Report in corresponding International Patent Application No. PCT/US2015/29490, dated Aug. 7, 2015, in 2 pages.

Written Opinion in corresponding International Patent Application No. PCT/US2015/29490, dated Aug. 7, 2015, in 6 pages.

(56)

References Cited

OTHER PUBLICATIONS

International Preliminary Report on Patentability in corresponding International Patent Application No. PCT/US2015/29490, dated Nov. 8, 2016, in 7 pages.

International Search Report in corresponding International Patent Application No. PCT/US2015/29501, dated Aug. 7, 2015, in 2 pages.

Written Opinion in corresponding International Patent Application No. PCT/US2015/29501, dated Aug. 7, 2015, in 6 pages.

International Preliminary Report on Patentability in corresponding International Patent Application No. PCT/US2015/29501, dated Nov. 8, 2016, in 7 pages.

International Search Report in corresponding International Patent Application No. PCT/US2015/61271, dated Feb. 2, 2016, in 2 pages.

Written Opinion in corresponding International Patent Application No. PCT/US2015/61271, dated Feb. 2, 2016, in 6 pages.

International Preliminary Report on Patentability in corresponding International Patent Application No. PCT/US2015/61271, dated May 23, 2017, in 7 pages.

Office Action dated Jul. 24, 2019 in European Patent Application No. 15760520.5, in 8 pages.

Office Action dated May 31, 2022 in Japanese Patent Application No. 2020-503272, in 7 pages.

Extended European Search Report dated Aug. 25, 2021 for European Patent Application No. 21162973.8, in 5 pages.

* cited by examiner

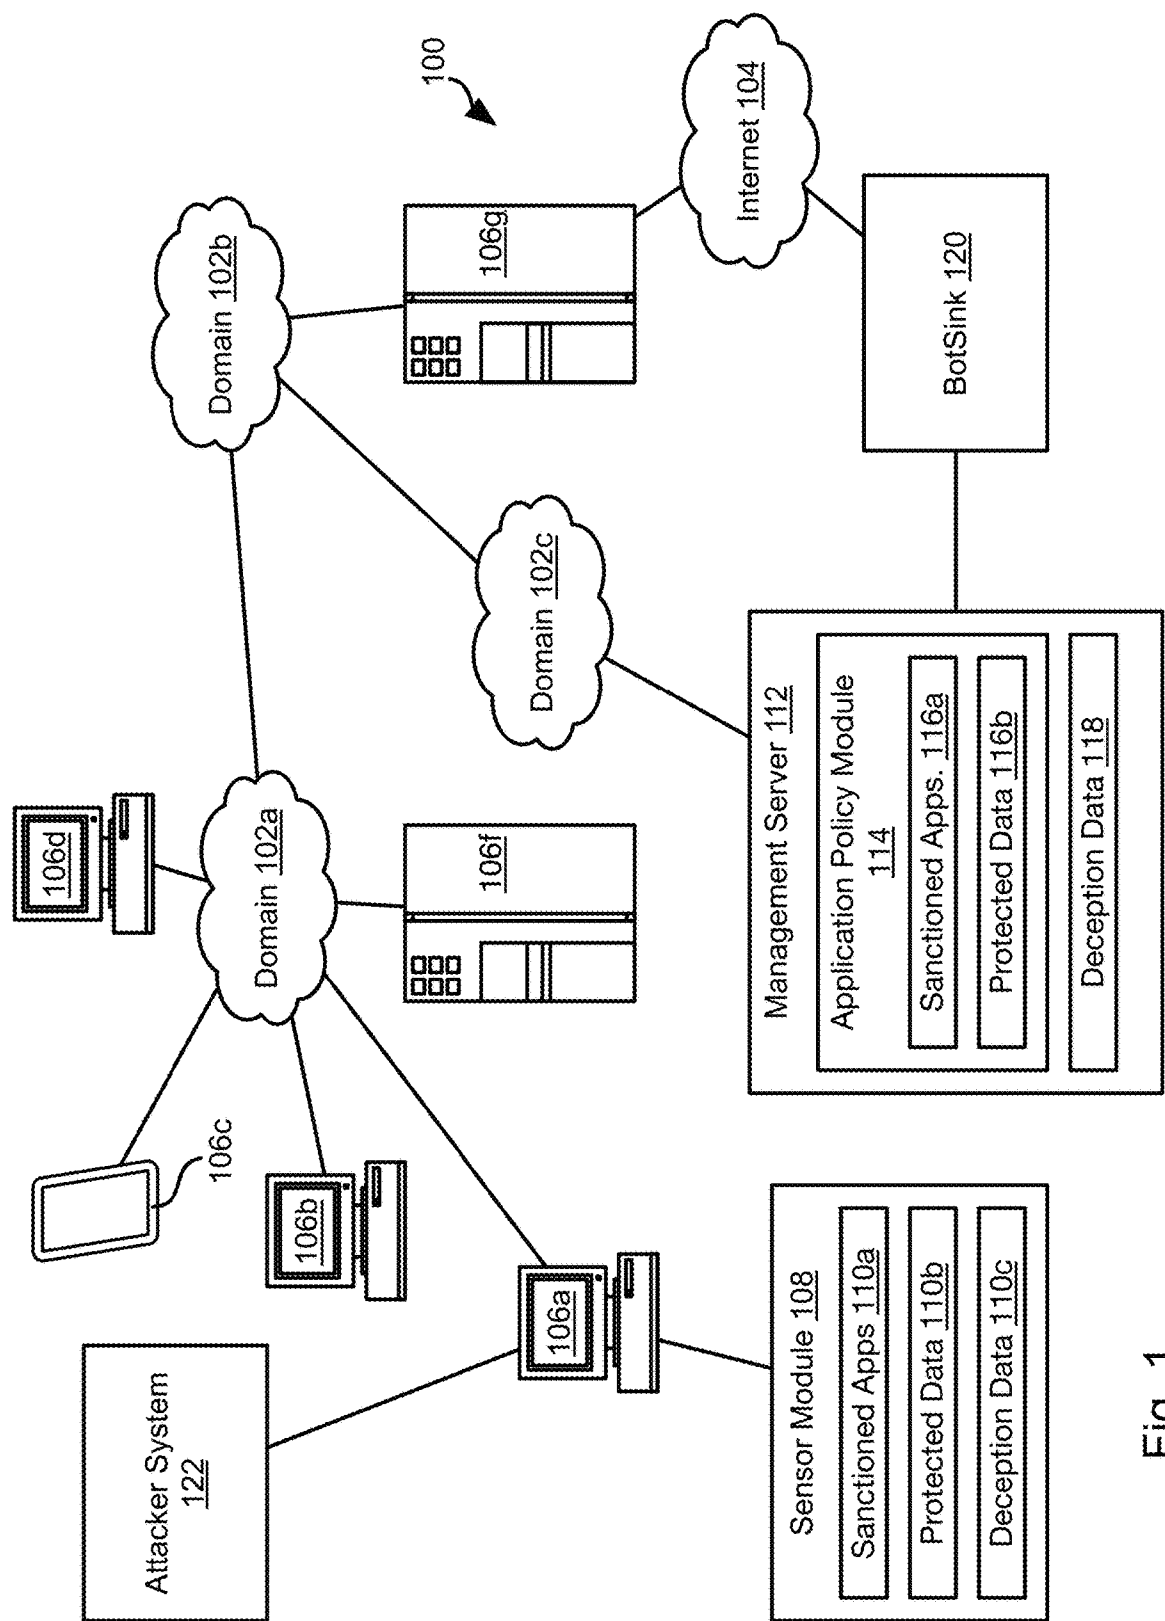


Fig. 1

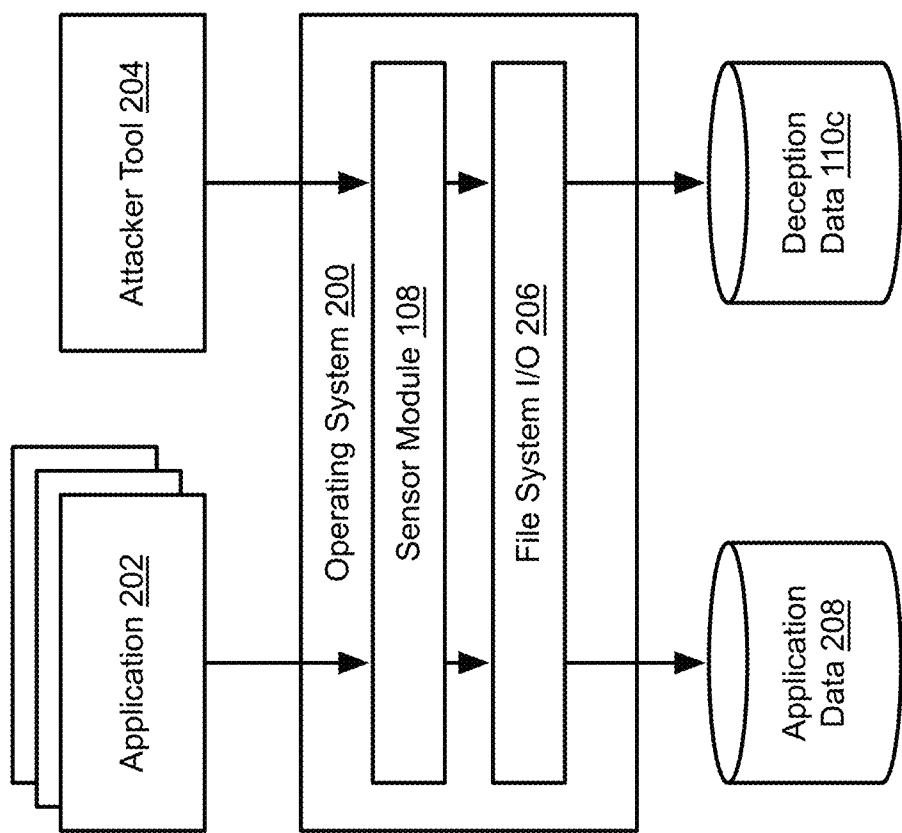


Fig. 2

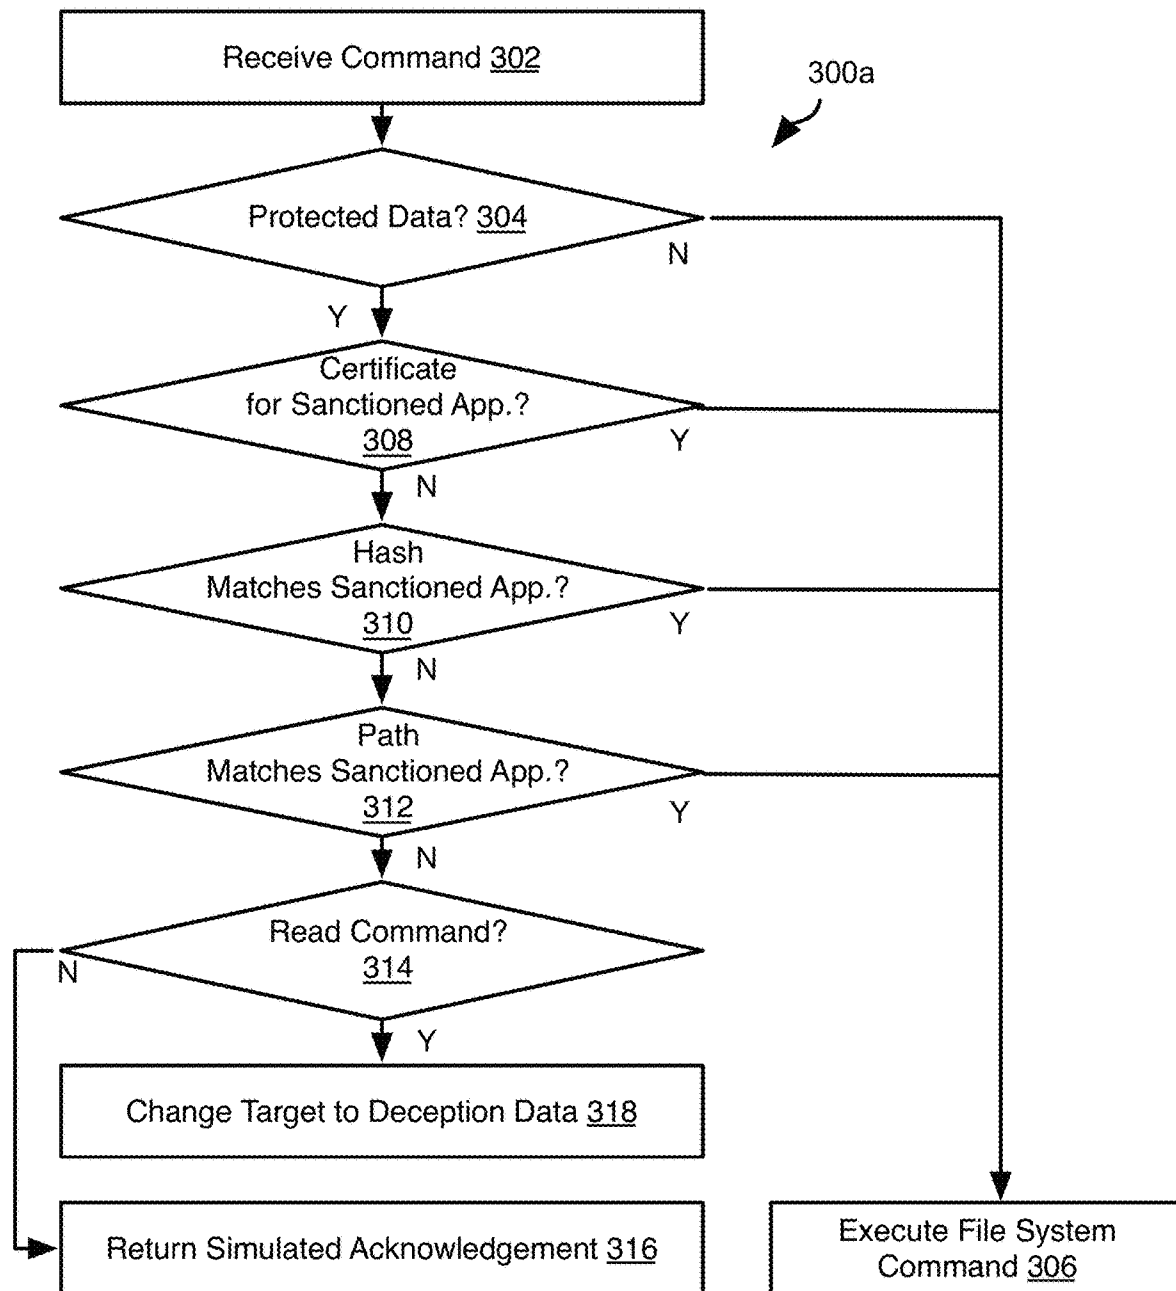


Fig. 3A

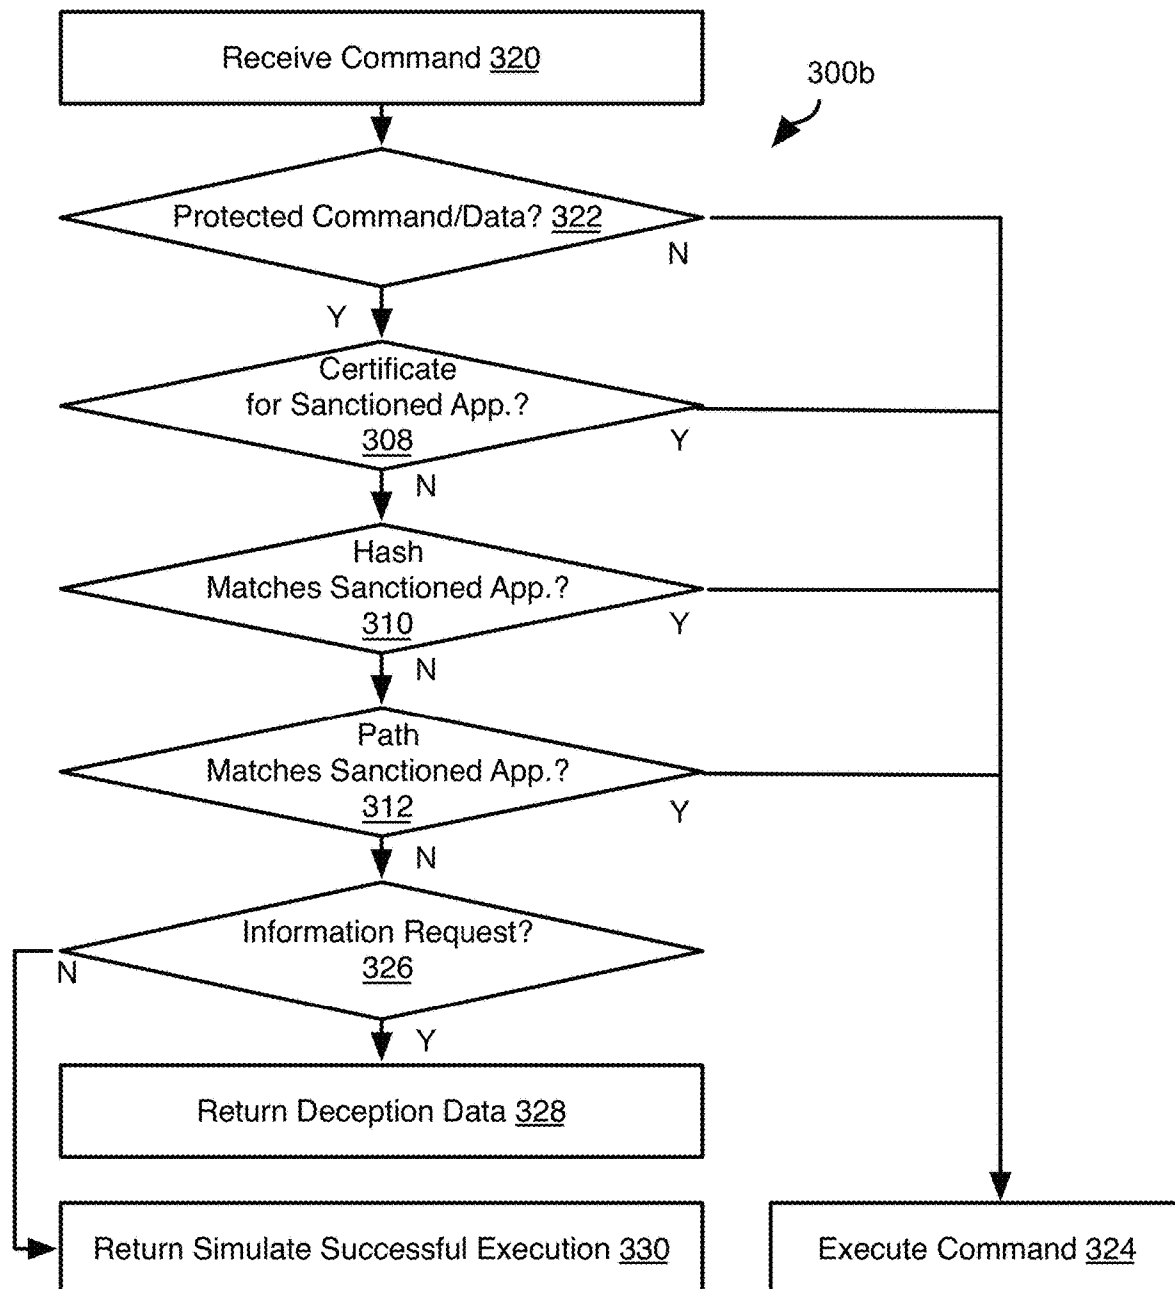


Fig. 3B

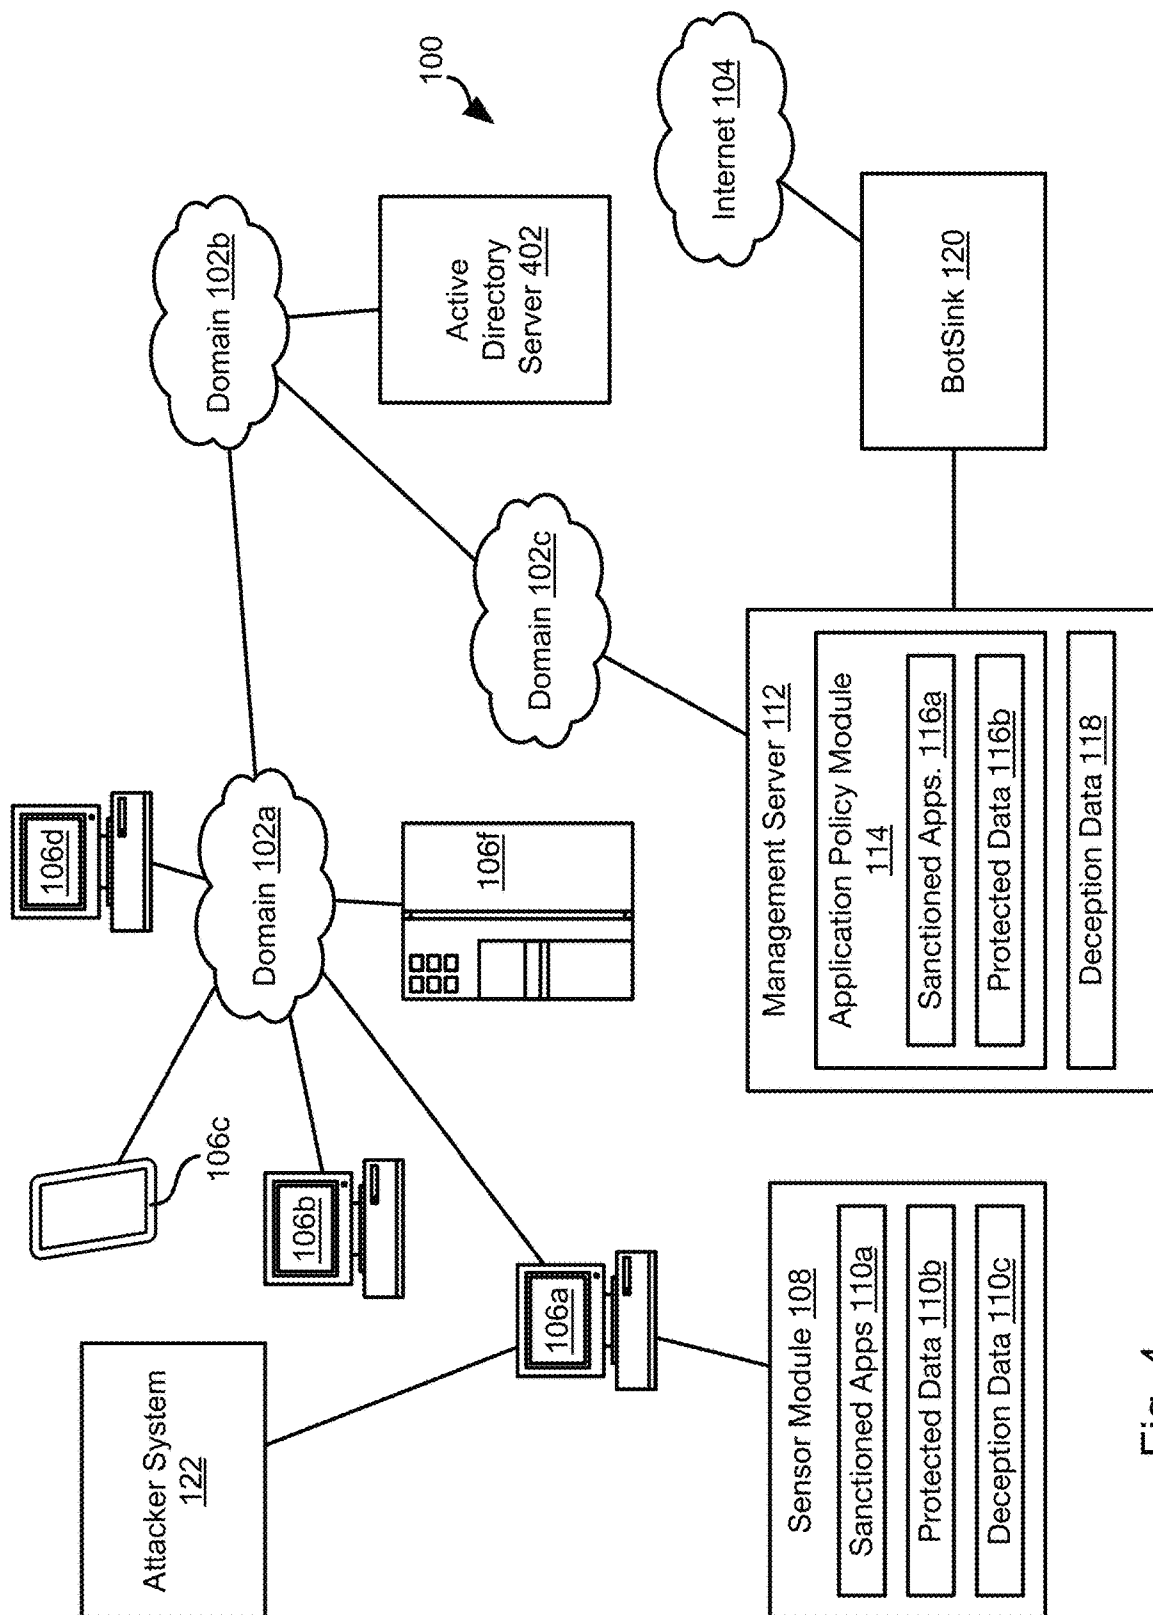


Fig. 4

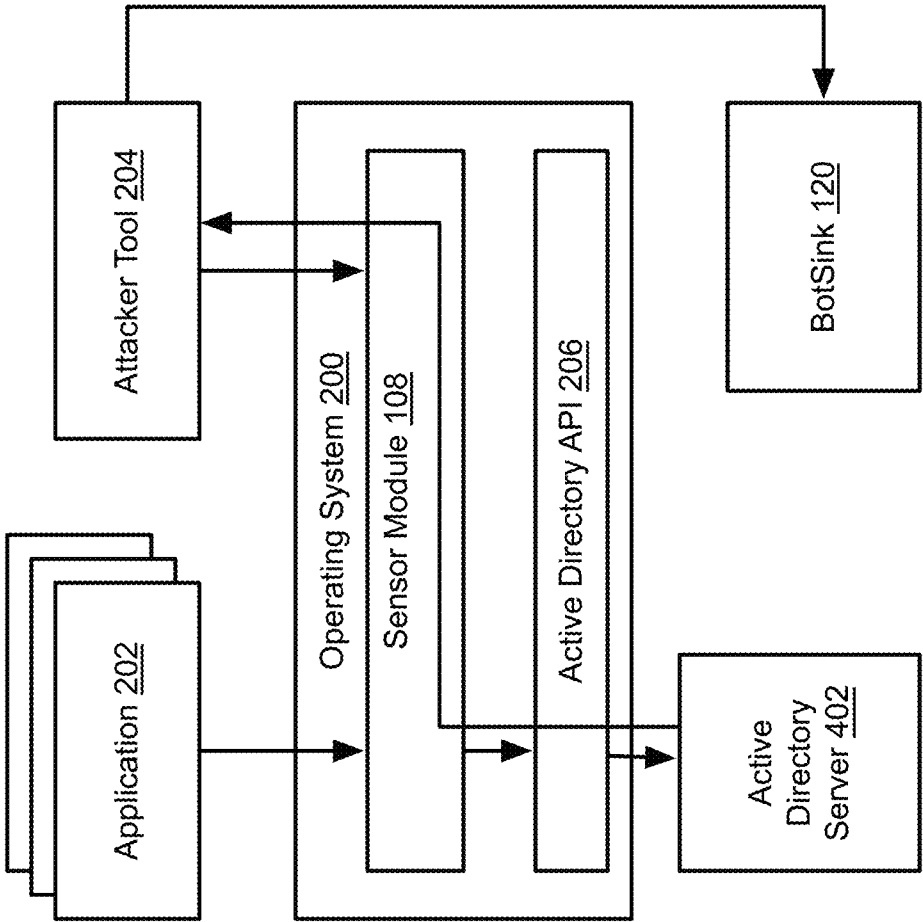


Fig. 5

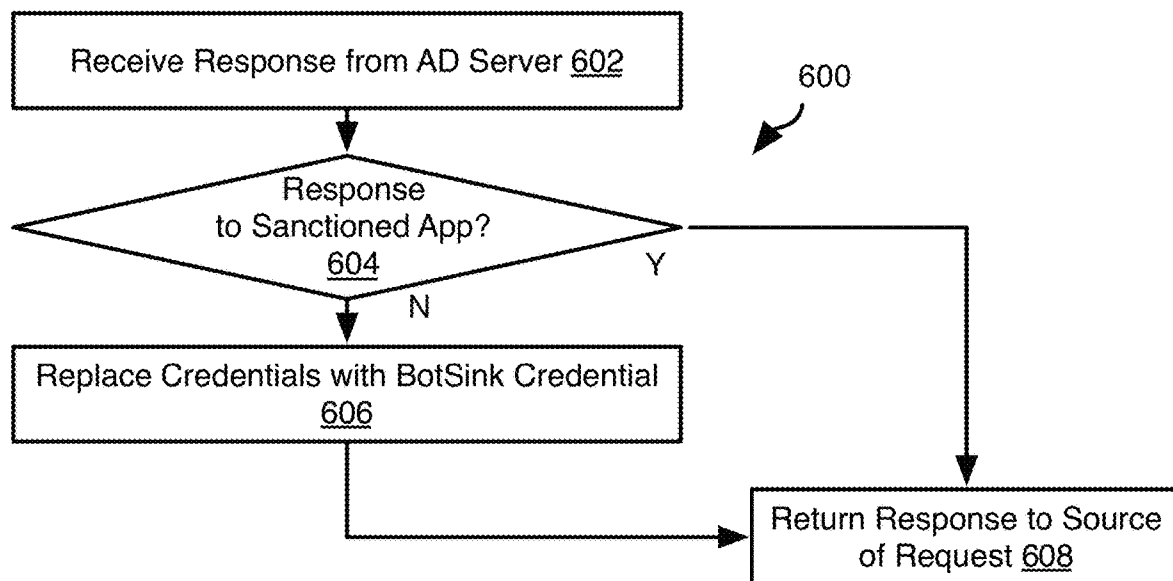


Fig. 6

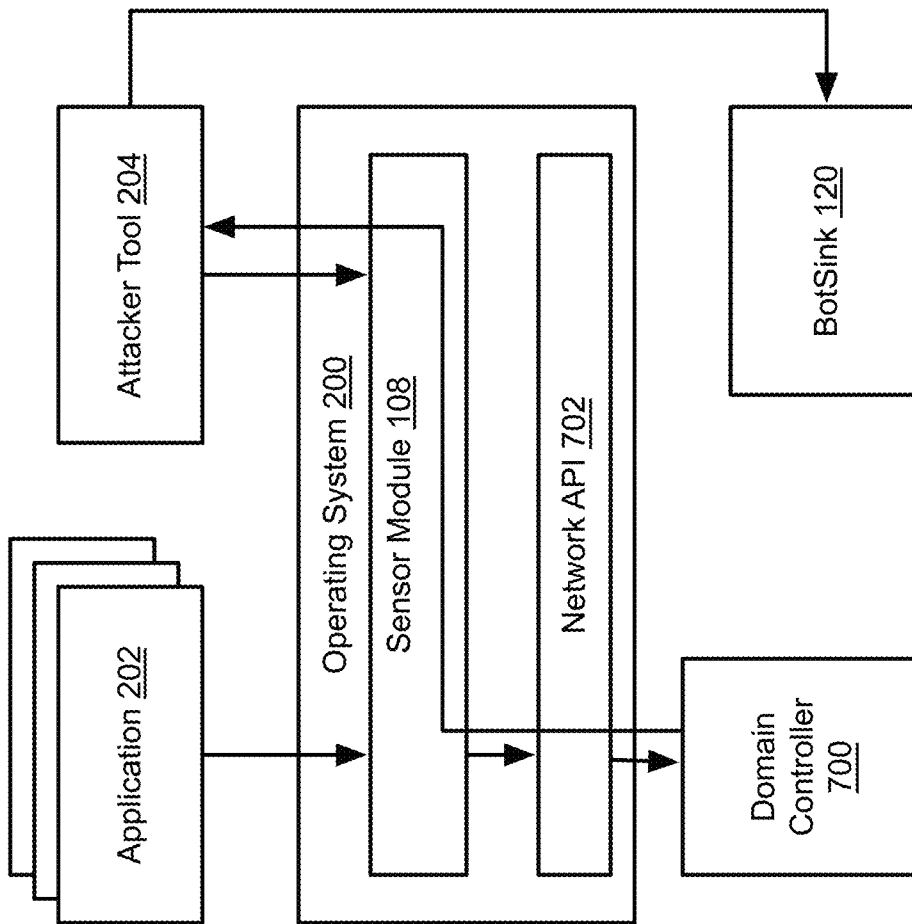


Fig. 7

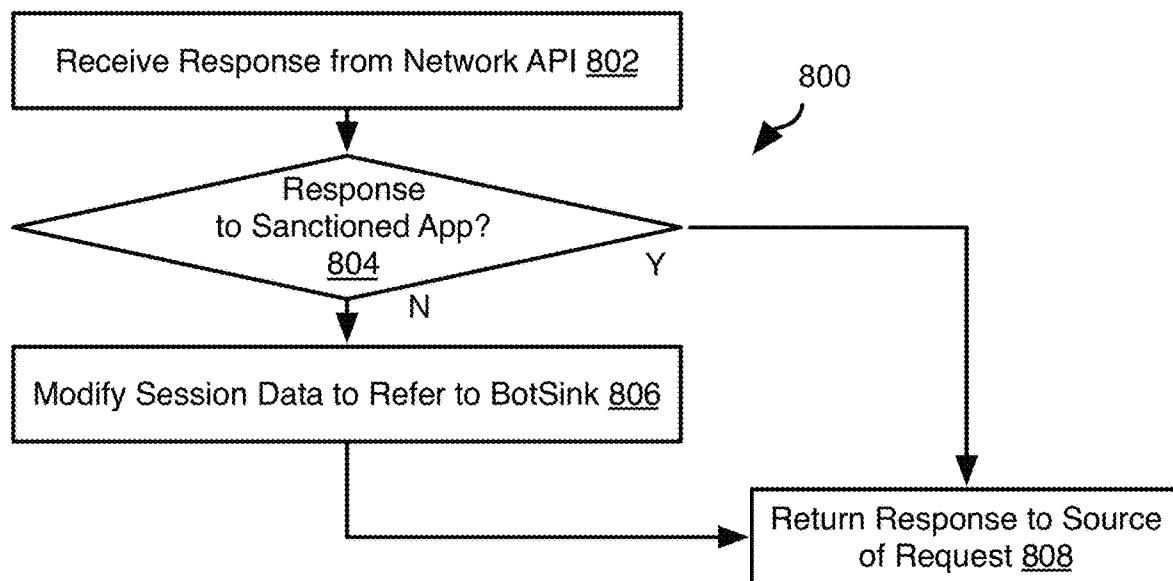


Fig. 8

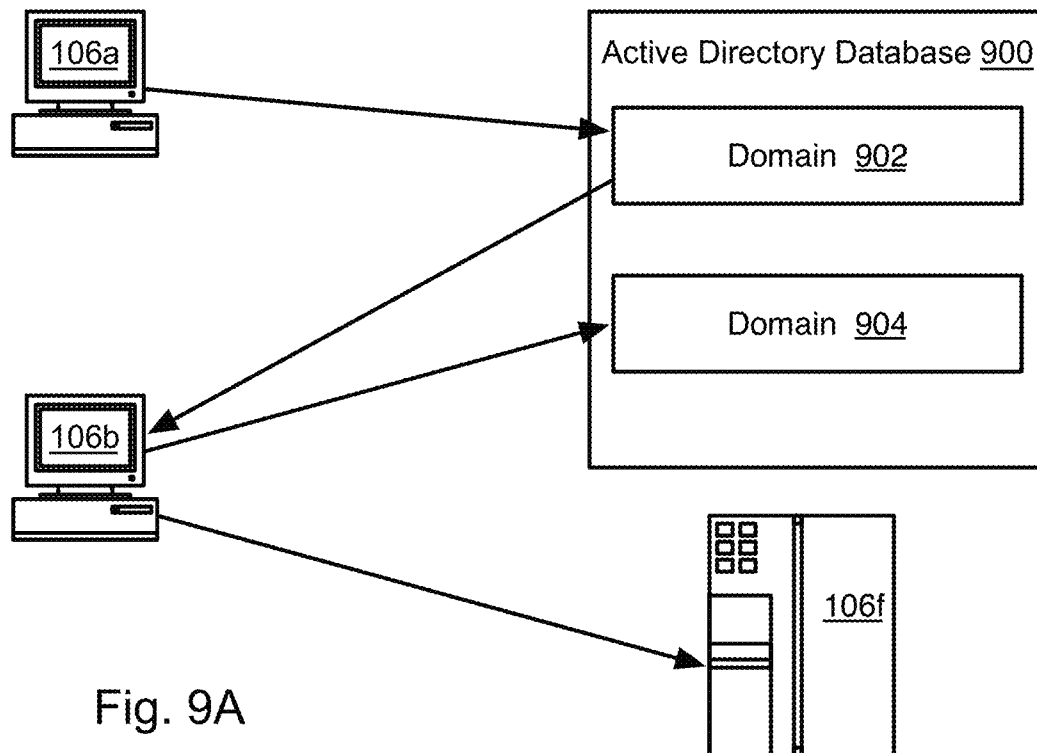


Fig. 9A

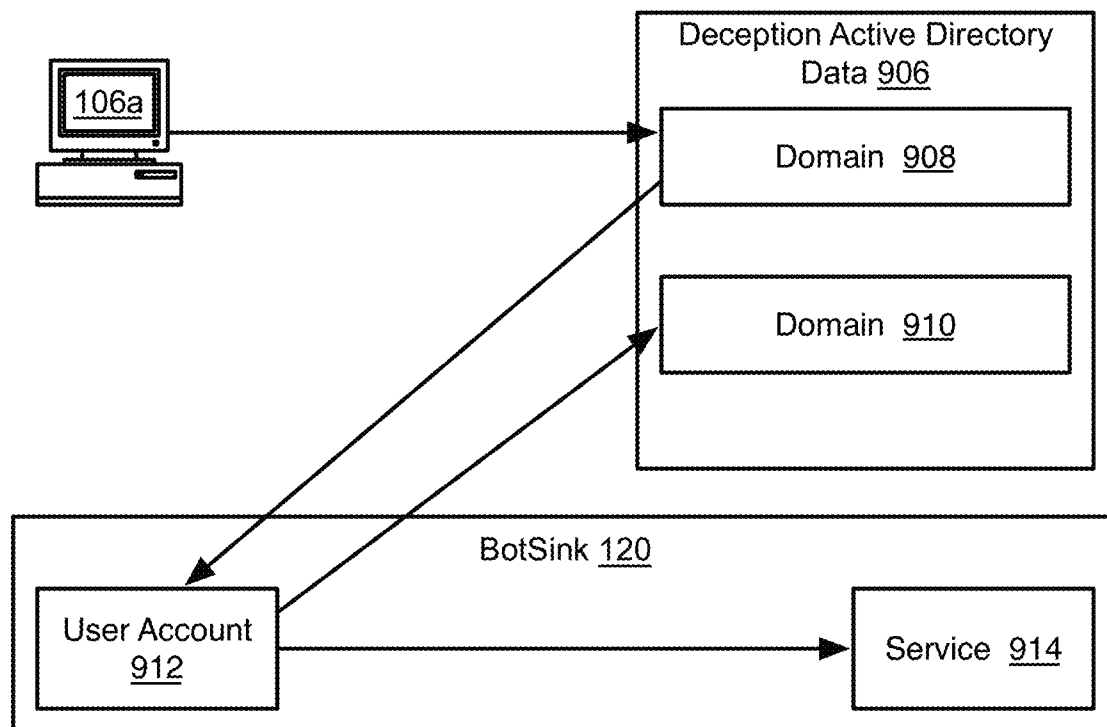


Fig. 9B

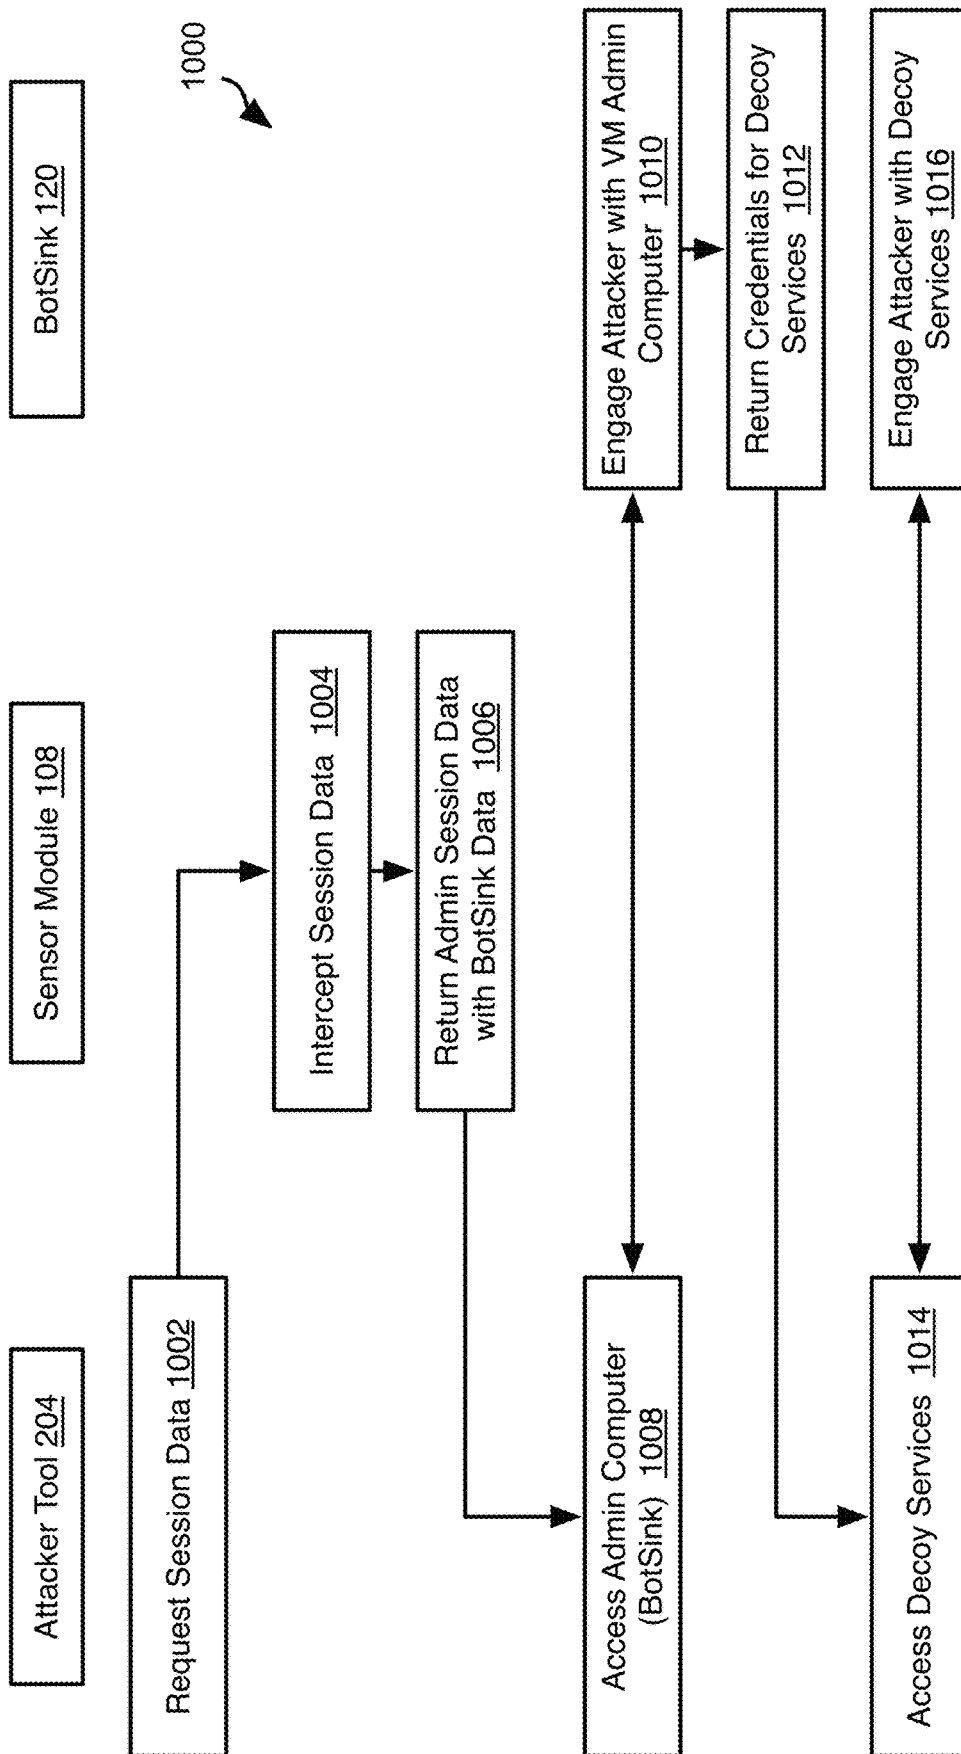


Fig. 10

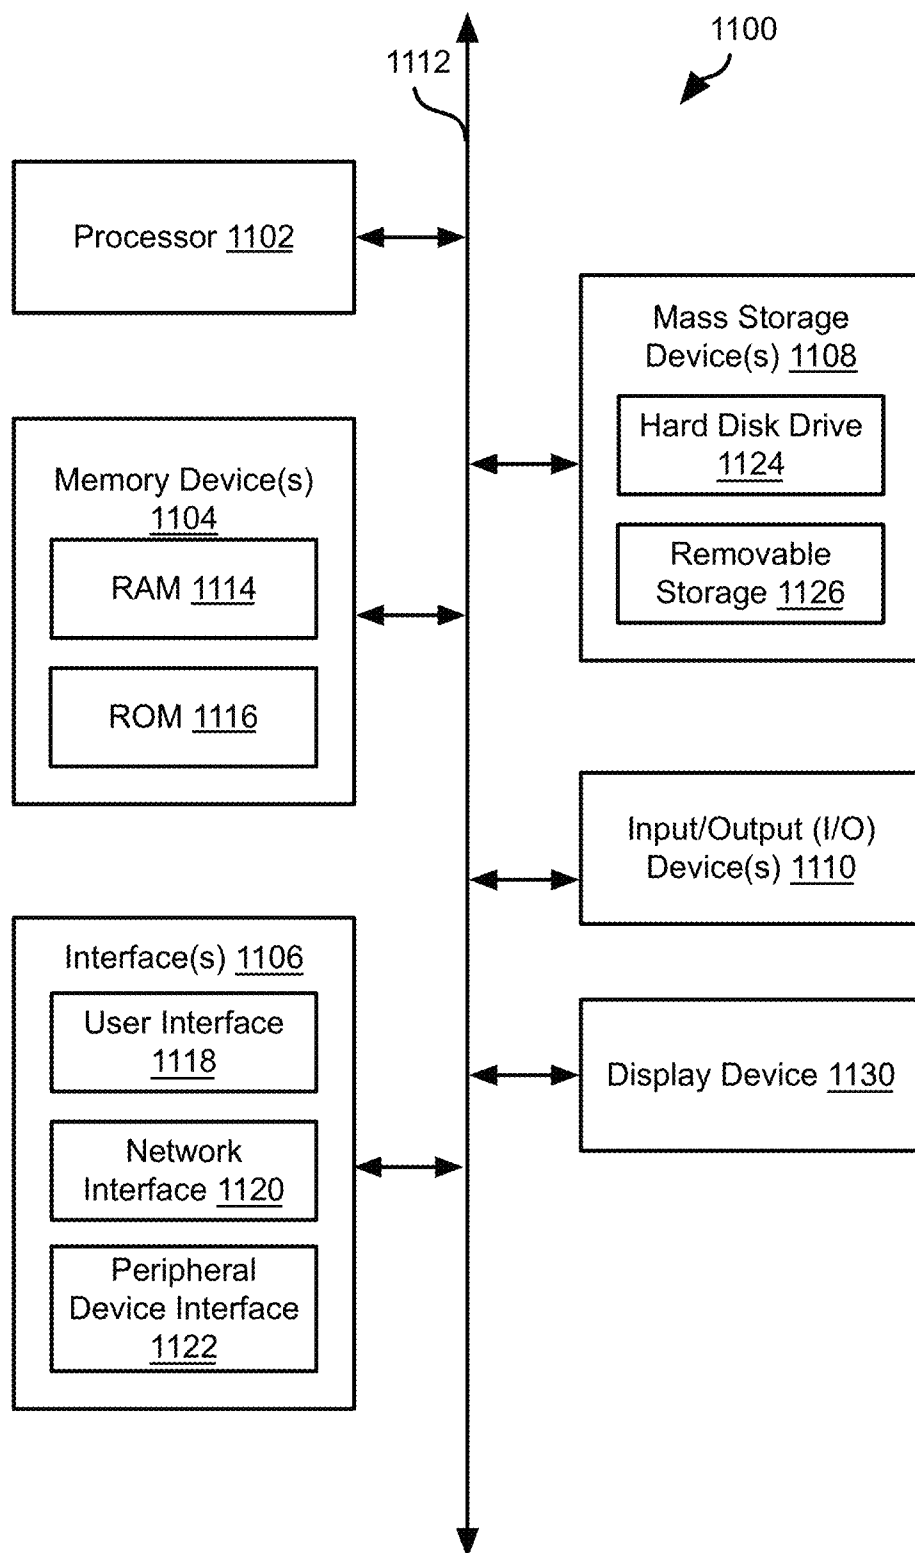


Fig. 11

DECEIVING ATTACKERS ACCESSING ACTIVE DIRECTORY DATA

RELATED APPLICATIONS

This application is a continuation-in-part of U.S. application Ser. No. 15/383,522, filed Dec. 19, 2016, and entitled DECEIVING ATTACKERS IN ENDPOINT, which is hereby incorporated herein by reference in its entirety.

BACKGROUND

Once an end point system is compromised, attackers try to move laterally in the network. Attackers harvest data from end point systems and then use that information to move laterally. The systems and methods disclosed herein provide an improved approach for preventing unauthorized access to application data on endpoint systems.

BRIEF DESCRIPTION OF THE FIGURES

In order that the advantages of the invention will be readily understood, a more particular description of the invention briefly described above will be rendered by reference to specific embodiments illustrated in the appended drawings. Understanding that these drawings depict only typical embodiments of the invention and are not therefore to be considered limiting of its scope, the invention will be described and explained with additional specificity and detail through use of the accompanying drawings, in which:

FIG. 1 is a schematic block diagram of a network environment for performing methods in accordance with an embodiment of the present invention;

FIG. 2 is a diagram illustrating components for preventing unauthorized access to application data in accordance with an embodiment of the present invention;

FIGS. 3A and 3B are process flow diagrams of methods for preventing unauthorized access in accordance with an embodiment of the present invention;

FIG. 4 is a schematic block diagram of an alternative network environment for performing methods in accordance with an embodiment of the present invention;

FIG. 5 is a diagram illustrating components for preventing unauthorized access to active directory data in accordance with an embodiment of the present invention;

FIG. 6 is a process flow diagram of a method for preventing unauthorized access to active directory data in accordance with an embodiment of the present invention;

FIG. 7 is a diagram illustrating components for preventing unauthorized access to domain data in accordance with an embodiment of the present invention;

FIG. 8 is a process flow diagram of a method for preventing unauthorized access to domain data in accordance with an embodiment of the present invention;

FIG. 9A is a schematic block diagram illustrating exploitation of an active directory server using an infected endpoint;

FIG. 9B is a schematic block diagram illustrating prevention of exploitation of an active directory server using an infected endpoint in accordance with an embodiment of the present invention;

FIG. 10 is a process flow diagram illustrating the use of decoy session data in accordance with an embodiment of the present invention; and

FIG. 11 is a schematic block diagram of a computer system suitable for implementing methods in accordance with embodiments of the present invention.

DETAILED DESCRIPTION

It will be readily understood that the components of the invention, as generally described and illustrated in the Figures herein, could be arranged and designed in a wide variety of different configurations. Thus, the following more detailed description of the embodiments of the invention, as represented in the Figures, is not intended to limit the scope of the invention, as claimed, but is merely representative of certain examples of presently contemplated embodiments in accordance with the invention. The presently described embodiments will be best understood by reference to the drawings, wherein like parts are designated by like numerals throughout.

Embodiments in accordance with the invention may be embodied as an apparatus, method, or computer program product. Accordingly, the invention may take the form of an entirely hardware embodiment, an entirely software embodiment (including firmware, resident software, micro-code, etc.), or an embodiment combining software and hardware aspects that may all generally be referred to herein as a “module” or “system.” Furthermore, the invention may take the form of a computer program product embodied in any tangible medium of expression having computer-usable program code embodied in the medium.

Any combination of one or more computer-usable or computer-readable media may be utilized. For example, a computer-readable medium may include one or more of a portable computer diskette, a hard disk, a random access memory (RAM) device, a read-only memory (ROM) device, an erasable programmable read-only memory (EPROM or Flash memory) device, a portable compact disc read-only memory (CDROM), an optical storage device, and a magnetic storage device. In selected embodiments, a computer-readable medium may comprise any non-transitory medium that can contain, store, communicate, propagate, or transport the program for use by or in connection with the instruction execution system, apparatus, or device.

Computer program code for carrying out operations of the invention may be written in any combination of one or more programming languages, including an object-oriented programming language such as Java, Smalltalk, C++, or the like and conventional procedural programming languages, such as the “C” programming language or similar programming languages, and may also use descriptive or markup languages such as HTML, XML, JSON, and the like. The program code may execute entirely on a computer system as a stand-alone software package, on a stand-alone hardware unit, partly on a remote computer spaced some distance from the computer, or entirely on a remote computer or server. In the latter scenario, the remote computer may be connected to the computer through any type of network, including a local area network (LAN) or a wide area network (WAN), or the connection may be made to an external computer (for example, through the Internet using an Internet Service Provider).

The invention is described below with reference to flowchart illustrations and/or block diagrams of methods, apparatus (systems) and computer program products according to embodiments of the invention. It will be understood that each block of the flowchart illustrations and/or block diagrams, and combinations of blocks in the flowchart illustrations and/or block diagrams, can be implemented by computer program instructions or code. These computer program instructions may be provided to a processor of a general purpose computer, special purpose computer, or other programmable data processing apparatus to produce a

machine, such that the instructions, which execute via the processor of the computer or other programmable data processing apparatus, create means for implementing the functions/acts specified in the flowchart and/or block diagram block or blocks.

These computer program instructions may also be stored in a non-transitory computer-readable medium that can direct a computer or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable medium produce an article of manufacture including instruction means which implement the function/act specified in the flowchart and/or block diagram block or blocks.

The computer program instructions may also be loaded onto a computer or other programmable data processing apparatus to cause a series of operational steps to be performed on the computer or other programmable apparatus to produce a computer implemented process such that the instructions which execute on the computer or other programmable apparatus provide processes for implementing the functions/acts specified in the flowchart and/or block diagram block or blocks.

Referring to FIG. 1, the methods disclosed herein may be practiced in a network environment **100** including a plurality of domains **102a-102c**. The domains **102a-102c** may be any network division, such as a subnet, local area network (LAN), virtual local area network (VLAN), or the like. The domains **102a-102c** may be distributed within a same building or over a large geographic area with interconnecting links including the Internet **104**. The illustrated domains **102a-102c** may represent one or more network components, such as routers, switches, servers, and the like that implement routing of traffic within the domains **102a-102c** and control traffic flowing into and out of the domains **102a-102c**.

Each domain may include one or more endpoints **106a-106g**. The endpoints **106a-106g** are production computing devices that operate as personal computers for users or servers providing production services to other endpoints or to external computers accessing the network environment by way of the internet **104**. The endpoints **106a-106g** may be desktop or laptop computers, mobile phones, tablet computers, server computers, and any other type of computing device. Some endpoints **106a-106g** may include internet-enabled devices, i.e. so-called internet of things (IoT) devices that are often a vulnerability.

The endpoints **106a-106g** are not dedicated honeypots, but rather perform non-decoy functions and process legitimate production data and legitimate production tasks of an enterprise, such as functioning as user computers executing applications such as word processors, browsers, graphics programs etc. The endpoints **106a-106g** may also function as web servers, database servers, remote login servers, application servers, and the like.

Some or all of the endpoints **106a-106g** execute a sensor module **108**. The sensor module **108** stores or accesses a list of sanctioned applications **110a** and may also store or access a listing or description of protected data **110b**. The endpoints **106a-106g** may execute one or more instances of one or more of the sanctioned applications **110a** and store data generated or used by these applications that corresponds to the protected data. The sanctioned applications **110a** are production applications for performing any of the production tasks and functionality mentioned above. Accordingly, the protected data **110b** may also be production data for use in performing the production tasks and functionality mentioned above, as opposed to decoy or deception data.

The sensor module **108** may store or access deception data **110c** stored locally on the endpoint **106a-106g** or accessed from another location. The deception data **110c** may mimic the format of production data in the form of web pages, word processor documents, spreadsheets, databases, etc. The deception data **110c** may also mimic other files used by applications such as credentials for authenticating the application with a remote server, configuration files, browser histories, a listing of recently accessed files, configuration files, and the like.

In the case of credentials or other files that are used to access a remote server or provide a record of accessing a remote server, the deception data **110c** may reference a BOTSINK **120**. The BOTSINK **120** may function as a honey pot programmed to engage an attacker while preventing access to production data or computer systems. For example, the BOTSINK **120** may execute one or more virtual machines implementing network services that engage and monitor malicious code while preventing access to other endpoints **106a-106g** of the network. The BOTSINK **120** may implement any of the method methods for detecting and engaging malicious code disclosed in the following applications (herein after “the incorporated applications”), which are hereby incorporated herein by reference in their entirety:

U.S. application Ser. No. 14/458,026, filed Aug. 12, 2014, and entitled DISTRIBUTED SYSTEM FOR BOT DETECTION;

U.S. application Ser. No. 14/466,646, filed Aug. 22, 2014, and entitled EVALUATING URLS FOR MALICIOUS CONTENT;

U.S. application Ser. No. 14/549,112, filed Nov. 20, 2014, and entitled METHOD FOR DIRECTING MALICIOUS ACTIVITY TO A MONITORING SYSTEM;

U.S. application Ser. No. 15/157,082, filed May 17, 2016, and entitled EMULATING SUCCESSFUL SHELLCODE ATTACKS;

U.S. application Ser. No. 14/805,202, filed Jul. 21, 2015, and entitled MONITORING ACCESS OF NETWORK DARKSPACE;

U.S. application Ser. No. 14/965,574, filed Dec. 10, 2015, and entitled DATABASE DECEPTION IN DIRECTORY SERVICES;

U.S. application Ser. No. 15/142,860, filed Apr. 29, 2016, and entitled AUTHENTICATION INCIDENT DETECTION AND MANAGEMENT;

U.S. application Ser. No. 15/153,471, filed May 12, 2016, and entitled LURING ATTACKERS TOWARDS DECEPTION SERVERS;

U.S. application Ser. No. 15/204,779, filed Jul. 7, 2016, and entitled DETECTING MAN-IN-THE-MIDDLE ATTACKS; and

U.S. application Ser. No. 15/360,117, filed Nov. 23, 2016, and entitled IMPLEMENTING DECOYS IN NETWORK ENDPOINTS.

In some embodiments, the data **110a-110c** is provided to the endpoints **106a-106g** by a management server **112**. The management server **112** may implement an application policy module **114**. The application policy module **114** stores or accesses a listing **116a** of sanctioned applications and may provide an interface for an administrator to specify what applications are included in the listing **116a**. The listing **116a** may indicate which applications are sanctioned for particular endpoints **106a-106g** or for endpoints in a particular domain **102a-102c**. The listing **116a** may be automatically updated to include applications as they are installed on endpoints **106a-106g** by an administrator.

In a similar manner, the management server **112** may store or access protected data **116b** that lists data files, folders, or other descriptors of data that are protected. The protected data **116b** may be obtained automatically from configuration files for applications. For example, an application on installation will often create directories for files used by the application. Accordingly, these directories and files may be observed by analyzing the configuration files for instructions to create these directories and files or by observing how the file system changes following installation of the application on a sample endpoint.

The management server **112** may also store or access deception data **118**. As noted above, this deception data may mimic production data for one or more applications and may reference the BOTSINK **120** in order to lure attackers into engagement with the BOTSINK **120**.

The management server **112** distributes some or all of the data **116a-116b**, **118** to the endpoints **106a-106g**. For example, deception data **118** provided to an endpoint may mimic files generated or used by one or more production applications actually installed on that endpoint. Likewise, the listing of sanctioned applications **116a** provide to the endpoint may include only those applications that were installed by an administrator or authorized user on that endpoint. The deception data **118** provided to the endpoint may then include deception data mimicking the production data of those applications. The management server **112** may periodically update the data **116a-116b**, **118** and distribute updated data to the endpoints **106a-106g**.

The methods disclosed herein are invoked in response to an attacker system **122** attempting to access production application data on an endpoint **106a-106g**. This may include the attacker system **122** issuing commands to the endpoint **106a-106g** or uploading malicious code to the endpoint **106a-106g**, which then attempts to access the production application data. However, unauthorized access may be prevented using the methods disclosed herein in either case.

Referring to FIG. 2, the sensor module **108** may be incorporated into the operating system **200**, such as by modifying the functions of one or more libraries for performing access to a file system. The sensor module **108** intercepts file system command from instances of applications **202** installed on the endpoint as well as file system commands from an attacker, such as an attacker tool **204** executing on the endpoint. The file system commands that are intercepted may include write commands, read commands, delete commands, or instructions to list the contents of a directory or other commands to navigate through a directory.

The sensor module **108** evaluates a source of each command, e.g. the binary instance executing on the endpoint that issued the command to the operating system. If the source of the command is an application listed in the sanctioned applications **110a**, the command is passed to the file system I/O (input output) functions **206** of the operating system **200**, which then executes the command with respect to the production application data **208**.

If the source of the command is not found to be in the sanctioned applications **110a**, the command may be modified such that it refers to deception data **110c**. The modified command may then be input to the file system I/O functions **206**. In the case of a write or delete command, the sensor module **108** may suppress execution of the command and return an acknowledgment to the source of the command indicating that the command was executed successfully.

In the embodiment of FIG. 2, the modified commands are executed by the same file system I/O functions **206** as other commands. Accordingly, the deception data **110c** may be stored in the file system and accessible to such functions **206**. However, the deception data **110c** may be hidden such that it is not viewable by users or applications executing on the endpoint.

In other embodiments, the sensor module **108** itself may access and return the deception data **110c**, in which case the deception data **110c** may be stored anywhere, including remotely from the endpoint and referenced by the sensor module **108**. The deception data **110c** could, for example, be encrypted such that only the sensor module **108** can decrypt the deception data **110c** in order to return it in response to a read command from the attacker tool **204** or other unauthorized source.

In still other embodiments, the sensor module **108** may automatically generate deception data **110c** in response to file system commands, such as based on templates that are populated with random data in order to mimic a type of file requested by the file system command from the attacker tool **204**.

Referring to FIG. 3A, the sensor module **108** may include any executable code programmed to execute the illustrated method **300a**. The method **300a** may include receiving **302** a file system command, such as by intercepting a command made to the operating system **200** of the endpoint in which the sensor module **108** is embedded.

The method **300a** may include evaluating **304** whether the data (file, directory, type of file, etc.) is protected data, such as might be indicated by the listing **110b** of protected data on the endpoint. If not, the method **300a** may include executing **306** the file system command without modification, i.e. passing it to the operating system **200** for execution. In some embodiments, only the sanctioned applications **110a** are permitted to issue file system commands, which may include operating system utilities. Accordingly, in some embodiments, step **304** may be omitted.

The method **300a** may further include evaluating a source of the file system command according to some or all of steps **308-312**. For example, if the source of the file system command is found **308** to have a certificate matching that of a sanctioned application **110a**, then file system command may be executed **306** with respect to the data referenced in the command.

If a hash, e.g. the SHA-1 (secure hash algorithm) hash of the binary code that issued the file system command is found **310** to match a hash of the binary executable for one of the sanctioned applications **110a**, then the file system command may be executed **306** with respect to the data referenced in the command.

If a path to the binary code that issued the file system command is found **312** to match the path to the binary executable of one of the sanctioned applications **110a**, then the file system command may be executed **306** with respect to the data referenced in the command.

Steps **308-312** are just examples of checks that may be used to verify whether binary code issuing a command is in fact an instance of a sanctioned application. In some embodiments, all of steps **308-312** must be satisfied before step **306** will be executed with respect to the data referenced in the command. In other embodiments, other checks may be used as alternatives or as additional requirements before step **306** will be executed with respect to the data referenced in the command.

In some embodiments, certain protected data may be bound to a particular sanctioned application **110a**. Accord-

ingly steps **308-312** may be evaluated only for those applications that are bound to the protected data **110b** referenced in the file system command, i.e. the command will be executed with respect to the data referenced in the command only if one of **308-312** (or each and every one of **308-312** in some embodiments) is satisfied for at least one sanctioned application **110a** that is also bound to the protected data **110b** referenced in the file system command.

If the tests of steps **308-312** are not sufficient to invoke execution of step **306** for the data referenced in the file system command according to any of the embodiments mentioned above, then the source of the file system command may be determined not to be one of the sanctioned applications **110a** and processing continues at steps **314**, **318**.

If the file system command is found **314** to be a read comment, then file system command may be changed **318** to refer to the deception data **110c** of the endpoint. Step **306** may be executed with respect to the modified file system command, which will include returning the deception data referenced by the modified file to the source of the file system command, such as to the attacker tool **204**.

If the file system command is found **316** not to be a read command, such as in the case of a write or a delete command, then the file system command is ignored and a simulated acknowledgment of the command is returned **316** to the source of the file system command.

Referring to FIG. 3B, in some embodiments, the sensor module **108**, or a different sensor module **108** may execute the illustrated method **300b** with respect to commands other than file system commands. In some embodiments, a plurality of sensor modules **108** execute on the endpoint and each sensor module **108** may intercept a different types of command. Each sensor module will then execute the method **300a** or **300b** upon intercepting that type of command. For example, requests to modify, delete, or read information regarding processes executing on the endpoint, the registry of the endpoint, or an application programming interface (API) available to applications executing on the endpoint. The method **300b** may include receiving **320** a command and evaluating **322** whether the command references protected data or is a protected command. If not, then the command may be executed **324**. For example, the protected data **110b** may indicate which commands are restricted to sanctioned applications **110a** in addition to data or types of data that are protected. In some embodiments, only sanctioned applications are permitted to access any data or invoke execution of any command. Accordingly, step **322** may be omitted as a path to execution **324** of a command.

The method **300b** may further include evaluating the source of the command of step **320** according to steps **308-312** in the same manner as for the method **300a**. If the conditions of steps **308-312** are met, then the command may be executed in the same form it was received. As for the method **300a**, all of steps **308-312** must have a positive result before the command is executed **324** and one or more additional tests may be required to be satisfied before the command is executed **324** without modification.

If the steps **308-312** indicate that the source is a sanctioned application, then the method **300b** may include evaluating **326** whether the command is a request for information, such as a request for information regarding executing processes, the registry, available APIs, or other system information. If so, then deception data is returned **328** to the source of the command. As for other embodiments disclosed

herein, the deception data that is returned may mimic the legitimate data that is requested but not correspond to actual system data.

If the command is not a request for information, the method **300b** may include returning **330** a result that simulates successful execution of the command. As for the method **300a**, a delete command may indicate that data was successfully deleted, a modify command may indicate that the system data or process or operating parameter referenced in the command was modified as requested.

An example of the use of the method **300a** may include the browser history for a browser. For example, the FIREFOX browser history may be stored at C:\Users\<user name>\AppData\Roaming\Mozilla\Firefox\Profiles\<some profile number>.default\formhistory.sqlite. Ordinarily, only the FIREFOX browser should access this file inasmuch as it will include functions for displaying the browser history on request. Accordingly, any other application attempting to access this file or its directory may be blocked by the sensor module **108** and instead receive a simulated browser history file including decoy data.

In another example, in WINDOWS, the "shadowcopy delete" command deletes the volume shadow copies. Malware often deletes this to accessing of backup volumes. Accordingly, this file may be listed as protected data **110b** and sensor module **108** will detect attempts to delete the volume shadow copies by non-sanctioned applications and prevent their execution. As noted above, acknowledgments of such commands may be returned indicating that the volume shadow copies were in fact deleted.

In an example of the use of the method **30b**, an attacker, e.g. attacker tool **122**, tries to access the registry, which may be in a listing of protected data **110b**. For example, the attacker may attempt to read the registry to determine a registry key for one or more antivirus application (e.g., MCAFEE, SYMANTEC, or the like) is present in the registry. No legitimate application would generally need to access the registry to determine whether an antivirus application is installed. In some embodiments, the sensor module **108** may intercept such attempts and return a result including a registry key for the antivirus tool, regardless of whether the antivirus application is installed. In many cases, this will cause the attacker tool to refrain from installing itself or otherwise attempting to perform malicious activities.

In another example, the attacker, e.g. attacker tool **122**, seeks to determine whether the endpoint is a virtual machine (VM), such as by evaluating the registry to determine whether a hypervisor is installed and/or executing on the endpoint. The sensor module **108** intercepts these requests and returns an output indicating that the endpoint is executing a VM, e.g. indicate that the current operating environment in which the command was received is a VM or that a hypervisor is installed and/or executing on the endpoint. In another example, the attacker, e.g. attacker tool **122**, seeks to view a list of processes executing on the endpoint. In response, the sensor module **108** will return a "correct list of processes list" to the attacker.

Referring to FIG. 4, the network environment **100** may further include an active directory server **402** in one or more of the domains **102a-102c**. The active directory server **402** may implement a directory service. A directory service functions as databases that map and store the names of network resources to their respective network addresses. Users referencing network objects need not remember the physical address of the object. The directory may store network resources and those resources may or may not have

a name. The directory can also store user identifiers (very common), departments of user identifiers, access level of user identifiers, hosts accessible by user identifiers, the access level associated with each user identifier. The directory may further store organizational details, a network topology, an IT policy, and the like. Although Active Directory, the most popular directory server, depends on DNS very heavily, it is distinct therefrom and provides much more than a simple mapping between domain names and IP addresses. In particular, directory services may perform authentication for access to resources as well. LDAP (Lightweight Directory Access Protocol) is one of the popular methods available to access the data in directory services. LDAP also provides authentication and authorization to let user access resources in directory services.

The directory service implemented by the active directory server **402** may provide authorization and access to key assets in corporate networks. Attackers may use various methods of exploitation to get unauthorized access to directory services. Once an attacker obtains access to a directory service, the attacker can easily log into key servers, databases etc. by impersonating credentials stored in directory services. The attacker may then exfiltrate data. For example, confidential data may be disclosed. In some instances, unauthorized modifications could be made (such as new account creation, access control modifications, document forgery, backup corruption, unauthorized financial transactions etc.) or data may be made unavailable (such as crypto malware, bank account takeover, bringing down or defacement of corporate web servers).

The systems and methods disclosed herein incorporate database deception into directory services so that attackers cannot differentiate between real production assets with respect to fake assets. Once an attacker access fake credentials pointing to a BOTSINK **120**, the system prevents outbound access and simulates access to actual enterprise assets. This enables the identification and analysis of attackers for use in preventing data breaches.

“Active Directory” (AD) is one of the directory services supported by WINDOWS operating systems. The AD domain controller is a server that provides authentication services within a domain whereby it provides access to computer resources. AD provides a database storing information about objects. Each object can be a user, computer, or a group of users. Although the systems and methods disclosed herein are described for use with an Active Directory system, they may be applied with equal effectiveness to any directory service.

The systems and methods described herein returns simulated responses to requests to an active directory server **402**. These responses reference the BOTSINK **120** and may include credentials for authenticating with respect to the BOTSINK **120**, such as a user account defined on the BOTSINK **120** or a service executing on the BOTSINK **120**. These responses lure an attacker to use the service or to attempt to use the user account. However, use of such services or accounts results in engagement of the attacker with the BOTSINK **120** and other resources described herein. This enables early detection of malicious intent and account misuse and diverts attention from real targets and resources.

Referring to FIG. **5**, in some embodiments, the sensor module **108** on an endpoint **106a-106g** may detect responses from an active directory server **402**. These responses may be the result of requests issued to the active directory server **402** by an application **202** or attacker tool **204** executing on that endpoint **106a-106g**. For example, the sensor module **108**

may operate in conjunction with substituted or modified functions in an active directory API (application programming interface) in the operating system **200** of an endpoint **106a-106g**. The substituted or modified functions may route responses from the active directory server **402** to the sensor module **108** prior to return of the response to the application that requested it. The sensor module **108** may then determine whether to return the response to an application **202** to which the response is addressed without modification or with modification. In particular, if the response is addressed to an attacker tool **204** that is not a sanctioned application, the response may be modified such that any system, user account, or credential included in the response is replaced with corresponding references to the BOTSINK **120**, decoy computer on the BOTSINK **120**, a credential or user account for authenticating with the BOTSINK **120** (e.g., logging in, accessing a particular service, etc.).

The manner in which the application to which the response is addressed is determined to be sanctioned or not may be according to the approach described in either of FIGS. **3A** and **3B**. In particular, the response from the active directory server **402** may be received on a port with respect to which an application is registered by the operating system **200**. Accordingly, the sensor module **108** may evaluate that application to determine whether it is sanctioned according to the approach of either of FIGS. **3A** and **3B**. If not, the response is modified at step **606** to replace references to addresses, actual user accounts, services, computer systems, or other production resources with corresponding references to the BOTSINK **120**, i.e. an address of the BOTSINK **120**, a decoy user account, decoy service, decoy virtual machine, or other decoy resource executing on the BOTSINK **120**.

Referring to FIG. **6**, the sensor module **108** may execute the illustrated method **600** with respect to responses from the active directory server **402**. The method **600** includes receiving **602** a response from the active directory server **402** by the sensor module **108**. The sensor module **108** evaluates **604** whether the application to which the response is addressed is sanctioned. For example, this may include evaluating an application listening to a port to which the response was addressed. Alternatively, the response may include some other identifier that is sufficient to identify the application (i.e. instance of an application executing on operating system **200** to which the response is addressed. As noted above, receiving the response may be performed by interfacing with an API programmed to interface with the active directory server **402** such that response are intercepted before they are returned to the requesting application. For example, the sensor module **108** may interface with substituted or modified versions of the Power Shell such that commands input to the Power Shell are intercepted and possibly modified by the sensor module **108**. Commands that may be intercepted may include commands such as ‘net group/domain “domain users”’ will return list of domain users present in Active Directory. Other example commands include ‘Get-ADComputer-Filter *’ will return all computer accounts in Active Directory, ‘nltest/dclist:domain name’ will return domains in the network.

The modified response is then returned **608** to the application to which it is addressed, i.e. the application that requested the information included in the response from the active directory server **402**. Where the application is found **604** to be sanctioned, the original response, or data from the response, is returned **608** to the source of the request without substituting references to the BOTSINK **120**.

Note that FIG. **6** illustrates the case where a response from the active directory service is received and modified. In

11

other embodiments, a request from an application that is not sanctioned that is addressed to the active directory service is intercepted and simulated response is generated that references the BOTSINK 120, i.e. a response that has an expected format corresponding to the request but with names of systems, addresses, credentials, services, etc. referencing such entities as implemented by the BOTSINK 120.

In some embodiments, the active directory server 402 may host decoy information describing a configuration of the BOTSINK 120, such as decoy information describing decoy users accounts, addresses of decoy systems (virtual machines), decoy services, and decoy credentials for accessing any of these accounts, systems, and services. Accordingly, modifying a request by the sensor module may include modifying the request such that it is a request for decoy information on the active directory server (e.g., references the BOTSINK 120) such that the response from the active directory server 402 includes only the decoy information rather than the information actually requested.

In some embodiments, authenticated users of an endpoint 106a-106g are added to a whitelist accessed by the sensor module 108 such that requests to the active directory server 402 and responses received are not substituted according to the method 600.

Referring to FIG. 7, in some embodiments, the sensor module 108 intercepts responses to requests to a domain controller 700. In some embodiments, the function of the domain controller 700 is performed by a domain joined computer. For example, the sensor module 108 may monitor one or both of requests to a network API 702 of the operating system 200 to the domain controller 700 and responses to such requests.

For example, referring to the method 800 of FIG. 8, the responses may be responses to requests for session data issued received 802 from a network API 702. A response determined 804 to be to a non-sanctioned application may be modified at step 806 to refer to the BOTSINK 120 and returned 808 to the non-sanctioned application. In one scenario, an attacker tool 204 executing on an infected endpoint (e.g., endpoint 106a) requests session data from the domain controller 700 or domain joined computer 700 using information learned via earlier active directory queries.

Responses determined 804 to be in response to requests from sanctioned applications 202 may be returned 808 to them without replacing a reference to a computer system in the response with a reference to the BOTSINK 120. The manner in which an application is determined 804 to be sanctioned may be performed in the same manner described above with respect to either of FIGS. 3A and 3B.

FIGS. 9A and 9B illustrate how the methods 600 and 800 may be used to redirect and occupy an attacker. In an unprotected case shown in FIG. 9A, an attacker tool 204 on an infected endpoint 106a uses the active directory API on the infected system to access an active directory database 900 through the active directory server 402. Using this information, the attacker tool 204 uses the network API to request session data in order to identity of an endpoint 106b logged in to the domain account for a domain to which infected endpoint 106a belong. The The attacker tool may infect the administrator endpoint 106b and access the active directory database 900 and discover that the admin user account is referenced in domain data 904 defining another group, e.g. an administrator group. The endpoint 106b may further store credentials enabling the endpoint 106b to access a service hosted by server 106f.

12

Accordingly, the attacker tool 204 on the infected system 106a may attempt to move laterally by requesting information from the active directory server 402 in order to discover the endpoint 106b of the admin user account, infect it, and use it to access the service on server 106f as an administrator.

FIG. 9B illustrates an alternative view seen by an attacker tool 204 on the infected endpoint 106a when the methods according to FIGS. 4 through 6 are implemented. The attacker tool 204 requests information from the active directory server 402. The responses to these requests are modified to reference decoy information, such as decoy active directory data 906 having a same format as the active directory database 900 but with references to computer systems and services being replaced with references to the BOTSINK 120 (e.g. virtual machines executing on the BOTSINK 120) and services executing on the BOTSINK 120.

A response to a request to obtain the identity of an administrator of a domain to which the endpoint 106a belongs using the network API is intercepted and modified to reference to a decoy domain 908. A request for the identity of the administrator of the decoy domain 908 may include a reference to a user account 912 or virtual machine logged in to a user account 912 on the BOTSINK 120. That user account 912 may be defined as part of an admin domain 910 and that user account 912 may include credentials (e.g., VM for which the user account 912 is logged in may store or reference credentials) that are sufficient to authenticate a user with respect to a service 914 executing on the BOTSINK 120.

Accordingly, the attacker tool 204 may attempt to move laterally as in the case of FIG. 9A but only engage the BOTSINK 120. The activities of the attacker tool 204 may be monitored and logged by the BOTSINK 120 in order to characterize the attacker tool 204 and alerts may be generated to alert and administrator to remove the attacker tool 204 from the infected endpoint 106a. Engaging, monitoring, logging, characterizing, and generation of alerts may be performed according to any of the approaches described in the incorporated applications.

FIG. 10 illustrates a method 1000 that may be implemented using the system shown in FIG. 9B. An attacker tool 204 executing on an infected endpoint (e.g., endpoint 106a) requests 1002 session data using a network API for the domain of the infected endpoint, the session data indicating computers (e.g., computers in the same domain) that are connected to the active directory server 402. For example, a network API command for requesting such session data may be used. The sensor module 108 intercepts 1004 a response to this request and determines that the attacker tool 204 is a non-sanctioned application attempting to access restricted data (see FIG. 6). In response, the sensor module 108 returns 1006 the session data with references to one or more computers in the session data replaced with one or more addresses assigned to the BOTSINK 120. In the alternative, the sensor module 108 intercepts the request for session data and creates a decoy response referencing the BOTSINK 120 rather than modifying a response from the active directory server 402.

In particular, the IP address of the computer logged in to the administrator account of the domain may be replaced with an IP address assigned to the BOTSINK 120. For example, the BOTSINK 120 may acquire IP addresses in various domains as described in the incorporated applications. Each address added to the session data may be assigned to a virtual machine (VM) executing on the BOTSINK 120.

13

The attacker tool **204** may then attempt to access **1008** the computer logged in to the administrator account, which is in fact the BOTSINK **120**. The BOTSINK **120** (e.g., the VM assigned the IP address represented as that of the administrator's computer at step **1006** ("the admin VM")) may then engage **1010** the attacker tool. The activities of the attacker tool **204** with respect to the BOTSINK **120** may be monitored and stored in order to characterize the attacker tool **204** as described in the incorporated applications.

In particular, the attacker tool **204** may attempt to obtain credentials or identifiers of services cached or stored by the admin VM. In response, these credentials may be returned **1012** to the attacker tool. However, these credentials or identifiers of services may reference services implemented by the BOTSINK **120**, such as by other VMs being executed by the BOTSINK **120**. The attacker tool **204** receives the credentials or identifiers and attempts to access **1014** the services represented by them.

In response, the BOTSINK **120** authenticates the attacker tool **204** and engages **1016** with the attacker tool **204** using the service, i.e. executes commands from the attacker tool in accordance with the service. Actions of the attacker tool **204** may be monitored and used to characterize the attacker tool **204** as described in the incorporated applications. In addition or as an alternative, interaction with the BOTSINK **120** at steps **1010**, **1012**, and **1016** by the attacker tool may trigger an alert or remedial action such as removing the attacker tool **204** from the infected endpoint **106a** or isolating (disconnecting) the infected endpoint **106a** from a network.

Note that in some embodiments, one of the services implemented on the BOTSINK **120** may be a decoy active directory service that implements an interface for responding to commands in the active directory API and is programmed to response to these commands with decoy data referencing decoy computers, user accounts, and services implemented on the BOTSINK **120**.

FIG. **11** is a block diagram illustrating an example computing device **1100** which can be used to implement the system and methods disclosed herein. The endpoints **106a-106g**, management server **112**, BOTSINK **120**, attacker system **122**, and active directory server **402** may also have some or all of the attributes of the computing device **1100**. In some embodiments, a cluster of computing devices interconnected by a network may be used to implement any one or more components of the invention.

Computing device **1100** may be used to perform various procedures, such as those discussed herein. Computing device **1100** can function as a server, a client, or any other computing entity. Computing device can perform various monitoring functions as discussed herein, and can execute one or more application programs, such as the application programs described herein. Computing device **1100** can be any of a wide variety of computing devices, such as a desktop computer, a notebook computer, a server computer, a handheld computer, tablet computer and the like.

Computing device **1100** includes one or more processor(s) **1102**, one or more memory device(s) **1104**, one or more interface(s) **1106**, one or more mass storage device(s) **1108**, one or more Input/Output (I/O) device(s) **1110**, and a display device **1130** all of which are coupled to a bus **1112**. Processor(s) **1102** include one or more processors or controllers that execute instructions stored in memory device(s) **1104** and/or mass storage device(s) **1108**. Processor(s) **1102** may also include various types of computer-readable media, such as cache memory.

14

Memory device(s) **1104** include various computer-readable media, such as volatile memory (e.g., random access memory (RAM) **1114**) and/or nonvolatile memory (e.g., read-only memory (ROM) **1116**). Memory device(s) **1104** may also include rewritable ROM, such as Flash memory.

Mass storage device(s) **1108** include various computer readable media, such as magnetic tapes, magnetic disks, optical disks, solid-state memory (e.g., Flash memory), and so forth. As shown in FIG. **11**, a particular mass storage device is a hard disk drive **1124**. Various drives may also be included in mass storage device(s) **1108** to enable reading from and/or writing to the various computer readable media. Mass storage device(s) **1108** include removable media **1126** and/or non-removable media.

I/O device(s) **1110** include various devices that allow data and/or other information to be input to or retrieved from computing device **1100**. Example I/O device(s) **1110** include cursor control devices, keyboards, keypads, microphones, monitors or other display devices, speakers, printers, network interface cards, modems, lenses, CCDs or other image capture devices, and the like.

Display device **1130** includes any type of device capable of displaying information to one or more users of computing device **1100**. Examples of display device **1130** include a monitor, display terminal, video projection device, and the like.

Interface(s) **1106** include various interfaces that allow computing device **1100** to interact with other systems, devices, or computing environments. Example interface(s) **1106** include any number of different network interfaces **1120**, such as interfaces to local area networks (LANs), wide area networks (WANs), wireless networks, and the Internet. Other interface(s) include user interface **1118** and peripheral device interface **1122**. The interface(s) **1106** may also include one or more user interface elements **1118**. The interface(s) **1106** may also include one or more peripheral interfaces such as interfaces for printers, pointing devices (mice, track pad, etc.), keyboards, and the like.

Bus **1112** allows processor(s) **1102**, memory device(s) **1104**, interface(s) **1106**, mass storage device(s) **1108**, and I/O device(s) **1110** to communicate with one another, as well as other devices or components coupled to bus **1112**. Bus **1112** represents one or more of several types of bus structures, such as a system bus, PCI bus, IEEE 1394 bus, USB bus, and so forth.

For purposes of illustration, programs and other executable program components are shown herein as discrete blocks, although it is understood that such programs and components may reside at various times in different storage components of computing device **1100**, and are executed by processor(s) **1102**. Alternatively, the systems and procedures described herein can be implemented in hardware, or a combination of hardware, software, and/or firmware. For example, one or more application specific integrated circuits (ASICs) can be programmed to carry out one or more of the systems and procedures described herein.

The invention claimed is:

1. A method comprising:

receiving, by a computer system, a first response from an active directory server;

(a) replacing, by the computer system, a first reference in the response with a second reference referencing a decoy server to obtain a modified response;

(b) returning, by the computer system, the modified response to a source application referenced by the first response,

15

wherein the first response is a response to a request for session data received from the active directory server; and

wherein the first reference is an address of an endpoint logged in to an administrator account on the active directory server.

2. The method of claim 1, further comprising:

intercepting, by an agent executing on the computer system, the first response from a function of an operating system on the computer system that is programmed to interface with the active directory server.

3. The method of claim 1, wherein the second reference is a credential to authenticate with respect to the decoy server.

4. The method of claim 3, wherein the second reference is effective to authenticate with respect to a service executing on the decoy server; and

wherein the method further comprises:

receiving, by the decoy server, an attempt to access the service by the source application using the second reference;

in response to the attempt, performing, by the decoy server, access of the service; and

monitoring, by the decoy server, activities of the source application with respect to the service.

5. The method of claim 1, further comprising performing (a) and (b) in response to determining, by the computer system, that the source application is not in a list of sanctioned applications.

6. The method of claim 5, wherein determining that the source application is not in the list of sanctioned applications comprises determining that the source application does not have a certificate matching one of the sanctioned applications.

7. The method of claim 5, wherein determining that the source application is not in the list of sanctioned applications comprises determining that a hash of binary code for the source application does not match a hash of one of the sanctioned applications.

8. The method of claim 5, wherein determining that the source application is not in the list of sanctioned applications comprises determining that a path to binary code corresponding to the source application does not match a path to one of the sanctioned applications.

9. The method of claim 5, further comprising:

receiving a third response from the active directory server;

(c) determining that the third response is addressed to a first sanctioned application that is one of the sanctioned applications; and

in response to (c), returning data from the third response to the first sanctioned application.

10. A system comprising one or more hardware processing devices and one or more memory devices operably coupled to the one or more hardware memory devices, the one or more hardware memory devices storing executable code effective to cause the one or more hardware processing devices to:

receive a first response from an active directory server;

(a) replace a first reference in the response with a second reference referencing a decoy server to obtain a modified response;

(b) return the modified response to a source application referenced by the first response,

16

wherein the first response is a response to a request for session data received from the active directory server; and

wherein the first reference is an address of an endpoint logged in to an administrator account on the active directory server.

11. The system of claim 10, wherein the executable code is further effective to cause the one or more hardware processing devices to:

intercept, by an agent executing on the system, the first response from a function of an operating system executing on the system that is programmed to interface with the active directory server.

12. The system of claim 10, wherein the second reference is a credential to authenticate with respect to the decoy server.

13. The system of claim 10, wherein the second reference is effective to authenticate with respect to a service executing on the decoy server further comprising the decoy server; and

wherein the system further comprises a decoy server that is programmed to:

receive an attempt to access the service by the source application using the second reference;

in response to the attempt, perform access of the service; and

monitor activities of the source application with respect to the service.

14. The system of claim 10, wherein the executable code is further effective to cause the one or more hardware processing devices to:

perform (a) and (b) in response to determining that the source application is not in a list of sanctioned applications.

15. The system of claim 14, wherein the executable code is further effective to cause the one or more hardware processing devices to:

determine that the source application is not in the list of sanctioned applications comprises determining that the source application does not have a certificate matching one of the sanctioned applications.

16. The system of claim 14, wherein the executable code is further effective to cause the one or more hardware processing devices to:

determine that the source application is not in the list of sanctioned applications comprises determining that a hash of binary code for the source application does not match a hash of one of the sanctioned applications.

17. The system of claim 14, wherein the executable code is further effective to cause the one or more hardware processing devices to:

determine that the source application is not in the list of sanctioned applications comprises determining that a path to binary code corresponding to the source application does not match a path to one of the sanctioned applications.

18. The system of claim 14, wherein the executable code is further effective to cause the one or more hardware processing devices to:

receive a third response from the active directory server;

(c) determine that the third response is addressed to a first sanctioned application that is one of the sanctioned applications; and

in response to (c), return data from the third response to the first sanctioned application.

* * * * *